

ASSEMBLY&INSTALLATION

Please read carefully and save these instructions,as you may need them a later date.

CAUTION

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.

GENERAL


All electrical connections must be in accordance with local and National Electrical Code(N.E.C) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

ASSEMBLY AND INSTALLATION

1. Carefully unpack the fixture, lay out all parts on a clean surface.
2. Connect the stems (18)(17) (16) (depending on desired height). Attach them to the nipple on the top couplings of the fixture (19). **(Note:connect the fixture(19) with the stem(18) or (17)at lease,and cannot install stem (16) separately.)**
3. Place canopy (15), flat plate (14), safety cable (13) and lock washer (12) over the swivel (9), secure with the hex nut (11) by using the **wrench(not included)**. (Note:The 90 ° swivel should be adjusted to the same direction)
4. Screw the rod (21) to the bottom socket of the fixture (19).
5. Thread two mounting screws (5) through the mounting plate (7) and secure with the hex nut. Attach mounting plate (7) to outlet box (1) using two outlet box screws (10).
6. With the help of a friend, lift the fixture. Hook safety cable (13) to mounting plate (7) to hold the fixture.
7. Pull out the outlet wire and ground wire from the outlet box, make wire connections with wire nuts (6) as follow:
 - Connect the smooth-coated wire (w marking) or Black wire from fixture to the Black wire (5) from power source.
 - Connect the ribbed-coated wire (w/o marking) or White wire from fixture to the White wire (2) from power source.
 - Attach the fixture ground wire to mounting plate (7) with the ground screw (8). Connect it to the house ground wire (4) with the wire nut (6). Position wires back inside outlet box (1).
8. **Attach the fixture canopy to the outlet box (1), secure it with the ball nut (22).**
9. Set shade (20) onto candle sleeve of the socket of the fixture (19).
10. Install the bulbs (not included). Make sure they do not exceed the maximum wattage specified on the fixture's wattage rating label.
11. Turn on the power.

INSTALLATION IS NOW COMPLETED

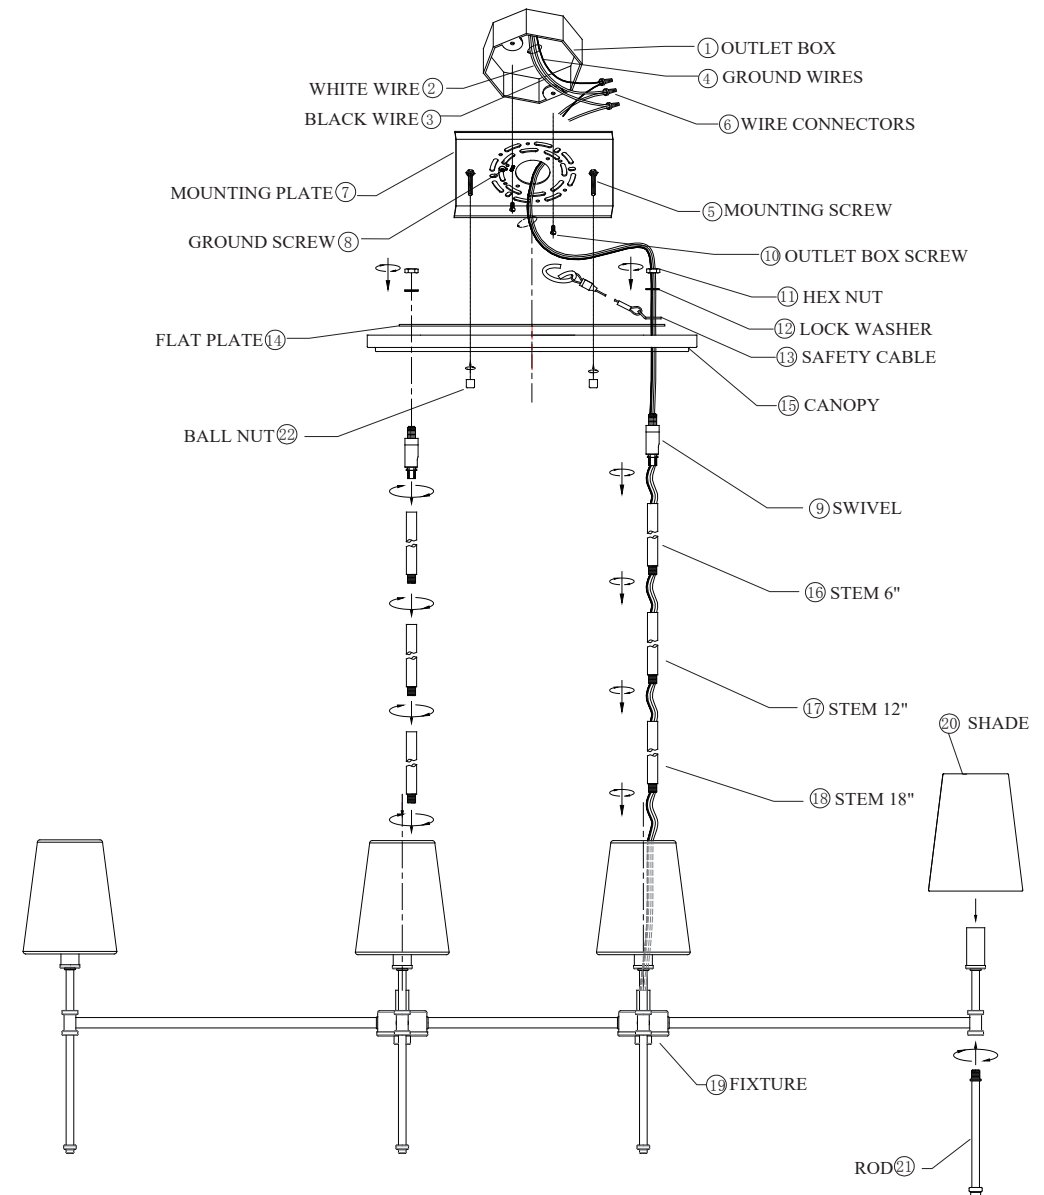

ITEM NO.: 16506