


- NOTES: UNLESS OTHERWISE SPECIFIED  
 1. INTERFACE SPECIFICATIONS, SEE MIL-STD-348, FIG. 304-2.  
 2. MATERIAL SPECIFICATIONS:  
 INSULATORS: TEFLON PER ASTM-D-4894  
 CENTER CONTACT: BERYLLIUM COPPER  
 ALL OTHER METAL PARTS: BRASS PER ASTM B-16  
 3. FINISH SPECIFICATIONS:  
 ALL METAL PARTS: SILVER PLATE PER QQ-S-365  
 4. ELECTRICAL SPECIFICATIONS:  
 NOMINAL IMPEDANCE: 50 OHMS  
 FREQUENCY RANGE: DC TO 11 GHZ  
 WORKING VOLTAGE 1000 VRMS

REV	DESCRIPTION	BY DATE	APPD
J	ER28920	12/30/10 BPA	PSM

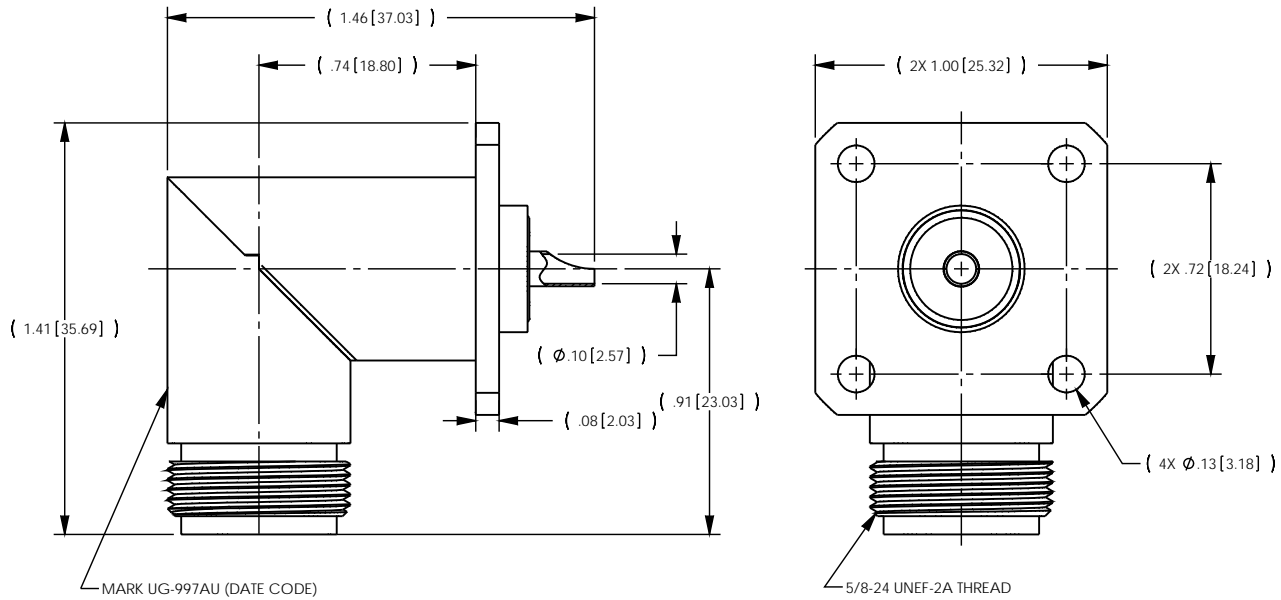

CATALOG P/N: UG-997A U

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES (MM) TOLERANCES: DECIMAL: XX [XX] ± .01 [0.3] XXX [XXX] ± .005 [0.13] XXXX [XXXX] ± .000X				<b>KINGS</b> by WINCHESTER <small>Winchester Electronics Corporation          62 Barnes Industrial Road North          Wallingford, Connecticut 06492</small>	
ANGLE: ± 2°      SCALE: 2:1				RECEPTACLE, PANEL ANG, N	
<b>CUSTOMER SALES DRAWING</b>		THIRD ANGLE			
DRAWN R14	DATE 08/16/94	APPROVED CJ	DATE 08/17/94		
APPROVED XXX	DATE XX/XX/XX	APPROVED XXX	DATE XX/XX/XX	<b>A</b>	SDUG-997A U
				SHIT 1	OF 1
				REV J	