


PART#: 14/4 k5503

DESCRIPTION: 4C/14 AWG 105 STRAND OXYGEN FREE COPPER SPEAKER CABLE,PVC JKT

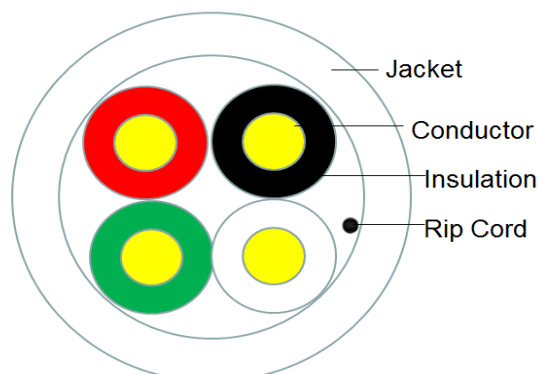

Regulatory

UL : UL 444 & UL 13, Type (UL) CMR/CL2R c(UL)
EU RoHS 2011/65/EU Compliant
EN50575: 2014 REACTION TO FIRE CLASS Eca

Application: Speaker cable

Construction Characteristics:

| | | |
|-------------|---------------|----------------------------------|
| Conductor | Material | Stranded Bare Copper |
| | Size | 14AWG X 4C(2.11mm ²) |
| | Construction | 105/0.16mm +/-0.004mm |
| Insulation | Material | PVC |
| | Min.Thickness | 0.33mm |
| | AVG.Thickness | 0.36mm |
| | Diameter | 2.7mm +/-0.10mm |
| | Colors | Black & Red & White & Green |
| Jacket | Material | PVC |
| | Min.Thickness | 0.60mm |
| | AVG.Thickness | 0.80mm |
| | Diameter | 8.0mm +/-0.20mm |
| | Rip Cord | Nylon |
| | Color | Per request |
| Bend radius | Min 15D/120mm | |

Electrical & Physical Characteristics:

| | | | |
|-----------------------------|------------------------|-------------------|--------------|
| Operating Temperature Range | - 20°C + 75°C | | |
| Conductor Resistance | Max 9.2 ohm/km at 20°C | | |
| Insulation Resistance | Min 50MΩ*km at 20°C | | |
| Dielectric Strength | Min AC1.5KV | | |
| Rated Voltage | Max 80Volts | | |
| Marking: | | | |
| Packaging: | | | |
| Approx.Weight | Approx.Dimension(mm) | Package | Packages per |
| 22kgs/48.501lbs | 270X100X300 | 500ft/REEL IN BOX | 27 |
| | 310X340X350 | | |