


This document, including the design, configuration and mechanical features revealed herein are the sole, confidential and proprietary property of TRU Corporation. Reproduction or use thereof, in whole or part, is prohibited without the prior written consent of TRU Corporation.

REV.	DESCRIPTION	DATE	APPROVED
-	ORIGINAL ISSUE	08/01/11	TRC

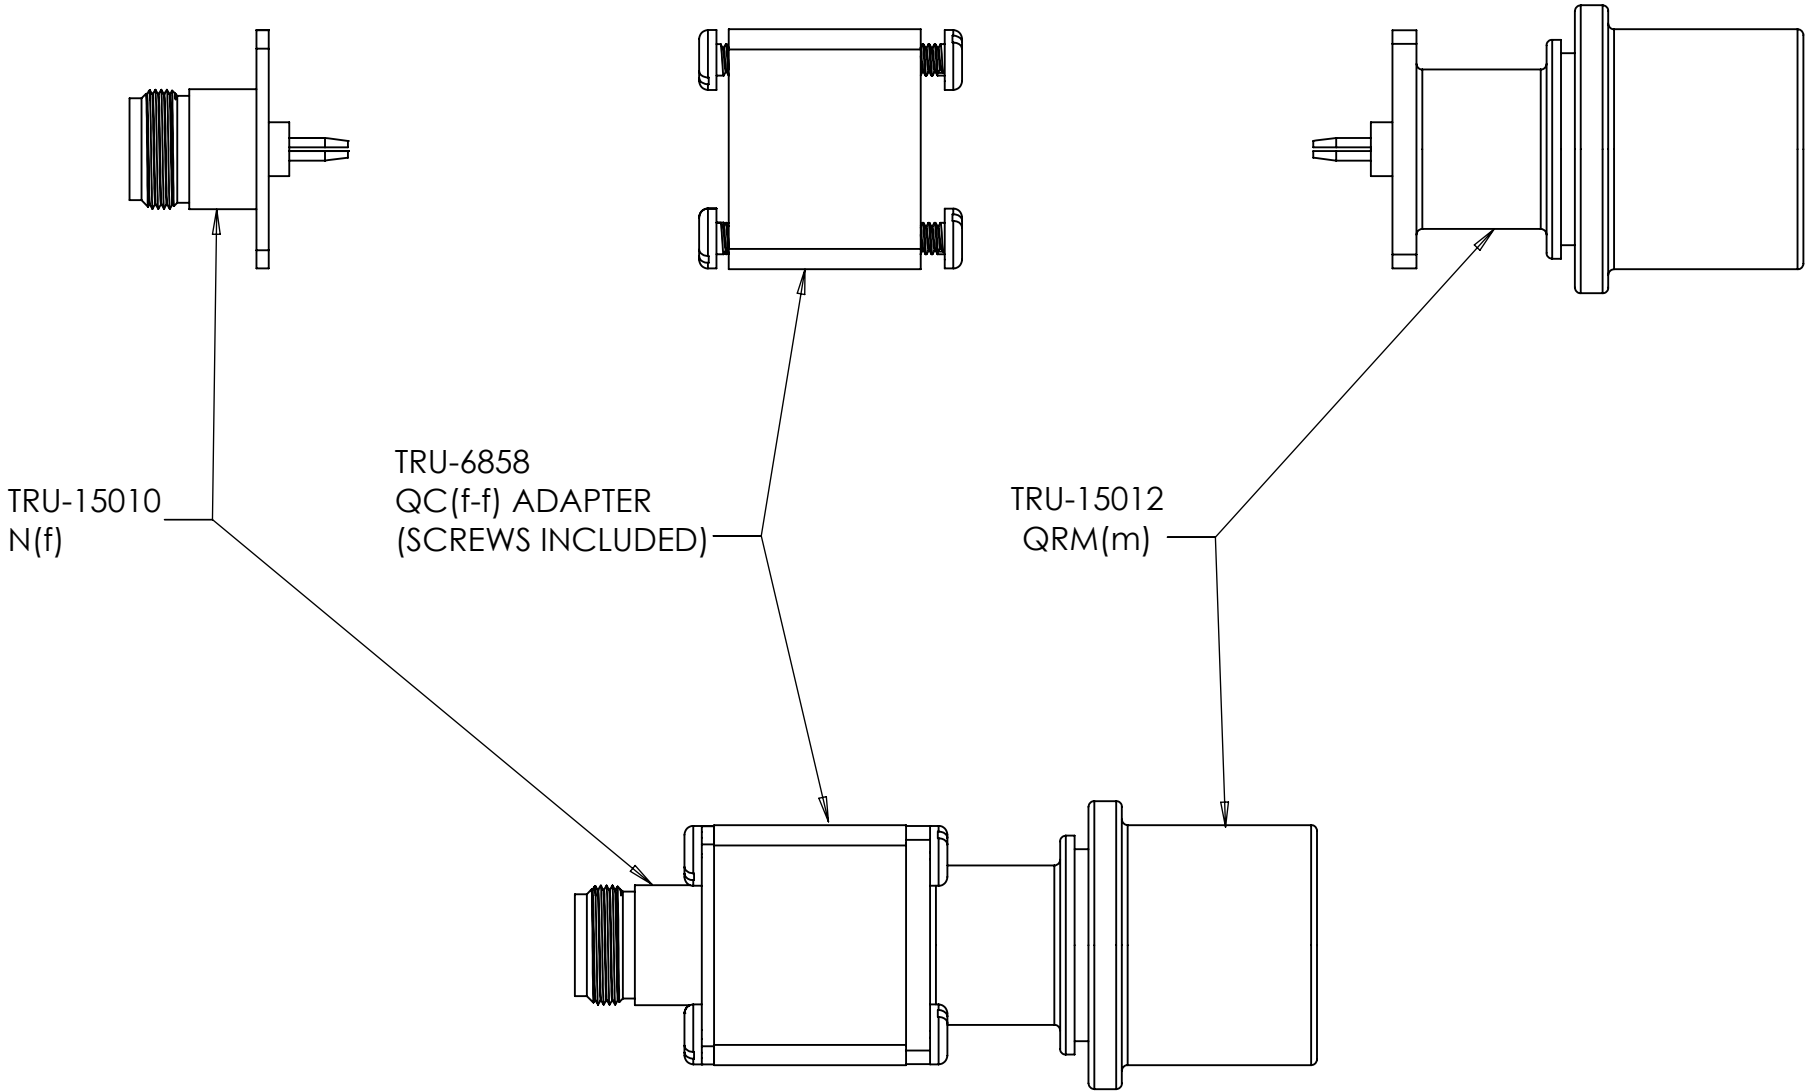

ENGINEERING DATA:



ELECTRICAL:
IMPEDANCE: 50 OHMS NOMINAL

MECHANICAL:
INTERFACE: N(f) PER MIL-STD-348 Fig.304.2
QRM(m)PER TRU SPEC

MATERIAL:
INSULATORS: PTFE (TEFLON)
CONTACTS: BRASS & BERYLLIUM COPPER
OTHER METAL PARTS: BRASS

FINISH:
BODIES: NICKEL PLATED
OTHER METAL PARTS: SILVER PLATED

NOTES:
1. UNLESS OTHERWISE SPECIFIED; ALL
DIMENSIONS ARE REFERENCE ONLY.

MATERIAL	DO NOT SCALE DRAWING		DRAWN TRC	DATE 08/01/11	<div>TRU CORPORATION 245 LYNNFIELD STREET, PEABODY, MA 01960 The Custom Interconnect Leader™</div>		
	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES		ENG APPR. TRC	DATE 08/01/11			
	TOLERANCES: FRACTIONS: ± 1/64 .XX : ±.01 .XXX: ±.005 ANGLES: ± 1/2°		MFG APPR.	DATE			
	COMMENTS:		OTHER APPR. AM	DATE 08/01/11	TITLE: ADAPTER ASSEMBLY N(f) to QRM(m) BLOCK ADAPTER		
surface area: sq inch		weight: lbs	THIRD ANGLE PROJECTION 		SIZE B	DWG. NO. TRU-8212-30	REV -
					CAGE CODE: 92180	SCALE: 1:1	SHEET 1 OF 1