


FIP X FIP VINYL FAUCET CONNECTOR

- Used for supplying water to faucets
- Working pressure: 124 PSI
- Inner core of PVC withstands temperatures of 68°F-158°F
- Quick and easy installation
- No special tools needed
- Flexible vinyl connector resists kinking and creasing
- Nickel plated nut
- cUPC listed
- Meets NSF/ANSI/CAN 372, NSF/ANSI/CAN 61: Q ≤0.5, and NSF/ANSI 14 standards
- ASME A112.18.6/CSA B125.6
- Lead free

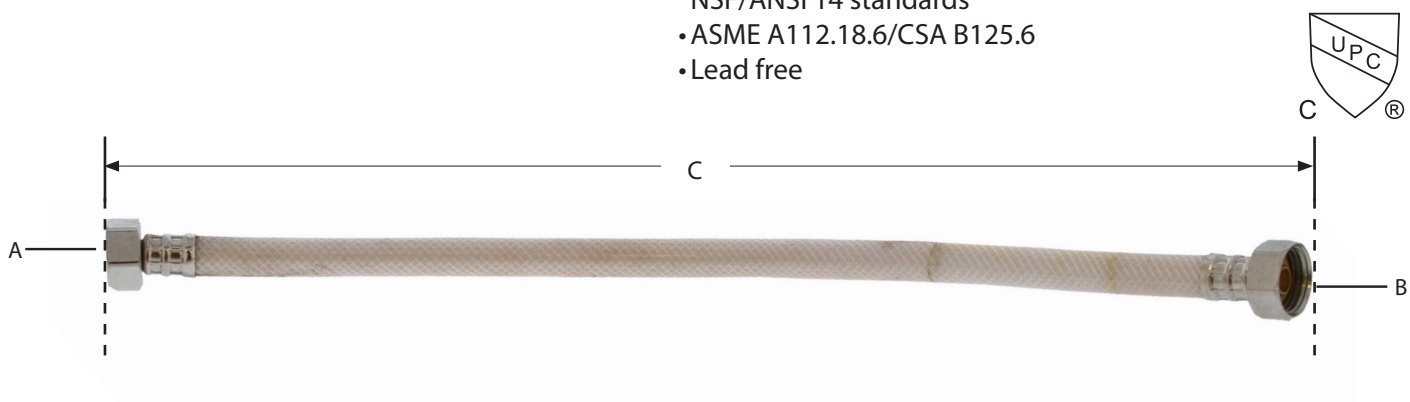

Part No.	FIP - A	FIP - B	Length - C
S04409	0.50"	0.50"	12"
S04410	0.50"	0.50"	16"
S04411	0.50"	0.50"	20"