


ANZZI®

Item:L-AZ096**

ANZZI Single-Handle Lavatory Faucet
INSTALL & OPERATION MANUAL
V2.1

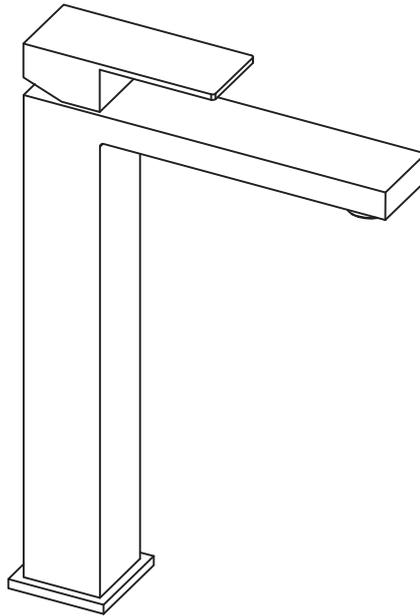

DON'T WAIT! REGISTER NOW!

Register your product within 90 days to ensure your product is recognized as an official purchase and is eligible for warranty coverage.

Mail in the completed registry card (Pg. 2) or register online at www.swcorp.com/register.



PRODUCT REGISTRATION*

IMPORTANT: YOUR WARRANTY WILL NOT BE RECOGNIZED UNLESS THIS CARD IS FULLY COMPLETED AND RETURNED OR ONLINE REGISTRATION IS COMPLETED.

To ensure that your warranty is registered and confirmed please do one of the following:

1. Register online at www.swcorp.com/register. You will be asked to fill out the same information you would in the registration card. Registering online is fast, secure and ensures we receive your information.
2. Complete, cut-out and mail the registration card below. By returning this registration card we confirm the date of purchase for your new product. This confirmation will allow us to process any warranty claims.

Mail the card to: 5701 NW 35 Avenue, Miami, FL 33142



Product Registration Card

Name..... Address

City..... State..... Zip.....

Phone Email.....

Date of Purchase

Installer's Name Phone

I have read the Owner's Manual carefully and understand and agree that any installation, operation or maintenance of the product must be done strictly in accordance with instructions and guidelines contained in the owner's manual and installation guide.

Signature..... Date.....

Have questions? Call us at 305-614-4070 or visit us at www.ANZZI.com

DESCRIPTION

- Stainless Steel construction
- Flexible supply lines suitable for 3/8" supply stop


FLOW

- Water usage is limited to these maximum flow rates as indicated by the corresponding product markings
1.2 gpm max (4.5L/min) at 60psi

CARTRIDGE

- Ceramic disk cartridge


NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 1 HOLE, $\Phi 1\text{-}5/16"$ ($\Phi 33\text{mm}$) MIN.

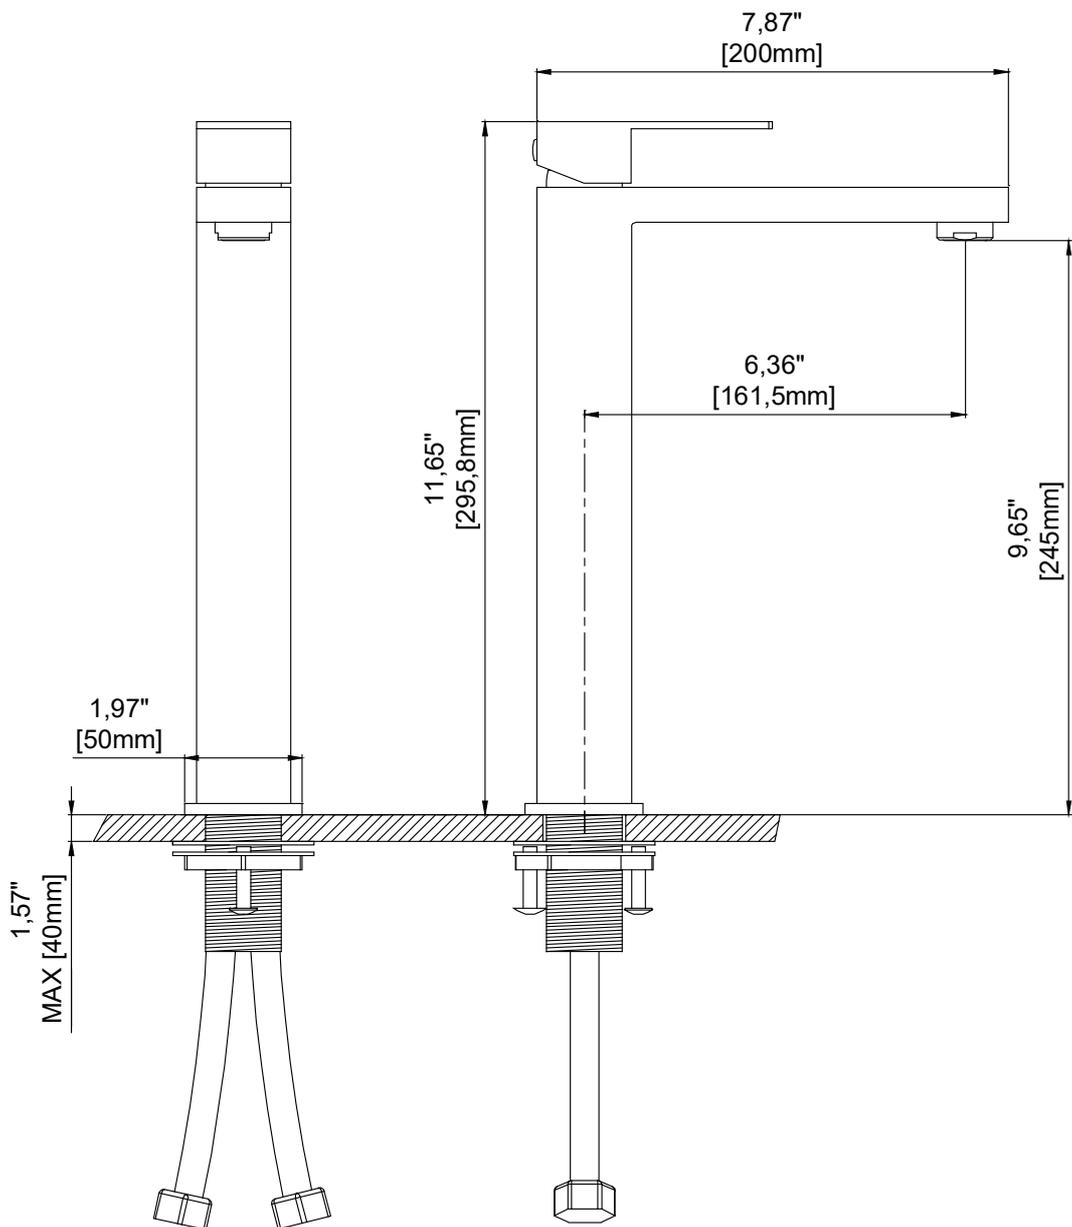


Note: Dimensions are for reference only. Detailed information is in accordance with the final product.

Single-Handle Lavatory Faucet Installation


INSTALLATION MANUAL Tools You Will Need:



Adjustable wrench



Hexagon wrench




Philips Screwdriver

Notes before installation :


1. Please check that all components are present.
2. Before installation ensure that all feed lines are clear of debris and on/off valve is present.
3. Ensure water pressure is between 20-125 PSI (includes combination of hot and cold feed lines).
4. Pictures in the manual are general in content and may not represent exactly your purchased faucet. If you are having difficulties please contact a professional plumber.
5. If you will be away from home for an extended period you should shut off the main water supply.

Maintenance


1. Use a soft cloth and vinegar to remove hard-water spots.
2. Check aerator(if present) regularly for calcium build up are when water stream is not optimum.
3. DO NOT use caustic cleaning products as the use will break down finish and will void the product warranty.
4. Acceptable cleaners include vinegar or mild non-abrasive liquid detergents.

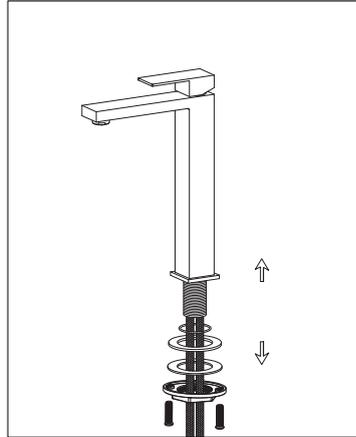


1. Remove the rubber washer, metal washer and lock nut from the faucet.

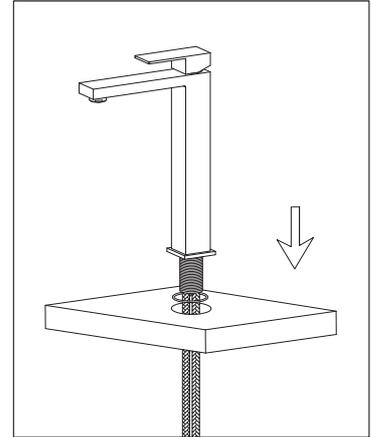


2. Install faucet with oring under the flange through center hole.

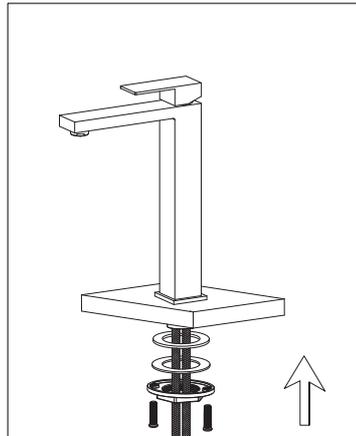


3. Re-install the rubber washer followed by the metal washer and lock nut, then hand tighten it.

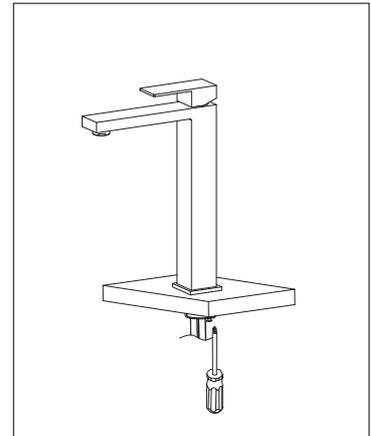

4. Hand tighten further using a screw driver to tighten lock nut screws.

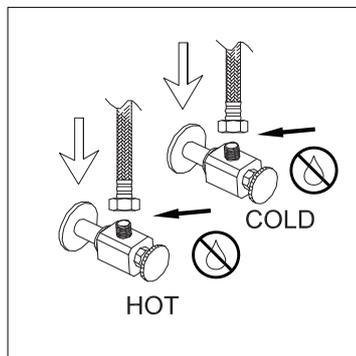

5. Connect hoses to the water supply and tighten. Check all connections at arrows for leaks. Retighten if necessary, but do not overtighten.

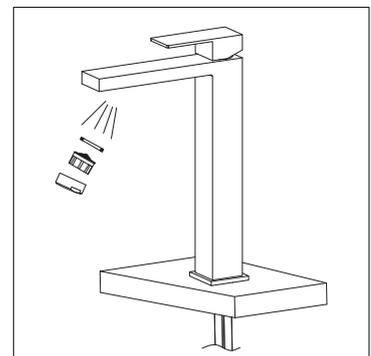

6. Remove the aerator and turn on faucet for 1-minute to flush debris from faucet and feed lines. Turn faucet off and re-install aerator.