

This document, including the design, configuration and mechanical features revealed herein are the sole, confidential and proprietary property of TRU Corporation. Reproduction or use thereof, in whole or part, is prohibited without the prior written consent of TRU Corporation.

REV.	DESCRIPTION	DATE	APPROVED
-	ORIGINAL ISSUE	07/23/10	TRC

ENGINEERING DATA

ELECTRICAL:

FREQUENCY RANGE: DC TO 50 GHz  
VSWR MAX: 1.15:1

MECHANICAL:

INTERFACE PER MIL-STD-348

MATERIAL:


HOUSING/COUPLING NUT: STAINLESS STEEL  
CONTACTS: BERYLLIUM COPPER  
SUPPORT BEAD: PEI




FINISH:

HOUSING/COUPLING NUT: PASSIVATED  
CONTACTS: GOLD PLATED

NOTES:

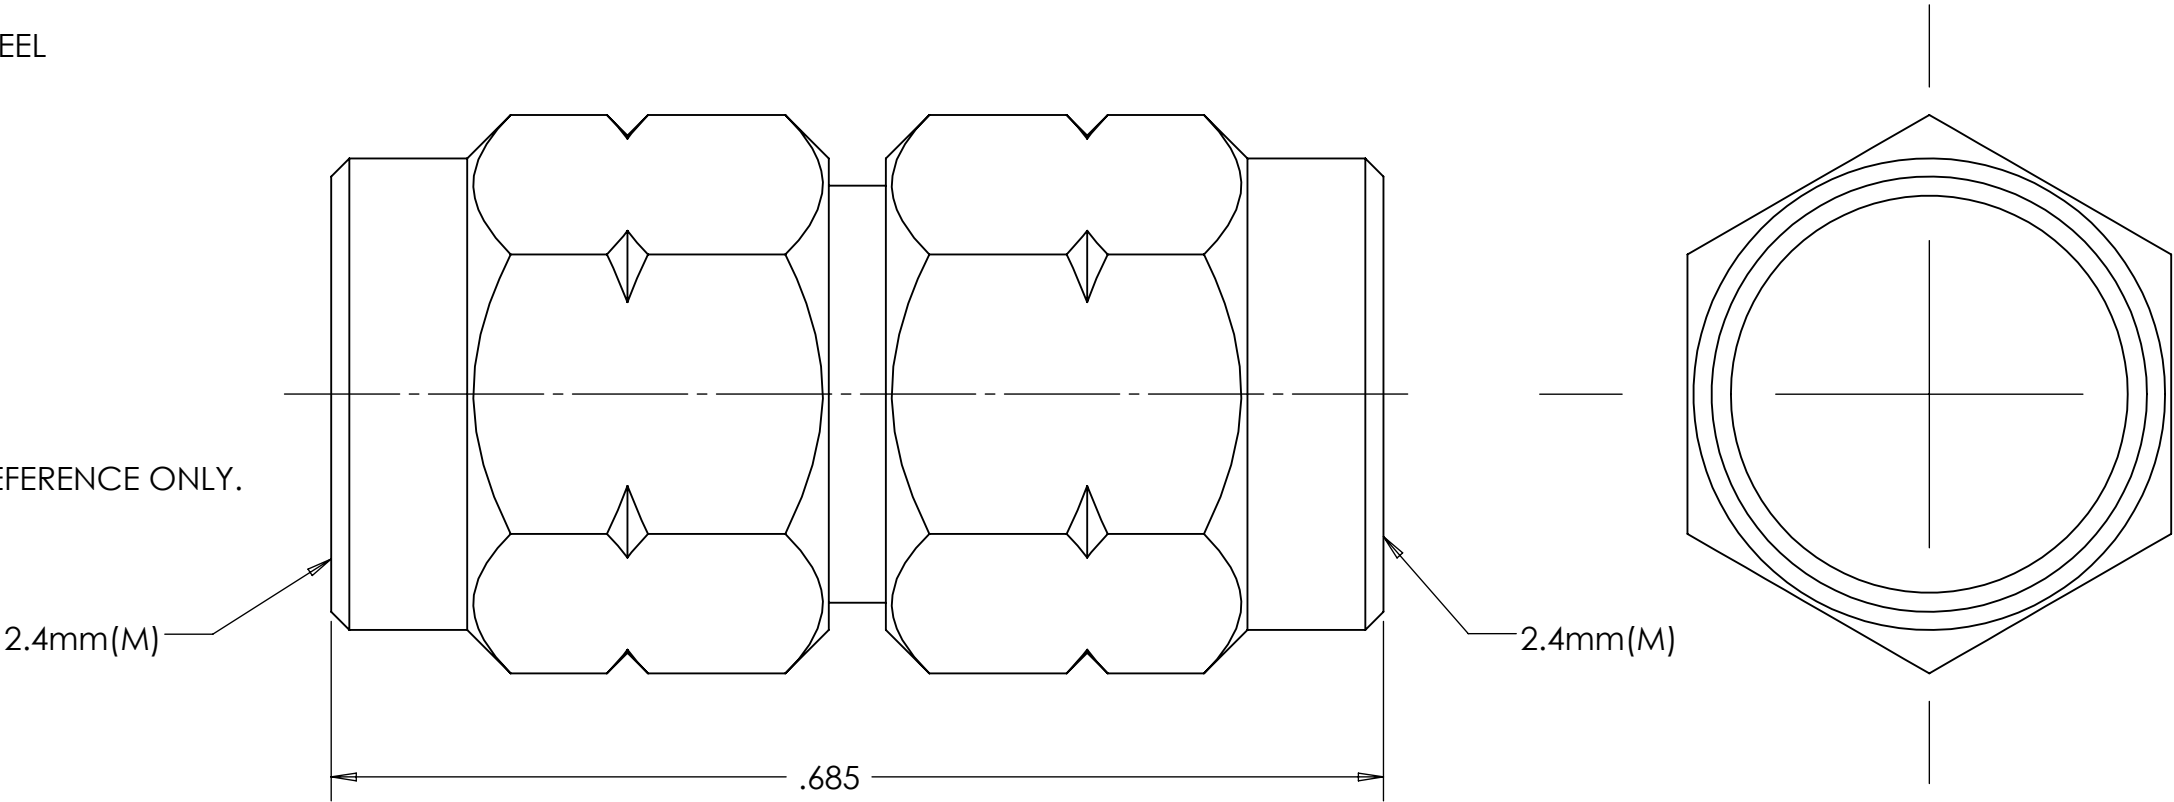1. ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.



MATERIAL		DO NOT SCALE DRAWING	DRAWN TRC	DATE 07/16/10	<div> <b>TRU CORPORATION</b> 245 LYNNFIELD STREET, PEABODY, MA 01960</div> <div>The Custom Interconnect Leader™</div>			
		UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES	ENG APPR. TRC	DATE 07/21/10				
			MFG APPR. DF	DATE 07/21/10				
			OTHER APPR. AM	DATE 07/20/10				
COMMENTS:		TOLERANCES: FRACTIONS: ± 1/64 .XX : ± .01 .XXX: ± .005 ANGLES: ± 1/2° MACHINED SURFACES:  	THIRD ANGLE PROJECTION 		TITLE:  CONNECTOR, COAXIAL 2.4mm(M) to 2.4mm(M)			
					SIZE <b>B</b>	DWG. NO.  TRU-11255		REV  -
					CAGE CODE: 92180		SCALE: 8:1	SHEET 1 OF 1
surface area: sq inch		weight: lbs						