


Carefully unpack all parts and identify them with parts list before attempting to assemble the chair.

**IMPORTANT: DO NOT TIGHTEN BOLTS AND SCREWS FULLY UNTIL YOU HAVE COMPLETED THE FINAL ASSEMBLY.**

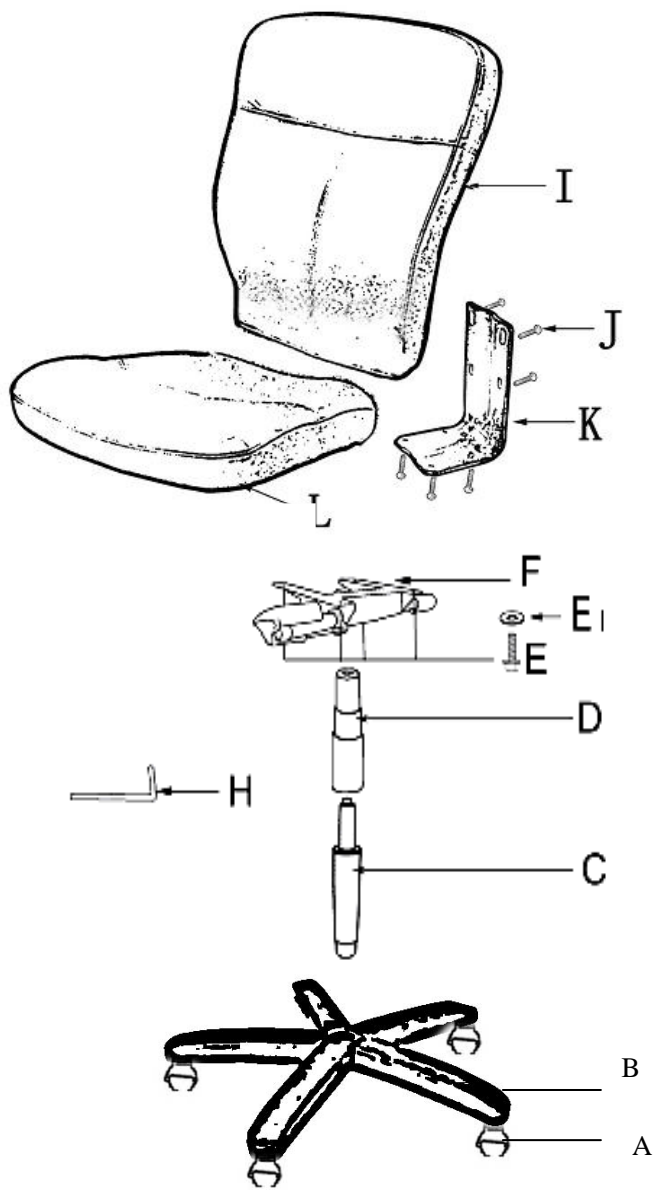

1. Put 5 CASTERS (A) into the holes of 5 STAR BASE (B).
2. Insert GAS LIFT (C) through the center hole of the 5 STAR BASE (B), and put the BELLOWS(D) onto the GAS LIFT(C).
3. Attach SEAT (L) to METAL PIECE (K) and BACK (I) .METAL PIECE (K) and BACK (I) are preassembled using SCREWS (J).
5. Attach SEAT PLATE (F) to SEAT (L) using 4 SCREWS (E) with FLAT WASHERS (E1).
6. Insert the pre-assembled seat unit onto GAS LIFT (C )to finish the final assembly.
7. Be sure that all the screws are fully tightened before using.

*Parts List*

A.	CASTERS	5
B.	5 STAR BASE	1
C.	GAS LIFT	1
D.	BELLOW	1
E.	SCREWS(5/16"X1-1/2")	4
E1.	FLAT WASHERS	4
F.	SEAT PLATE	1
H.	ALLEN KEY	1
I.	BACK	1
J.	SCREWS(1/4"X1")	4
K.	METEL PIECE	1
L.	SEAT	1