

DASH NO.	M CODE	MADE FROM
----------	--------	-----------

GSD

REVISIONS

ISSUE	CHANGES
2	ER 32200 WJM 05/14/90
3	CN 32443 A WJM 08/20/90
4	CN 33329 E JCA 08/22/91
5	CN 37150 A KH 10/02/96
6	CN 37528 A JW 01/16/98
7	CN 37640 C HN 07/14/98

127-15-*

127-15S

SCALE 4:1

APPROX SURFACE AREA

WAS: E-16078A-D

USED ON 127-15


REF: BALL DWG. NO. 300489 REV. B

RECEPTACLE, PANEL, TNC

DRAWN	KH	DATE	12/5/89
DESIGN	JT	DATE	12/6/89
APPR.	VLS	DATE	5/16/90

KINGS
ELECTRONICS CO., INC.
TUCKAHOE, NEW YORK 10707

127-15-*

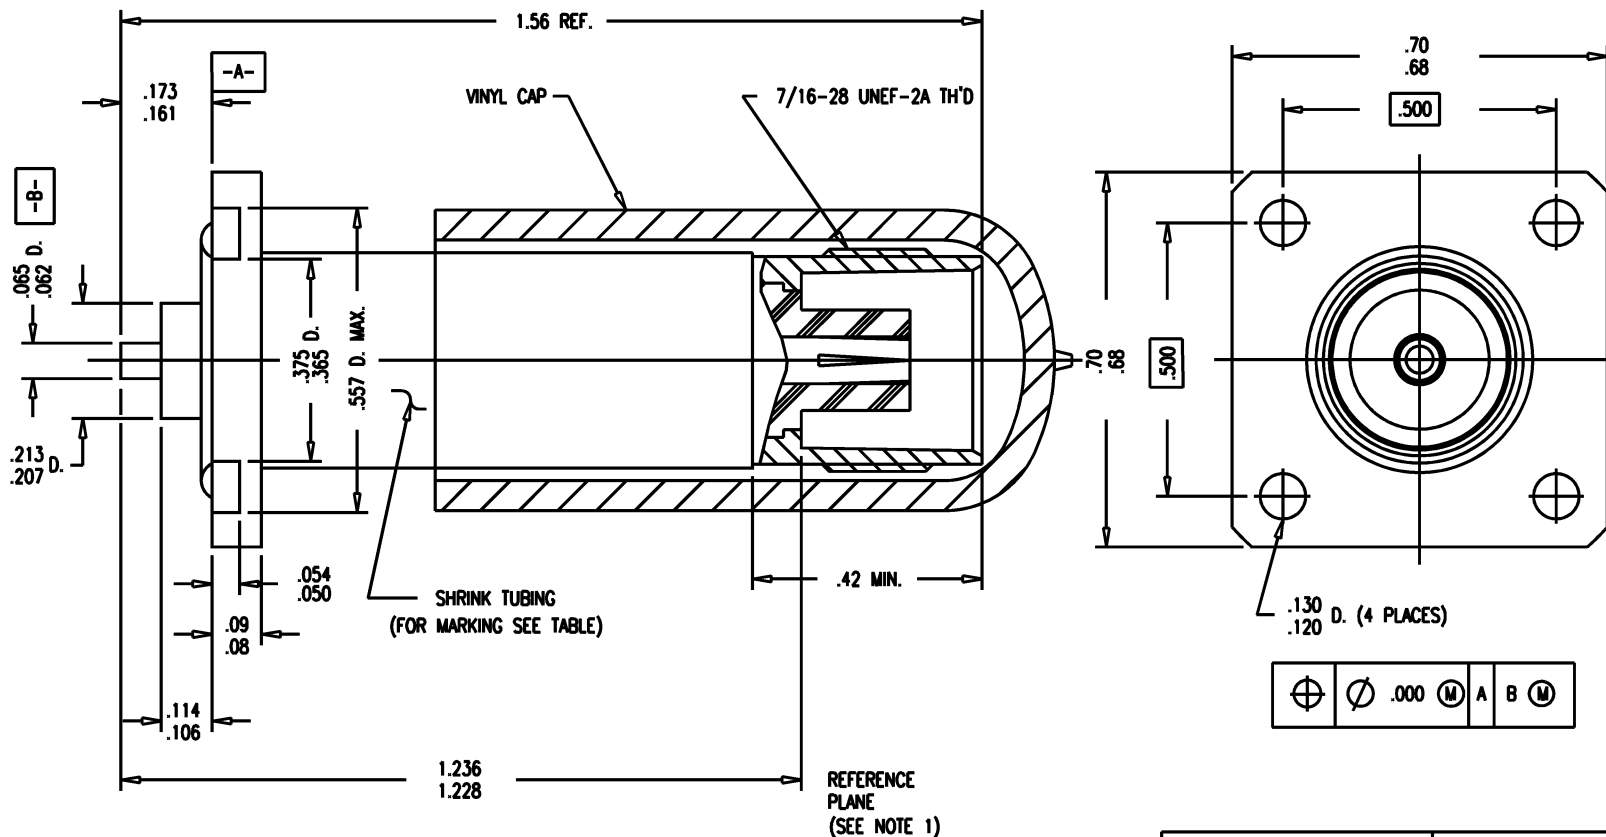

NOTES:

- INTERFACE TO BE IN ACCORDANCE WITH MIL-STD-348 FIG. 313-2.
- MATERIALS:
INSULATOR-TEFLON, ASTM-D-4894
CENTER CONTACT-BER. COP., ASTM-B-196
O-RING-SILICONE RUBBER, ZZ-R-765
SHRINK TUBING-POLYOLEFIN PER MIL-I-23053/5
BODY-BRASS, ASTM-B16
- FINISHES:
CENTER CONTACT-GOLD PLATE PER MIL-G-45204
BODY-KINGS TARNISH RESISTANT FINISH (TR-5)
- ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE-50 OHMS
FREQUENCY RANGE-DC TO 1.10 GHZ
WORKING VOLTAGE-500 VOLTS RMS
VSWR: 1.07 MAX.
- DIMENSIONING SYMBOLS IAW ANSI Y14.5M.

KINGS P/N	CODE	MARKING
127-15-1	J1	J1
127-15-2	J2	J2
127-15-3	J3	J3
127-15-4	J4	J4

GSD