


### PREPARATION

1. Record your model number for future reference.
2. **DANGER: Risk of electric shock.** To avoid electric shock, the power must be turned off at the circuit breaker or fuse box before beginning the installation procedure.
3. **DANGER: Risk of electric shock.** To avoid electric shock, the outlet box must be properly grounded.
4. **Important Information.** Inspect the product for any damages. This product is for indoor use only. Observe all local codes.
5. Your product may appear different than the one illustrated. The installation procedures remain the same.


Please see next page for a larger installation image

### TOOLS AND MATERIALS NEEDED

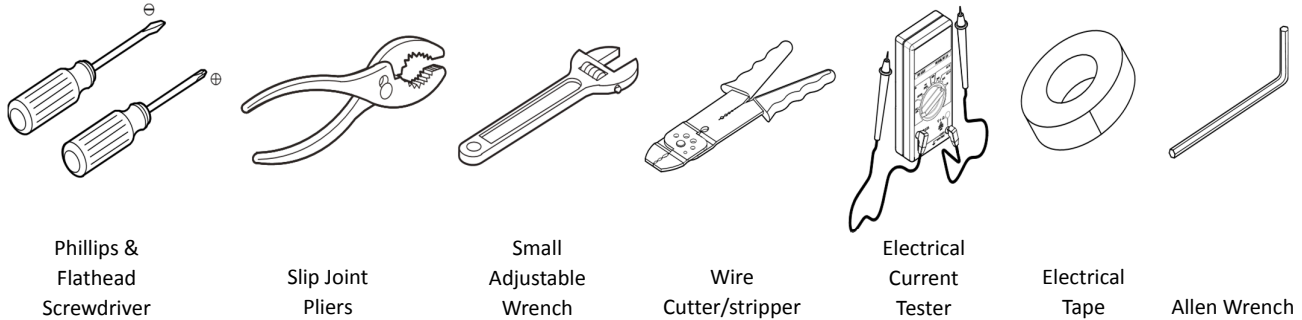

### FIXTURE INSTALLATION

1. Remove the fixture and parts bag(s) from the carton. Put them onto a clean and soft cloth to protect finish. Confirm all parts are included.
2. To adjust length of cord, loosen set screw (E) on the canopy (D) until the cord can slide. Be careful not to remove the set screws. Adjust the length of cord by pulling cord through the canopy (D) to set fixture at desired height. Then, tighten set screw (E); be careful not to pierce wiring.
3. Slide safety clip (J) down cord to touch canopy. Do not damage the cord insulation layer.
4. Cut excess cord to minimum 6" beyond canopy (D).
  - a) Trim cloth 2" from the end.
  - b) Strip insulation 5/8" from end without cutting copper wire.
  - c) Twist each copper wire individually.
5. Attach mounting plate (B) onto outlet box with screws (C). Ensure the direction of ground screw (K) as shown.
6. Adjust Nipple (M) so that it extends about 1-3/4" from mounting plate, secure it on mounting plate with hex nut (L).
7. **NOTICE:** To avoid short circuit, make sure wires are not exposed. Fasten fixture green or bare ground wire to the green or bare copper wire in outlet box with wire nut (A) or fasten onto ground screw (K) on mounting plate (B). Fasten fixture white wire to the white wire in outlet box with wire nut (A). Wrap the wire connector with electrical tape so that the tape seals the end of wire nut (A), see diagram.
8. **NOTICE:** To avoid short circuit, make sure wires are not exposed. Fasten the fixture black wire to the black wire in outlet box with wire nut (A). Wrap the wire connector with electrical tape so that the tape seals the end of wire nut (A), see diagram.
9. Tuck wires carefully inside outlet box. Push the canopy tight to the mounting plate, exposing the threads on the nipple (M) through the hole in the canopy (D). Then, secure the canopy (D) to the mounting plate (B) by threading nut (F) onto nipple (M).
10. **NOTICE:** Do not exceed recommended wattage. Install lamp(s). Rated **Max 40 W, Type B**. (Bulb(s) not included).
11. Install the small glass (G) and medium-sized glasses (H) onto glass holder, with screws (I).
12. Restore power to circuit at breaker or fuse box.

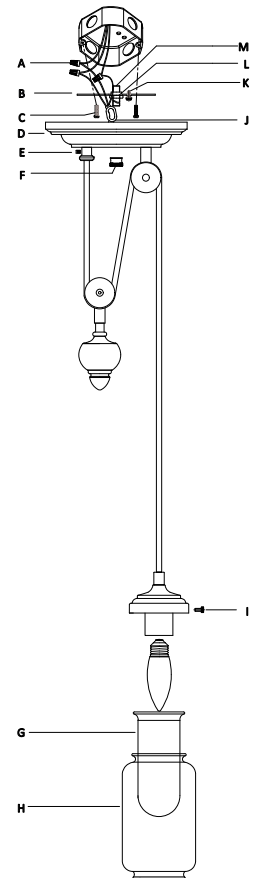

### CLEANING

Please clean fixture with a soft and dry cloth ONLY. Clean glass with a mild soap.

