



# NANLITE

## *PavoTube 15C*

### *2ft 2 Point Kit*

- 2 ft RGBW LED Tube w/ internal battery 2 light kit
- Maximum output of 1400 lumens per tube (the 2 tubes in this kit produce 365Lux @1m 5600K when combined)
- Full spectrum RGB
- Output 375 Lux of 5600K daylight-balanced light at 1 meter
- Adjustable color temperature from 6500-2700K
- High CRI/TLCI of 98/95

## Studio Quality Lighting

An amazingly versatile studio lighting fixture that featuring 0-100% dimming, a max output of 1400 lumens, adjustable color temperature from 6500-2700K as well as a full spectrum RGB and pre-programmed special lighting effects.

## Limitless Possibilities

Simply connect multiple PavoTube RGB+W Tubes together via the included sync cord to build and shape a powerful bank of lights with synchronized adjustments and effects.

## Full Creative Control


Easily achieve beautiful results without adding plastic filters or gels. The PavoTube Tubes' easy-to-use dials and buttons enable you to dial temperature from warm to cold (6500K-2700K) or hue and saturation in RGB mode.

## Power Anywhere

Perfect for use in the studio or on location, PavoTube RGB+W Tubes can run off either the included AC adapter or their internal Li-ion batteries for up to 2 hours at full brightness when no mains power is available.



|                |                           |   |
|----------------|---------------------------|---|
| Technical Data | LED Type                  | RGB+W LED Tube                                |
|                | Power Consumption         | 16W   |
|                | Power Supply              | DC15V 3A, AC 100-240V                         |
|                | Battery Compatibility     | Built in Rechargeable Li-Ion                  |
|                | Charge Time to Full       | 2-4 Hours (depending on depletion of battery) |
|                | Runtime @ 100% Brightness | 2.2 Hours of Runtime at 100% Brightness       |
|                | CRI (Ra)                  | 98  |
|                | TLCI                      | 95  |
|                | Color Temperature         | 2700K-6500K                                   |
|                | Dimming                   | 0-100%  |
|                | Control                   | Dimming, 2.4G wireless control                |
|                | Dimensions                | 2 Ft Length / 1.9 Diameter                    |
|                | Weight                    | 1.9 LBS                                       |
|                | Cooling System            | Passive                                       |
| Mount          | T12 & 1/4-20 via adaptor  |   |
| Warranty       | Limited 1-Year            |   |

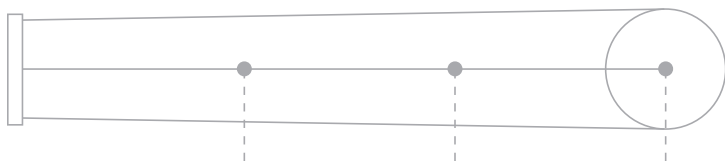

| Distance | 1M               | 2M               | 3M             |
|----------|------------------|------------------|----------------|
| 2700K    | 375 lux<br>34 fc | 99 lux<br>9 fc   | 46 lux<br>4 fc |
| 3300K    | 330 lux<br>30 fc | 103 lux<br>9 fc  | 53 lux<br>4 fc |
| 5600K    | 352 lux<br>32 fc | 105 lux<br>9 fc  | 54 lux<br>4 fc |
| 6500K    | 430 lux<br>39 fc | 117 lux<br>10 fc | 54 lux<br>4 fc |