USER'S MANUAL

UBAC50D

AMPLIFIED | 12V UNIVERSAL **BLUETOOTH®** CONTROLLER AMPLIFICADO | 12V UNIVERSAL CONTROLADOR DE BLUETOOTH®



BOSS Audio Systems

www.bossaudio.com | 805.322.8794 tech support: www.bossaudio.com/support/technical-support











USER'S MANUAL

UBAC50D

AMPLIFIED | 12V UNIVERSAL **BLUETOOTH®** CONTROLLER FEATURING BUILT-IN CLASS D AMPLIFIER

AMPLIFICADO | 12V UNIVERSAL CONTROLADOR DE **BLUETOOTH**®

AMPLIFICADOR DE CLASE D INCORPORADO





















TABLE OF CONTENTS

7	
Ш	

INTRODUCTION	1
WHAT'S IN THE BOX	2
IMPORTANT SAFETY PRECAUTIONS	3
INSTALLATION PRECAUTIONS	4
WIRING	5
MOUNTING METHODS	6
GETTING TO KNOW YOUR UBAC50D	7
BLUETOOTH OPERATION	8
BLUETOOTH RECONNECTION	10
BLUETOOTH STREAMING CONTROL	11
AUX-IN	12
TROUBLE SHOOTING	
SPECIFICATIONS	13

All trademarks are the property of their respective owners. BOSS AUDIO SYSTEM has no affiliation with these companies.

All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means, including photocopying, recording, or other electronic or mechanical methods, without the prior written permission of BOSS AUDIO INC.

Copyright © 2016 BOSS AUDIO INC

Congratulations on your new purchase of the



UBAC50D

The UBAC50D is a universal Bluetooth® audio source unit controller with integrated 2CH Class D amplifier. Designed for Android / iOS / Windows Smart devices.

The *UBAC50D* conveniently expands your existing sound system from one small package. Rear RCA outputs connect direct to your larger amplifiers for extending your system. You can easily control your favorite music streaming *APP* all whilst keeping your device safely stored away.

Other conveniences include a front 3.5mm AUX INPUT port and USB charging port for keeping your Smart Devices battery topped off.

(USB and AUX cables not included)

Please read through these instructions carefully so you will know how to operate your model properly. After you have finished reading the instructions, keep this document in a safe place for future reference.

INTRODUCTION

Bluetooth°

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks is under license. Other trademarks and trade names are those of their respective owners.

FCC COMPLIANCE STATEMENT

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause interference, and
- (2) this device must accept any interference, including interference that may cause undesired operation of this device.

This transmitter must not be co-located or operated in conjunction with any other antenna or transmitter. The Bluetooth antenna cannot be removed (or replaced) by user. This equipment complies with FCC/ IC radiation exposure limits set forth for an uncontrolled environment and meets the FCC radio frequency (RF) Exposure Guidelines and RSS-102 of the IC radio frequency (RF) Exposure rules. This equipment has very low levels of RF energy that it deemed to comply without maximum permissive exposure evaluation (MPE). But it is desirable that it should be installed and operated keeping the radiator at least 20 cm or more away from person's body (excluding extremities: hands, wrists, feet and ankles). Alteration or modifications carried out without appropriate authorization may invalidate the user's right to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Relocate or reorient the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

CAUTION!!

ADJUSTMENT OR ALTERATIONS OF THIS DEVICE MAY RESULT IN HAZARDOUS RADIATION EXPOSURE.

WHAT'S IN THE BOX

UBAC50D



SURFACE & FLUSH MOUNT BEZELS





BAR MULTI-MOUNT





0.75" ~ 1" 1.5" ~ 2.00"

HANDLEBAR & CAGE BUSHINGS









WARRANTY CARD

QUICK START GUIDE








FACEBOOK CARD

IMPORTANT SAFETY PRECAUTIONS



To avoid potential shorts in the electrical system, be sure to disconnect the (–) battery cable before installation. Use this unit with a 12-volt battery and negative grounding system only. Failure to do so may result in a fire or malfunction.

- Do not operate mobile equipment while driving a motorized vehicle safe driving and safety consideration of others should always be your highest priority.
- In the event you should notice smoke, strange noises or odor from this product, or any other abnormal signs, immediately turn off the power and consult your dealer or the nearest authorized BOSS AUDIO Service Center. Using this product in this condition may result in permanent damage to the system.
- Refer any repairs to a qualified BOSS AUDIO SYSTEMS Service Center.
- Set your volume control at a low setting, then slowly increase the sound until you can hear it comfortably without distortion, or ear discomfort.

BE SURE TO OBSERVE THE FOLLOWING GUIDELINES:

- Do not turn up the volume so high that you can't hear what's around you.
- Use caution or temporarily discontinue use in potentially hazardous situations.
- Abide all Federal, State, and Local laws.





INSTALLATION PRECAUTIONS

WARNING - Always consult a professional installer

- Do not attempt to install or service this product by yourself. Installation or servicing of this product by persons without professional training and experience in electronic equipment and motorized vehicle accessories may be dangerous and could expose you to the risk of electric shock, injury or other hazards.
- Ensure the *UBAC50D* is not attached to, or behind metal.
- Never install this product in a heated location, or under water.
- Do not install the *UBAC50D* next to the vehicles electronics.
- The *UBAC50D* should be hard wired directly to an accessory switch or to the battery through an optional switched relay.
- Always use the included fuse and fuse holder, always replace with a 3 Amp fuse.
- The UBAC50D has a weather resistant design, it should not be under any circumstances submerged in, or under water.
- Use only the supplied installation parts provided with the UBAC50D.
- Wash with a mild detergent and lukewarm water using a clean sponge or a soft cloth.
- Rinse well with clean water.

"DO NOT'S" - Very Important

- DON'T clean in hot sun or on very hot days.
- DON'T use abrasive or highly alkaline cleaners on the main body.
- DON'T scrape the main body with razor blades, or other sharp instruments.
- DON'T ever use, gasoline, acetone or carbon tetrachloride.
- DON'T ever use a pressure washer.






QUICK START GUIDE

5

3055° AUDIO SYSTEMS

WIRING

TECH SUPPORT: 805.322.8794

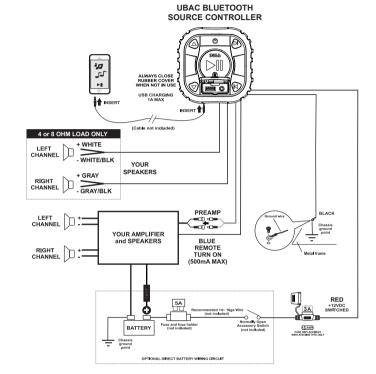

RED ------ ACC SWITCHED (+12VDC)
BLACK ------ GROUND
BLUE ------AMP REMOTE OUTPUT (+12VDC)
RED RCA ------ RIGHT AUDIO OUTPUT
WHITE RCA ----- LEFT AUDIO OUTPUT
GRAY ----- RIGHT SPEAKER OUTPUT


■ The ground cable length should not exceed 18 inches.

MOUNTING METHODS

- HANDLEBAR
- FLUSH MOUNT
- SURFACE MOUNT



HANDLEBAR / CAGE MOUNT



FLUSH MOUNT



- 1) Always check mounting depth before cutting
- 2) Use the flush bezel as template
- 3) Cutout hole exactly
- 4) Insert flush mount bezel, push side tabs outwards
- 5) Use optional silicon glue to give extra hold
- 6) Insert UBAC50D

SURFACE MOUNT



- 1) Check mounting depth before drilling
- 2) Use the flush bezel as template
- 3) Drill or cut wire hole exactly
- 4) Insert rubber trim around flush bezel, screw in place
- 5) Insert UBAC50D

TOOLS NEEDED:

OPTIONAL TOOLS NEEDED:

- 4mm Allen Wrench | Hand saw or Jigsaw
- Wire Crimpers






GUIDE

QUICK START

EN EN

QUICK START GUIDE

GETTING TO KNOW YOUR UBAC50D

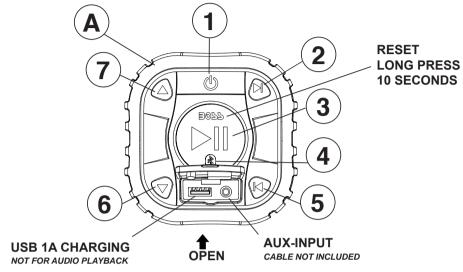


ALWAYS CLOSE WHEN NOT IN USE **NEVER USE USB or AUX WHILE IN** MUD or WATER

- **UBAC50D MFC MULTIFUNCTION CONTROLLER**
- POWER ON Press and hold for 3 seconds
- **NEXT TRACK Press and hold for Fast Forward**
- PLAY/PAUSE
- **BLUETOOTH PAIRING LED BLUE COLOR**
- PREVIOUS TRACK Press and hold for Fast Rewind
- **(6**) **VOL DOWN**
- **VOL UP**





BLUETOOTH OPERATION

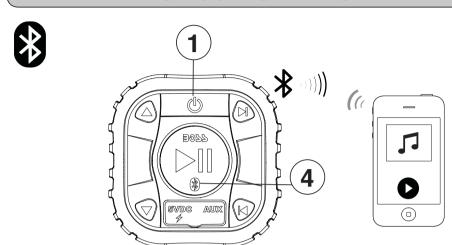

PAIRING & DISCOVERING A NEW BLUETOOTH CONNECTION

- 1) Power on the *UBAC50D* by long pressing 1 POWER button for 3 seconds
- 2) Long press the *BLUETOOTH* 4 button, the *BLUE LED* will start to rapidly flash, signalling that the UBAC50D is now ready for BLUETOOTH pairing.

NOTE: You have 2 minutes before you must restart this procedure over again.

3) Now that the *UBAC50D* is in pairing mode:

ANDROID users:

- a. Go into the Settings Menu of your ANDROID device
- b. Enter the BLUETOOTH Menu
- c. Turn ON BLUETOOTH and press SCAN
- d. "BOSS UBAC50D" will now be displayed under **AVAILABLE DEVICES**






BLUETOOTH OPERATION (CON'T)

QUICK START GUIDE





iOS users:

- a. Go into the Settings Menu of your iOS device
- b. Enter the BLUETOOTH Menu
- c. Turn ON BLUETOOTH
- d. Tap on "BOSS UBAC50D"
- e. If prompted, enter passcode: "0000"
- 4) If BOSS AUDIO UBAC50D is not seen, repeat the above steps to refresh the "Device List"
- 5) An audible confirmation TONE will be heard and the **BLUETOOTH LED** will illuminate solid when the connection is successful, you are now ready to stream music from your favorite media player APP to the UBAC50D




To avoid battery exhaustion, be sure to occasionally run the vehicles engine while using this product.





BLUETOOTH RECONNECTION



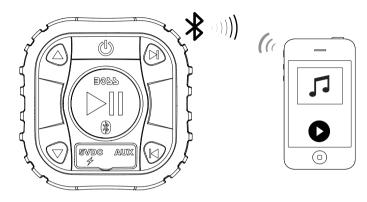

ONCE THE DEVICE IS BACK IN RANGE, IT SHOULD ATTEMPT TO AUTOMATICALLY RECONNECT

- 1) Power on the UBAC50D and your devices BLUETOOTH
- 2) The BLUETOOTH LED will flash slowly as it is looking for your previously paired device
- 3) The UBAC50D should now try to automatically reconnect to your last paired device
- 4) If your device was previously paired with the UBAC50D, but it wasn't the last paired device:

See page 8 for PAIRING & DISCOVERING A NEW BLUETOOTH **CONNECTION**


NOTE: If the device is out of range from the UBAC50D, it will disconnect automatically.







START GUIDE



STREAMING MUSIC CONTROL

MULTIFUNCTION CONTROLLER BLUETOOTH OPERATION

- 1) Press the (3) PLAY/PAUSE once to start playing music or press the PLAY button from your devices touch screen
- 2) To skip songs or advance, press the 2 NEXT TRACK button
- 3) To select the previous song, press the 5 PREVIOUS TRACK button

VOLUME CONTROL

- 4) To raise the volume, press the 7 VOL UP button
- 5) To lower the volume, press the 6 *VOL DOWN* button
- 6) To MUTE the volume, press the 3 PLAY/PAUSE button




Before stowing: Make sure your devices MEDIA volume is set at 100% level.





AUX-INPUT

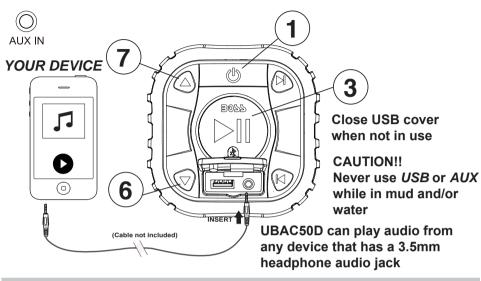

MULTIFUNCTION CONTROLLER AUX-IN OPERATION

- 1) Power on the UBAC50D by pressing and holding down the
- 1) POWER button for 3 seconds
- 2) Disconnect any paired Bluetooth device by turning off **BLUETOOTH** in your devices **SETTINGS MENU**
- 3) Under the protective door, connect your 3.5mm AUX-IN cable to your devices headphone jack
- 4) Route the AUX-IN wire back to UBAC50D, secure your device in a safe location

VOLUME CONTROL

- 5) To raise the volume, press the 7 *VOL UP* button
- 6) To lower the volume, press the 6 VOL DOWN button
- 7) To MUTE the volume, press the (5) PLAY/PAUSE button



Tips: Before stowing: Make sure your devices HEADPHONE volume is set at 100% level.



Ш

TROUBLE SHOOTING

TECH SUPPORT: 805.322.8794

<u>SYMPTOM</u>	SOLUTION
No sound	Unit or Device is MUTED
No sound	Speaker is shorted
Audio is distorted	Bluetooth is out of range
No power indicator	Fuse is blown

SPECIFICATIONS

Powersource:14.4VDC(10.8V~16Vallowable)
Grounding System: Negative type
Power Output:150W
Preamp Output:2V RMS
Preamp Impedance: 600 Ω
Frequency Response: 20-22kHz
Speaker Impedance: 4 or 8 Ω
Maximum current: 3A
Bluetooth: 4.1
Class:2
Range: 33ft
Profiles: A2DP / GATT
USB output:5VDC@1A
Dimensions: HxDxW4.05"x1.65"x4.05"/200mmx45mmx200mm
Unit weight: 0.25lbs / 0.114kg
Storage temperature:
Operation temperature: 32°F to 110°F / 0°C to 45°C
Replace fuse with rated 3A ATM type only

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE



NOTES



