

Project Name:

Item #: _____ Qty: _____

Model:

SELF-CONTAINED INDOOR ICE MACHINES

MODEL:

MIM50

MIM50V





MIM50V

ELECTRIC -

115V / 60Hz / 1Ph (230V / 50-60Hz / 1Ph is available as an option) 6' (2m) NEMA 5-15P cord set included



3RD PARTY APPROVALS -









DOE 2018 Compliant Meets Energy Star Guidelines Zero Ozone Depletion Potential

Certified to ANSI NSF 12 Certified to ANSI UL 563

MAXX ICE WARRANTY (USA / CANADA) -

Contact Maxx Ice for warranty statement at TechnicalServices@TheLegacyCompanies.com or 877.368.2797 The Maxx Ice MIM50 series of indoor ice machines produce up to 60 pounds of ice per day (under ideal conditions). These stylish, durable and easy to install models are perfect for any freestanding or built-in application.

FEATURES AND CONSTRUCTION ———

Location:

- Stainless steel / black painted steel (MIM50) or black painted steel (MIM50V) exterior
- Air-cooled compressor
- Solid state controls
- Built-in self cleaning mode
- Automatic overflow prevention
- 25 lb storage bin
- Field reversible door
- Adjustable durable feet
- Includes ice scoop & tubing for supply and drain lines

DAILY ICE PRODUCTION —

Air Temp 70°F (21°C) / Water Temp 50°F (10°C)

MIM50	60 lbs	s (27.2	(g)
MIM50V	50 lbs	s (22.7	(g)

Air Temp 90°F (32°C) / Water Temp 70°F (21°C)

MIM50	50	lbs	(22.7	kg)
MIM50V	50	lbs	(22.7	kg)


ICE BIN STORAGE CAPACITY ------

MIM50	25	lbs	(11	kg)
MIM50V	25	lbs	(11	kg)

OPERATING REQUIREMENTS

Ambient Air Temperature Range	50° to 100°F (10° to 38°C)					
Water Temperature Range						
Water Usage per 100 lbs of ice	13.8 Gallons (52.2L)					
Water Supply Line Connection 1/4" O.D. Compression						
Water Pressure Range:						
Min PSI 15	Max PSI75*					
Min Bar 1.0	Max Bar5.5					
*Above 75 PSI requires a regulator						
Energy Consumption per 100 lbs of ice:						
MIM50	10.1 kWh/100 lbs					
MIM50V	10.1 kWh/100 lbs					



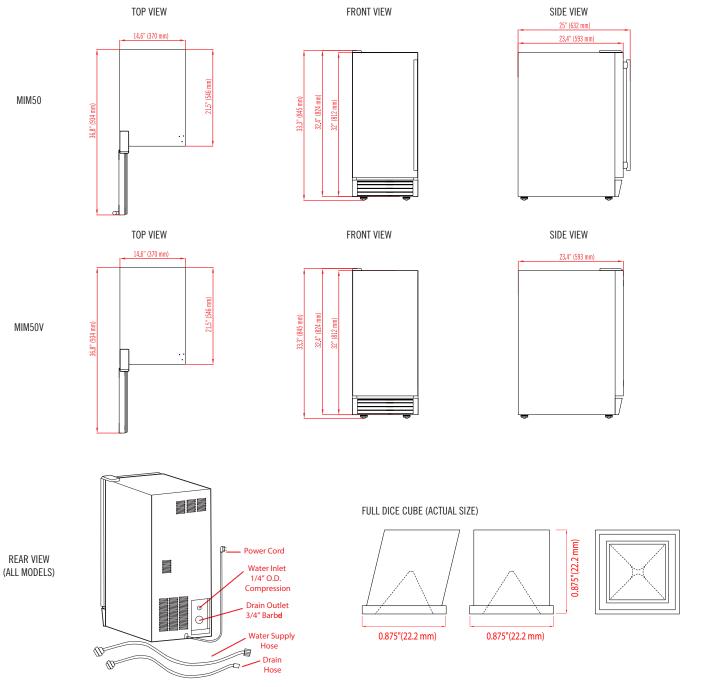

MODEL	EXTERNAL Dimensions	DAILY ICE PRODUCTION (70°F Air / 50°F Water)	ICE BIN STORAGE Capacity	NET WEIGHT / Shipping weight	AMP DRAW (Making / Harvesting)	REFRIGERANT AND CHARGE SIZE	ELECTRICAL
MIM50	14.6" x 25" x 33.3" (370 x 632 x 845 mm)	60 lbs (27.2 kg)	25 lbs (11 kg)	84 lbs (38 kg) 93 lbs (42 kg)	3A / 3.6A	R-134a 3.88oz (110g)	115V / 60Hz / 1Ph
MIM50V	14.6" x 23.4" x 33.3" (370 x 593 x 845 mm)	50 lbs (22 / kg)	25 lbs (11 kg)	84 lbs (38 kg) 93 lbs (42 kg)	3A / 4A	R-134a 3.88oz (110g)	115V / 60Hz / 1Ph

INSTALLATION

- A clearance of 2" from the wall is recommended to promote adequate cooling air circulation
- A gravity drain line is required to install this ice machine
- For optimal performance, the use of a water filter is recommended

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this document are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.