


TANE ALARM PRODUCTS



Installation instructions for TANE-3/8 ASH 3/8" Dia. Adjustable-Screw-Head Reed Switch

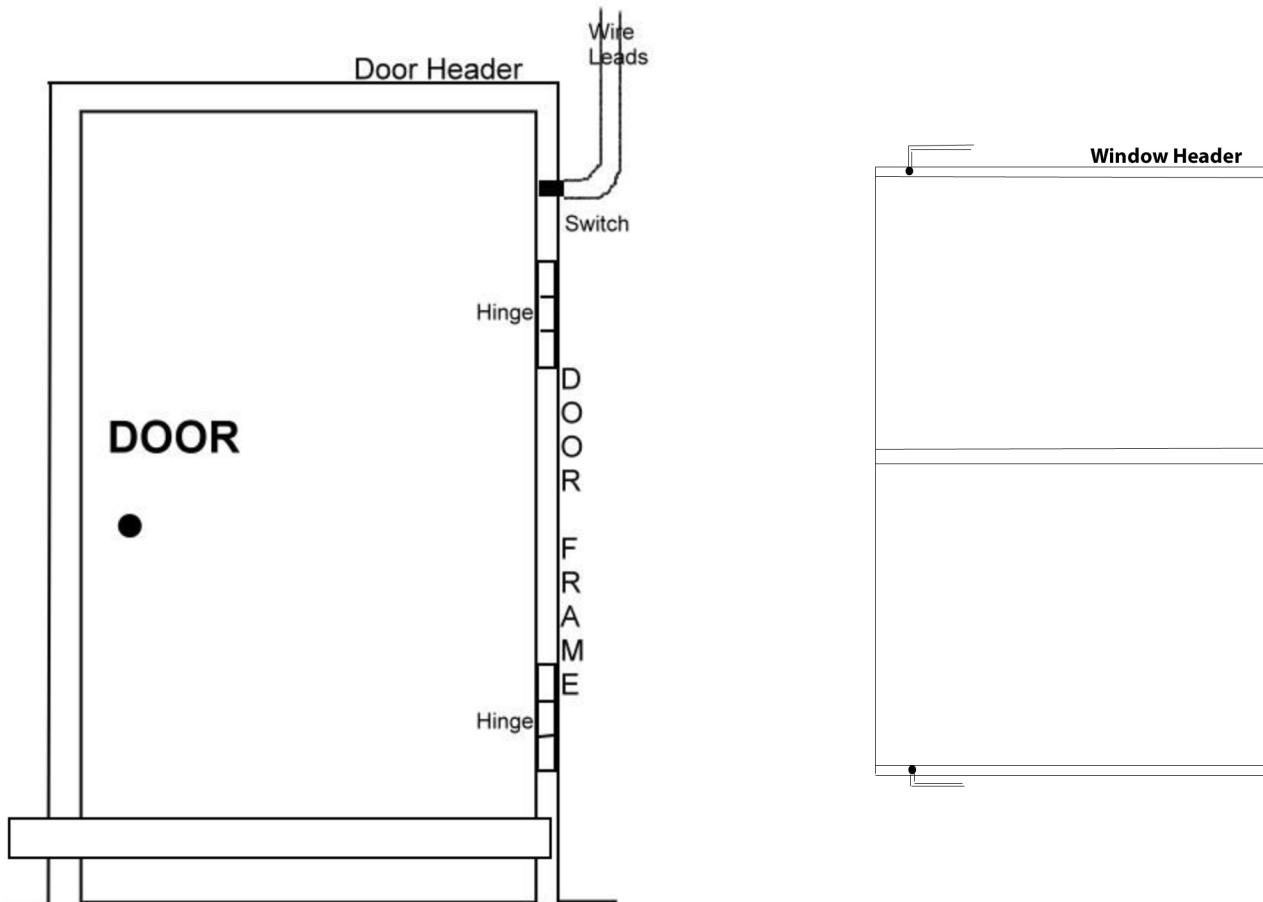

Drill 3/8" hole ON HINGE SIDE of door frame or hinged window to mount switch*
For double hung windows drill 3/8" hole in top or bottom of window channel to mount switch*
Splice wire leads from switch into alarm circuit
*Closing door or window compresses adjustable screw into contact shell - closing loop and deactivating alarm - When door or window is opened the adjustable screw extends from shell - opening loop and activating alarm

WWW.TANEALARM.COM

906 Jericho Turnpike
New Hyde Park, NY 11040

Tel: 516-328-3351 800-852-5050
Fax: 516-326-9125 Email: info@tanealarm.com