

SPEAKMAN® SM-3480-ADA

Versatile™ Pressure Balance Handicap Shower Combination

FEATURES:

- Versatile shower system includes Sentinel Mark II® concealed anti-scald balanced pressure valve with integral volume control and integral stops and hand held spray combination.
- Chrome plated brass wall plate with metal index.
- Chrome plated brass lever handle.
- Independent center sleeve allows up to 1 in. of rough-in variation. Adjustable temperature limit stop. Brass body.
- Pressure balancing and ceramic temperature regulating cartridge with built-in check valves.
- Can be installed back-to-back. Roughing-in template.
- Four port valve with ½ in. female copper sweat inlets and shower outlet (½ in. female NPT tub outlet).
- Swivel arm holder.
- S-2500 shower arm and wall flange.
- 60 in. metal hose, chrome finish. In-line vacuum breaker.
- 24 in. combination slide bar and grab bar, stainless steel and chrome, with mounting screws.
- VS-100-PC handshower with flow control device reduces flow to 2.5 gpm (9.46 L/min)
- Furnished with ½ pipe plug.



FINISH:



PC



COMPLIANCE:

- Meets ASSE 1016 & ASME 112.18.1/CSA B125.1 standards (SM-3400 valve)

OPTION:


- Contractor Packs Available

WARRANTY:

- 5 year limited

NOTE: 1. All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice. 2. Unless otherwise specified all inlets and outlets are 1/2" female copper sweat. 3. The location of the slide bar is optional, but restricted by the 69" hose length running from the shower arm bracket connection to hand shower and note #4. 4. See ICC/ANSI A117.1 standard and/or ADA accessibility guidelines for building and facilities (ADAAG) for installation locations and required dimensions based on your specific shower configuration.

DIMENSIONS:

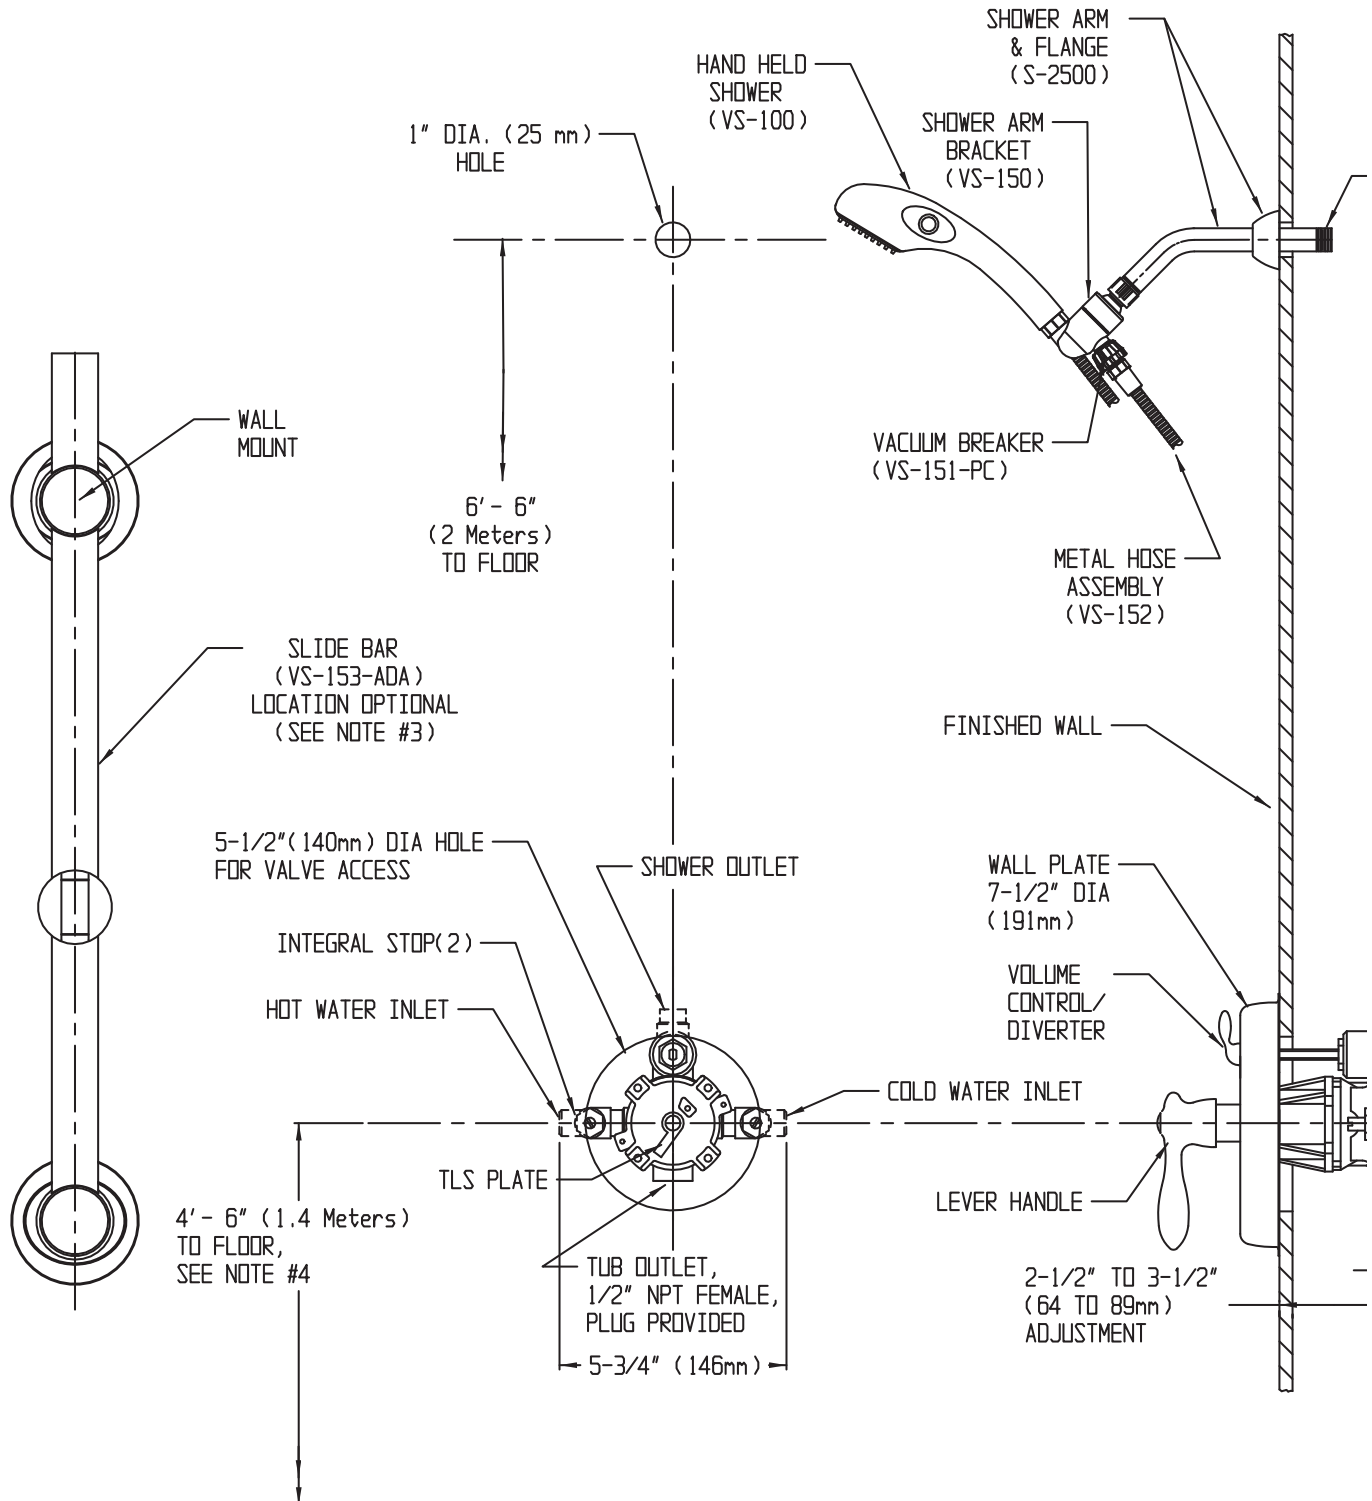

SPEAKMAN® SM-3490-ADA

Versatile™ Pressure Balance Handicap Shower/Tub Combination

FEATURES:

- Versatile shower system includes Sentinel Mark II® concealed anti-scald balanced pressure valve with integral diverter and integral stops and hand held spray combination.
- Chrome plated brass wall plate with metal index.
- Chrome plated brass lever handle. Independent center sleeve allows up to 1 in. of rough-in variation.
- Adjustable temperature limit stop. Brass body.
- Pressure balancing and ceramic temperature regulating cartridge with built-in check valves.
- Can be installed back-to-back. Roughing-in template.
- Four port valve with 1/2 in. female copper sweat inlets and shower outlet (1/2 in. female NPT tub outlet).
- Swivel arm holder.
- S-2500 shower arm and wall flange.
- S-1554 tub spout. 60 in. metal hose, chrome finish.
- In-line vacuum breaker.
- 24 in. combination slide bar and grab bar, stainless steel and chrome, with mounting screws.
- VS-100-PC handshower with flow control device reduces flow to 2.5 gpm (9.46 L/min)



FINISH:



PC



COMPLIANCE:

- Meets ASSE 1016 & ASME 112.18.1/CSA B125.1 standards (SM-3400 valve)

OPTION:

- Contractor Packs Available

WARRANTY:

- 5 year limited

NOTE: 1. All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice. 2. Unless otherwise specified all inlets and outlets are 1/2" female copper sweat. 3. The location of the slide bar is optional, but restricted by the 69" hose length running from the shower arm bracket connection to hand shower and note #4. 4. See ICC/ANSI A117.1 standard and/or ADA accessibility guidelines for building and facilities (ADAAG) for installation locations and required dimensions based on your specific shower configuration.

DIMENSIONS:

