

SPEAKMAN COMPANY

SE-912-T Installation, Maintenance & Operation Instructions

DESCRIPTION

Stay-open ball valve for vertical and horizontal installation.

SPECIFICATIONS

VALVE: 1-1/2" NPT Female Brass. Stay-Open Ball Valve.
ACTIVATOR: Stainless Steel Triangular Pull Handle.
INLET: 1-1/2" NPT Female.
OUTLET: 1-1/2" NPT Female.
SHIPPING WEIGHT: 6 lb.

OPTIONS

◇ AL1 (Air Horn Alarm)
◇ AL2 (Electrical Alarm)
◇ AL3 (Electrical Alarm)
◇ AL2-C1D2 (Electrical Alarm / Haz. Area)
◇ AL3-C1D2 (Electrical Alarm / Haz. Area)
◇ FLW (Flow Switch)

INSTALLATION

Assemble valve to a horizontal or vertical water supply that has an uninterrupted source of potable water. Use pipe sealant on all joints. Failure to use potable water can result in emergency units producing impure or contaminated water causing possible further injury.

OPERATION

This shower is activated by pulling downward on the lever handle. The valve will continue to discharge water until the handle is manually pushed up to the off position.

TESTING PROGRAM

The American National Standards Institute (ANSI) states that all safety emergency equipment shall be activated on a weekly basis to flush the line and verify proper operation. Speakman Company furnishes a testing record tag (91-0635) with each unit. On this tag the date of inspection and the inspectors initials should be noted.


MAINTENANCE

Should you need parts to repair this unit, please reference the parts list below for correct part numbers. Before any maintenance is done **be sure to shut the water supply off.**

WARNING: Use only genuine Speakman parts when repairing or replacing components. To order parts call 1-800-537-2107.

SE-912-T REPLACEMENT/REPAIR PARTS

<u>ITEM</u>	<u>PART/GROUP #</u>	<u>DESCRIPTION</u>
1	20-0895	1-1/2" Bronze Ball Valve W/ Square Stem
2	04-0494	1-1/2" Ball Valve Stop Plate
3	04-0362-RCP	Cast Brass Handle
4	01-0788	Nut For 1-1/2" Ball Valve

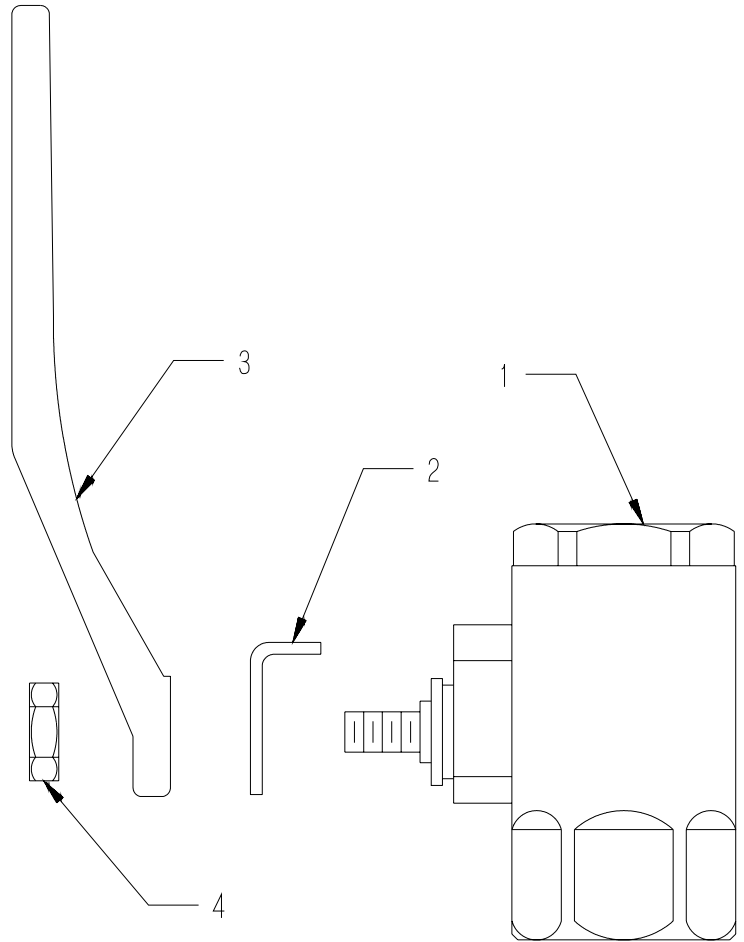


FLOW DATA

VALVE:

FLOW PRESSURE PSI (BAR)	5 (.34)	10 (.69)	15 (1.03)	20 (1.38)	25 (1.72)
FLOW RATE GPM (LPM)	38 (144)	62 (235)	74 (280)	86 (326)	97 (367)

NOTE: This unit should be connected to an uninterrupted source of potable water, with a minimum flowing pressure of 20 PSI and a maximum static pressure of 125 PSI.



SPEAKMAN COMPANY
 The Quality leader Since 1869
 P.O. Box 191, Wilmington, DE 19899-0191 USA
 1-800-537-2107, Fax: 1-800-977-2747

Note: All units meet existing ANSI Z358.1 1998 Standards and OSHA Rules. Product improvements may cause specification and dimensional changes without notice.