

Ox Box™

Outlet Box

Patent #7,360,553 & #7,735,511

- **Strong:** Over the stud application offers the industry's strongest installation
- **Fast:** Installation times are cut in half
- **Flexible:** Separate boxes offer endless configuration options
- **Durable:** ABS material stands up to job site abuse
- **Approvals:**
 - Standard packaged Ox Box™ kits are UPC listed.
 - Fire-Rated Ox Box kits are Warnock Hersey Certified.
 - Valves comply with ASME A112.18.1









Build Item Numbers

- Items not listed within this catalog can be custom built with a minimum order of 30 units

696	-	2	3	1	3	X	F		
Series	A	B	C	D	E	F	G	H	

- | | |
|---|--|
| <p>A Special Standards</p> <ul style="list-style-type: none"> - Standard product R Fire-rated package with intumescent pads and fire-rated frame -G Supplied valves are no lead alloy 693 with low zinc RG Supplied valves are no lead alloy 693 with low zinc and packaged with intumescent pad and fire-rated frame <p>B Supply Box Options</p> <ul style="list-style-type: none"> 1 Single-hole Ox Box 2 Double-hole Ox Box <p>C Drain Box Options</p> <ul style="list-style-type: none"> 0 No drain box included 3 Drain box included 4 Supply box with drain <p>D Valve and Arrester Options</p> <ul style="list-style-type: none"> 0 No water hammer arresters on valves 1 Water hammer arresters on valves 2 Accessible, integral, secondary stop on valves | <p>E Outlet Options</p> <ul style="list-style-type: none"> 0 1/4" compression connection 1 3/8" compression connection 3 3/4" male hose thread connection <p>F Inlet Options</p> <ul style="list-style-type: none"> A 1/2" F2080 PEX C 1/2" male CPVC M 1/2" female sweat V 1/2" Viega® PEX Press® W 1/2" F1960 PEX X 1/2" F1807 PEX <p>G Frame Options</p> <ul style="list-style-type: none"> F Frames included R Rough-in package, frames sold separately <p>H Extra Options</p> <ul style="list-style-type: none"> — None 26 Includes 26" galvanized support bracket S Includes 72"-long, 1/4" stainless steel hose PK4 Retail box |
|---|--|

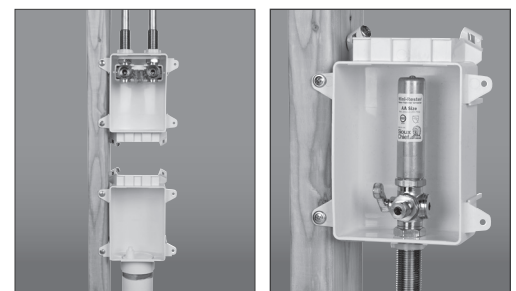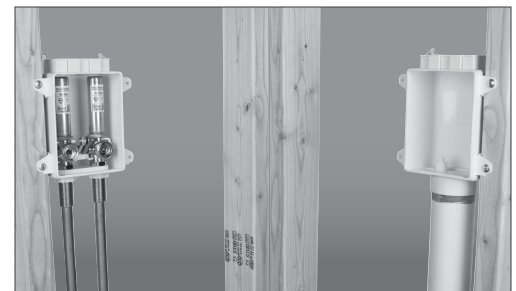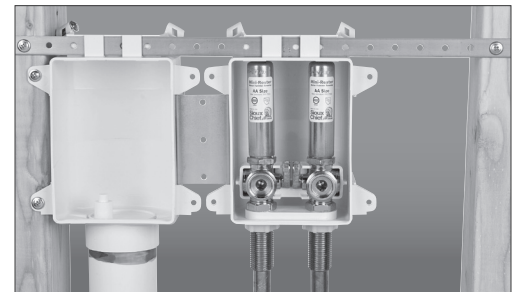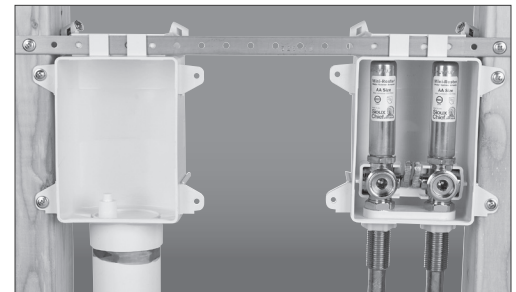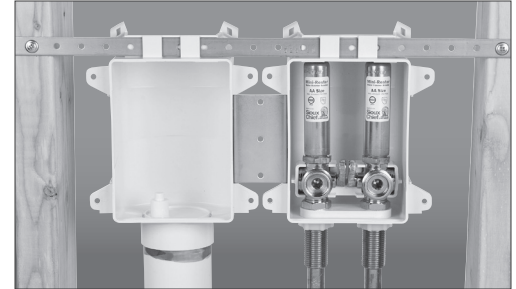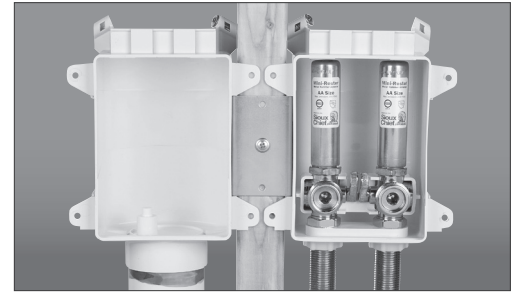



SUPPLY

DRAINAGE

SUPPORT


APPENDIX

Standard Pack

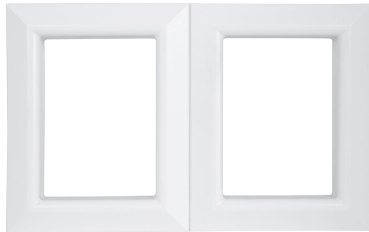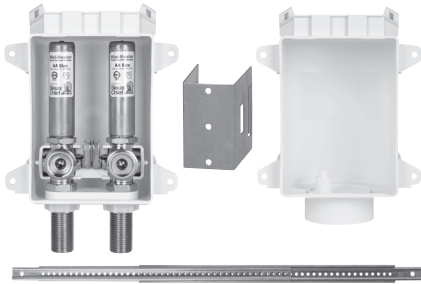

696-2313MF

Rough-in Pack

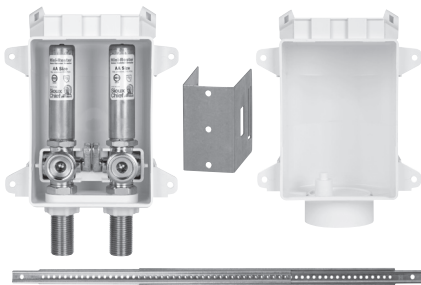

Order frames 696-2313MR separately.

Display Box



696-2313MFPK4

Ox Box™

Washing Machine Outlet Box with Mini-Rester™ Water Hammer Arresters

Patent #7,360,553 & #7,735,511

- Boxes mount securely to stud or over studs
- Separates supply and drainage systems into two stud bays
- Separate boxes offer flexible layout
- Durable ABS stands up to job site abuse
- Drain knockout is easy to remove with pliers
- With two Mini-Rester water hammer arresters
- Debris covers included to protect boxes from drywall mud and paint
- High-quality quarter-turn ball valves
- 3/4" male hose-thread outlet connections



The debris cover protects valves from drywall mud and paint during construction.

Related Products
Frames for Rough-in Packs

p 254

Item No	Shank Connection	NO LEAD	Pkg	Min Qty	Case Qty
STANDARD PACK					
696-2313MF	1/2" female sweat		B*	10	10
696-2313CF	1/2" CPVC male		B*	10	10
696-2313XF	1/2" PEX F1807		B*	10	10
696-2313WF	1/2" PEX F1960		B*	10	10
696-2313AF	1/2" PEX F2080		B*	10	10
696-2313VF	1/2" Viega PEX Press		B*	10	10
696-G2313MF	1/2" female sweat, no lead	✓	B*	10	10
696-G2313CF	1/2" CPVC male, no lead	✓	B*	10	10
696-G2313XF	1/2" PEX F1807, no lead	✓	B*	10	10
696-G2313WF	1/2" PEX F1960, no lead	✓	B*	10	10
ROUGH-IN PACK					
696-2313MR	1/2" female sweat		B*	10	10
696-2313CR	1/2" CPVC male		B*	10	10
696-2313XR	1/2" PEX F1807		B*	10	10
696-2313WR	1/2" PEX F1960		B*	10	10
696-2313AR	1/2" PEX F2080		B*	10	10
696-G2313CR	1/2" CPVC male		B*	10	10
ROUGH-IN PACK WITH 26" BAR					
696-2313MR26	1/2" female sweat		B*	10	10
696-2313CR26	1/2" CPVC male		B*	10	10
696-2313XR26	1/2" PEX F1807		B*	10	10
STANDARD PACK BAR-CODED IN DISPLAY BOX					
696-2313MFPK4	1/2" female sweat		B*	4	4
696-2313CFPK4	1/2" CPVC male		B*	4	4
696-2313XFPK4	1/2" PEX F1807		B*	4	4
696-G2313MFPK4	1/2" female sweat, no lead	✓	B*	4	4
696-G2313CFPK4	1/2" CPVC male, no lead	✓	B*	4	4
696-G2313XFPK4	1/2" PEX F1807, no lead	✓	B*	4	4

