

The power to watch anything, anywhere

The 2G+4+ Tiling Transmitter adds video tiling to the HDMI over IP matrix switching system.

The Just Add Power 2G+4+ Tiling Transmitter can be added to a currently installed Just Add Power 2G system to show any four sources onto a single display.

Watch video in multiple formats simultaneously: single-screen, video wall, or tiled video at the same time!



Seamless Integration! The 2G+4+ Tiling Transmitter is fully compatible with all 2G installations. Add a Tiling Transmitter to provide tiling to all displays. Multiple tilers can be combined to add even more videos on a single display.

2G+4+ Tiling Transmitter




**RX ETHERNET
INDICATOR LIGHTS
TX ETHERNET**

**FUNCTION
BUTTONS
STEREO OUT
HDMI OUT**


Compliance	HDCP & RoHS/FCC/CE
Operating Temp	0-60 °C / 32-140 °F
Supported Resolutions	Up to 1080p50/60 Hz PC: 1920 x 1200
Dimensions & Weight	429 x 44.5 x 250 mm 17" x 1.75" x 9.8" (19-inch rack, 1 RU) 2.9 kg / 6.4 lb
Ports	Ethernet connector (x5) HDMI Out 3.5mm Stereo Out IR Eye
Bandwidth	Up to 150 Mbps
Power Supply (included)	Standard Power Cable IEC 60320 C13/C14 50 watts maximum

Features
Combine 4 videos onto one display
<ul style="list-style-type: none"> 4 Receivers and 1 Transmitter Any 4 video inputs from 2G system New, independent compiled video output Compiled video viewable on any display
Compatible with all 2G products
HDMI out for local display
Stereo audio output with delay & volume control
Video Wall
Image Pull

All measurements are in millimeters (mm)

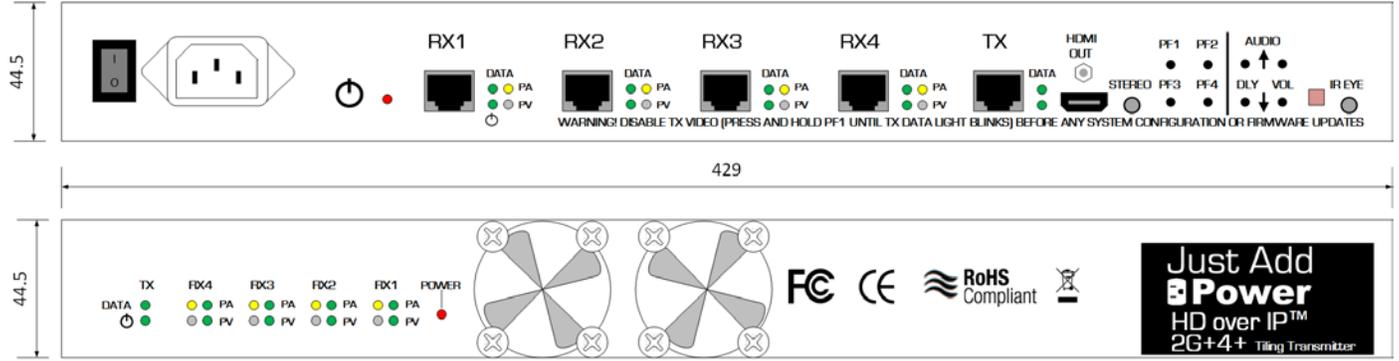

459A Front/Back

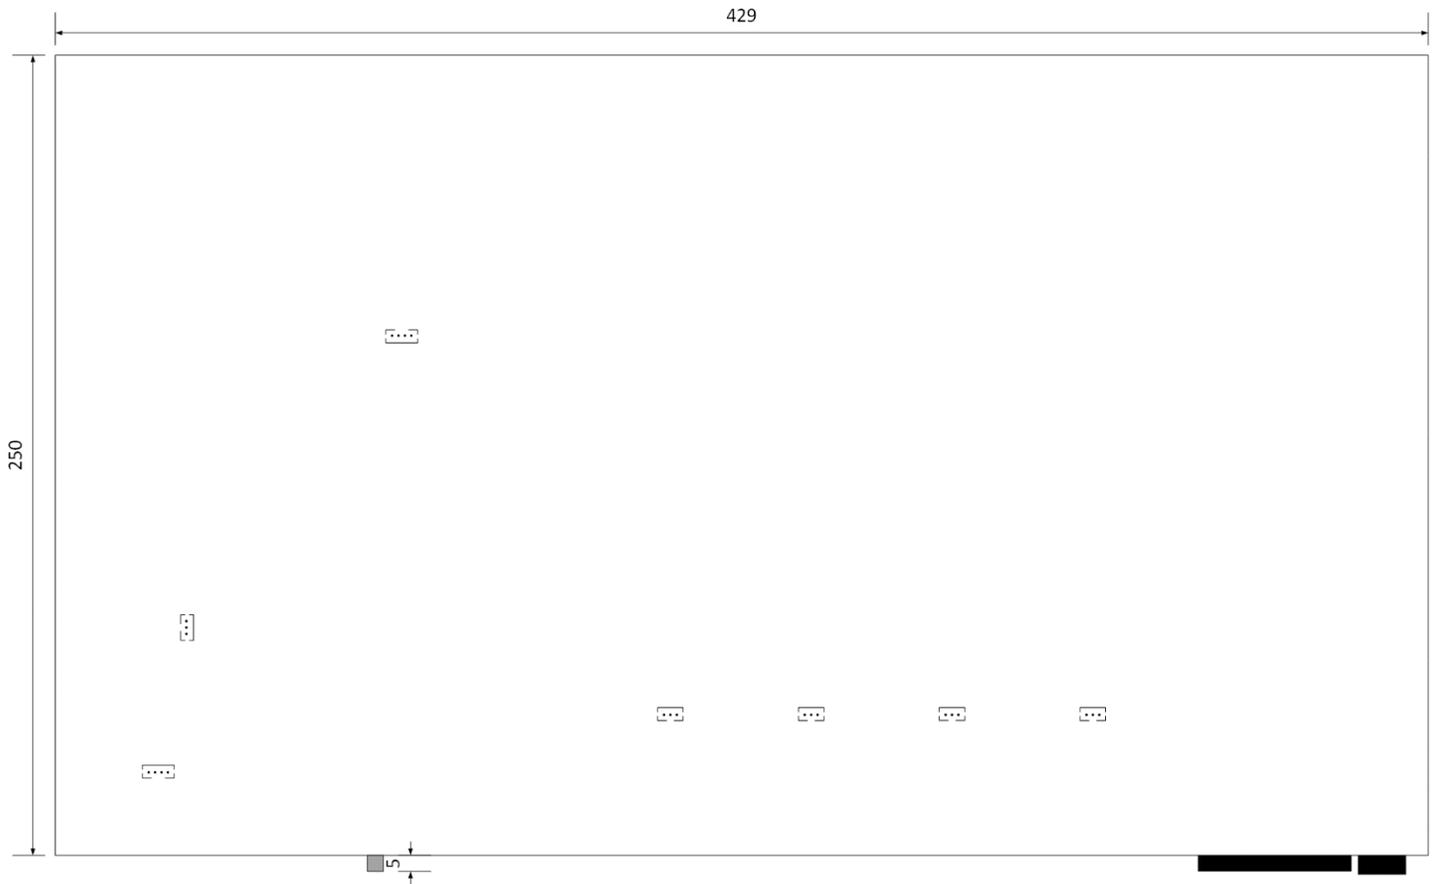

459A Bottom