


Light Duty Riser Clamp Fig. 008G

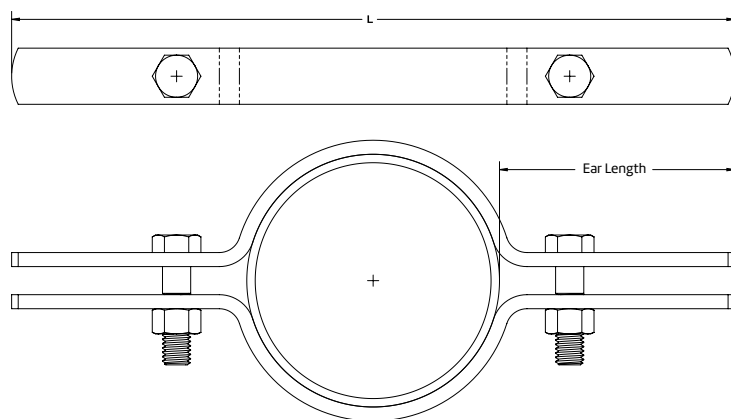

Size Range: ½" through 6" NPS

Material: Carbon steel

Finish: Electro-Galvanized

Service: Recommended for the suspension of stationary pipe.

Maximum Temperature: 450° F

Approvals: MSS SP-58 (Type-8)

Installation: Clamp is to be fitted and bolted below a coupling, hub or welded lugs on steel pipe. Bolt torques should be per industry standards. Clamp is designed for standard steel pipe O.D. and this must be considered in sizing the riser for other types of piping.

Ordering: Nominal pipe size and figure number.

Notes:

- For U.S. domestic product see Fig. 261 Riser Clamp.



Fig. 008G: Dimensions (in) Loads (lbs)

Pipe Size	Max Load	Length	Ear Length
½	150	5 ¹³ / ₁₆	2½
¾	150	6 ¹ / ₁₆	2½
1	150	6 ⁵ / ₁₆	2½
1¼	150	6 ¹¹ / ₁₆	2½
1½	150	6 ⁷ / ₈	2½
2	150	7 ³ / ₈	2½
2½	150	7 ⁷ / ₈	2½
3	200	8½	2½
4	250	9½	2½
6	480	11 ⁵ / ₈	2½

PROJECT INFORMATION	APPROVAL STAMP
Project:	Approved
Address:	Approved as noted
Contractor:	Not approved
Engineer:	Remarks:
Submittal Date:	
Notes 1:	
Notes 2:	