



[www.simpli-home.com](http://www.simpli-home.com)

## Product Specification

Item No.: Lowry Coffee Table AXCLRY-01 Distressed Charcoal Brown

Date: October 16, 2017

Product size: W-48" x D-22" x H-22"


Issued by: Ngoc Do

### Products Overview



2 DRAWERS OPPOSITE

# I. General dimension of products:

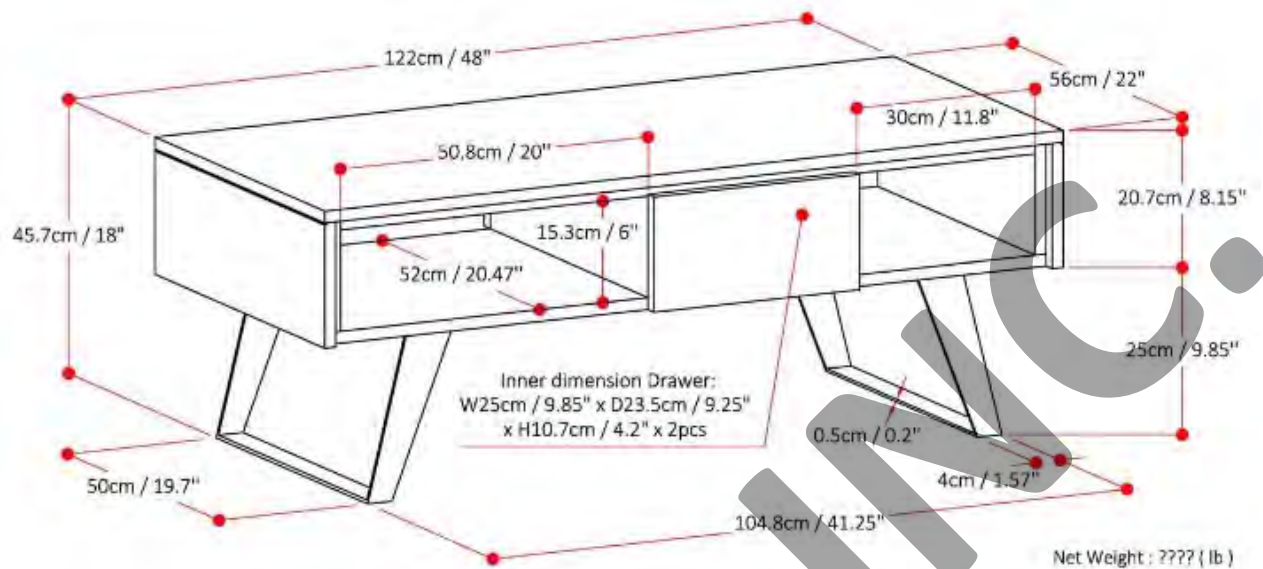

## REMARKS:

Please refer to technical drawings attached at the end for more details of dimension.

All dimensions should follow exactly as Axxcess's drawings. It was enclosed at the end of this document.

## **II. Materials reference:**

### **1. Solid Wood: All parts, except Leg Frame and Drawer Bottom Panel.**

- Species of wood: Acacia.
- Country of Origin: Vietnam.
- Kind of wood: COL.
- Grade: A, B.
- FSC Certificate: None.

### **2. Metal: Leg Frame.**

- 5mm thickness metal plate.
- Country of Origin: Vietnam.
- Manufacture: Trian Dat Co. Ltd.
- Metal frame must be resistant to corrosion: Withstand 24 hours in 1% salt spray test.

### **3. Plywood: Drawer Bottom Panel.**

- 3mm thickness plywood.
- Standard: CARBP2.
- Country of Origin: Vietnam.
- Manufacture: Homer Wood Product (Vietnam) Co. Ltd.

### **4. Glue (using in production process as lamination, joint, ect.)**

- Water proof glue, D4 standard.
- Country of origin: Vietnam
- Manufactured:
  - o Konishi Lemindo Vietnam Co., Ltd.

### **COMPLETED PARTS:**



### **III. Construction/Specifications:**

- Before mass production, product needs to pass all related tests – conform to US Consumer Product Safety Commission - at Approved Labs.
- All wood must be kiln dry before production and maintained at a humidity level between 8-12% during the manufacturing process.
- The variance of moisture between 2 lamellas cannot be over 2%.
- Width of lamination: should be between 40-80mm. The lamination should have the same width on a board.
- All wood must be free from insect or fungal contamination.
- Wood with sign of previous contamination must not be used (woodworm holes, signs of mould ...).
- All products must be free from physical defects such as poor finish, patchy areas, contamination, pin holes or pitting.
- The surface finish must not discolor, come loose, peel, chip or flake during normal handling or use.
- Finished wood must be smooth and evenly finished, free from cracks, splinters, rough edges and uneven coatings. Hair cracking is considered as critical point.
- Dent, chipped mark, nick... are not allowed.
- Dead knots must not be present on finished wood.
- Filler must not be visible on visual surface (always in view by customer) and must be no bigger than 5mm x 5mm on other surfaces.
- All load bearing pieces must be free of knots.
- There must not be knots at joints.
- Live knots must be less than 2cm and not exceed 1/3 width of lamella. And only 3 live knots are allowed on each surface, spacing between live knots need to be minimum 10 centimeters.
- Sap wood: can not be visible. It's allowed for max length 10cm + width 1cm on hidden surface.
- Discolor / Black grain: must not be acceptable in visible surface.

#### **REQUIREMENTS FOR METAL PARTS / FRAME:**

- Metal should be zinc galvanized.
- Do not accept sharp point or sharp edge.
- Surface of metal must be flat and smooth.
- Dimension of parts / frames must follow technical drawings.
- Weld must be clean and smooth, have no cracks or holes.
- Metal parts / frames must be resistant to corrosion: Withstand 24 hours in 1% salt spray test.

#### **IV. Finish / Color:**

##### **A. Wood parts:**

###### **1. Stain:**

- Country of origin: Vietnam
- Lead content: not exceed 90ppm (0.009% by weight).
- Manufactured:
  - o VINA PAINT CO.

###### **2. Color: Distressed Charcoal Brown (AX-215-DCB).**

- 6 Steps (with glazed): Prestain / Sealer / Glaze / Sealer / Stain / Top coat
- Color swatch should be approved by Axxess before production starts.
- Any treatment use on wood (stain, preservatives, varnishes) must not release color or other staining during use.

##### **B. Metal parts:**

###### **1. Coating:**

- Powder coating required.
- Country of origin: Vietnam
- Lead content: not exceed 90ppm (0.009% by weight).
- Manufactured:

###### **2. Color: Black (follow approved swatches)**

##### **REQUIREMENTS FOR FINISHING OF PRODUCTS:**

- Lacquer / coating should be tested at Approved Labs for Total Lead Content according to CPSC before mass production.
- All surfaces have to be sanded properly with appropriated sanding papers (No. 120 – 150 – 180 – 220 – 320 – due to each stage of process) before painting applied.
- All parts must be stained properly on all surfaces and all edges including the surfaces that might end up hidden.
- The bottom of the legs and the bottom edge of side panels should be painted or sealed with lacquer.
- All pre-fixed structures have to be pre-stained correctly prior to assembling. This will avoid exposed unfinished lines once these parts shrunk.
- Pre-stains should be applied with darker color than color of products.
- Especially on edges of furniture: all edges should be WELL finished: on the exposed edges of the drawers, edges of top panels, tops of frame, side of frame, inside the cabinet.
- The NC coating should be evenly spread on the surface of the wood, and due to there are different absorption rates on the wood surface, factory has to apply more coating to the edges, in order to make these edges appear to have better finish.
- Finishing steps and lacquer used should follow the steps mentioned on the color swatch signed by Axxess. Any change needs to be approved prior to applying.
- Color must be consistent from product to product, from order to order.

**V. Hardware:**

- All coatings on metal parts and hardware must comply to CPSIA regulation:
  - US Code of Federal Regulations Title 16 CFR 1303 for total Lead content in surface coating.
  - US Consumer Product Safety Improvement Act 2008 Title I Section 101 for total Lead content in surface coating.
- Country of origin: Vietnam.
- Manufactured by:
  - Lidovit Co. Ltd,
  - Trien Dat Co. Ltd.,
- All hardware must be resistant to corrosion: Withstand 24 hours in 1% salt spray test.
- Drawer glides: fully extension ball bearing I glide.



## VI. Packaging:

Packaging must pass ISTA 3A testing by Approved Labs.

### A. Hardware package:

- Each type of hardware should be packed separately in a zip-bag, with a label that shows the hardware number – similar to the assigned number which is printed on the Assembly Instructions.



- Hardware bags must be clear of all wood parts and must be completely covered by microfoam sheet, then wrapped by 2 ply cardboard sheet. Hardware bags must be placed firmly in a room to avoid damage or scratch the wood parts.



### B. Carton box:

- It's required to use "Full Telescope Design Style Tray" carton style only.
- Carton: Double-wall (5 Ply) Corrugated, 6.5mm thickness; Burst strength: Minimum of 275lb/in<sup>2</sup>.
- All EPS foam used at corners and at all sides will be at least with density D.12.
- All EPS foam used for dunnage should be at least with density D.12.



**C. Packaging instruction:**

- Product should be dried completely before packaging.
- Product should be cleaned completely before packaging. Any dust, stains... are not allowed on any surface.
- All parts wrapped by foam sheet. Foam sheets must cover all surfaces to avoid damage of parts during transit.
- All parts should be tightly bundled in order to make sure they can not be moved during transit.
- EPS foam thickness 20mm should be used on all sides to protect products inside.
- All parts wrapped by foam sheet. Foam sheets must cover all surfaces to avoid damage of parts during transit.



Using "L" Pads at all edges of carton



EPS foam at all corners and 6 faces of carton

**Reinforce tape (full length of 2 short edges)**



**1 line of scotch tape cover full 4 edges.**

Closing carton box




- Reinforcing tape 70mm width must secure the 2 short open edges of box. Apply scotch tape 80mm width along the open edge of carton (cover the reinforce tape). Do not apply the scotch tape across the open edge.
- High quality reinforcing tape and scotch tape must be used.
  - o Brand name: CHOICE PROTECH.
  - o Country of origin: Vietnam
- The tape should not come loose, and not cover the barcode number.




- Packaging must follow packaging process which was approved by Axxess Technical and Quality Assurance Department.
- Notes :
  - Carton layout must be approved by Axxess Inc. before mass printing.
  - Marking should be in correct colors (red or black) as per instruction.
  - The red strings – used to identify the hardware inside the box – must be attached to hardware bag at one end, and the other end must be attached outside carton.
  - Axxess will not accept carton boxes with damages: torn, scratches... or with footprints on boxes.

**VII. Sticker / Labels:**

- Shipping marks: must be complied with Axxess's requirement. Must be approved by Axxess before mass printing.
- Sticker/Label:
  - o CARBP2 Label:



- o Chemical Label:

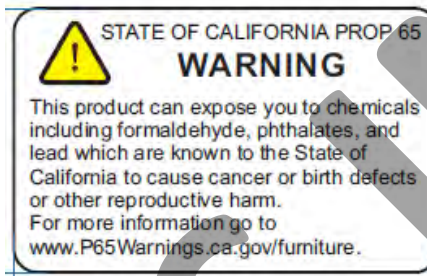**VIII. Assembly Instruction:**

Please see Assembly instruction sheet enclosed at the end of this document.

***IX. Product pictures and detail structure:***



SIDE VIEW



DRAWER OPEN



BOTTOM VIEW



U2 groove


Wood grain  
vertical



Metal leg 5mm thickness


Canvas piece

TECHNICAL DETAIL

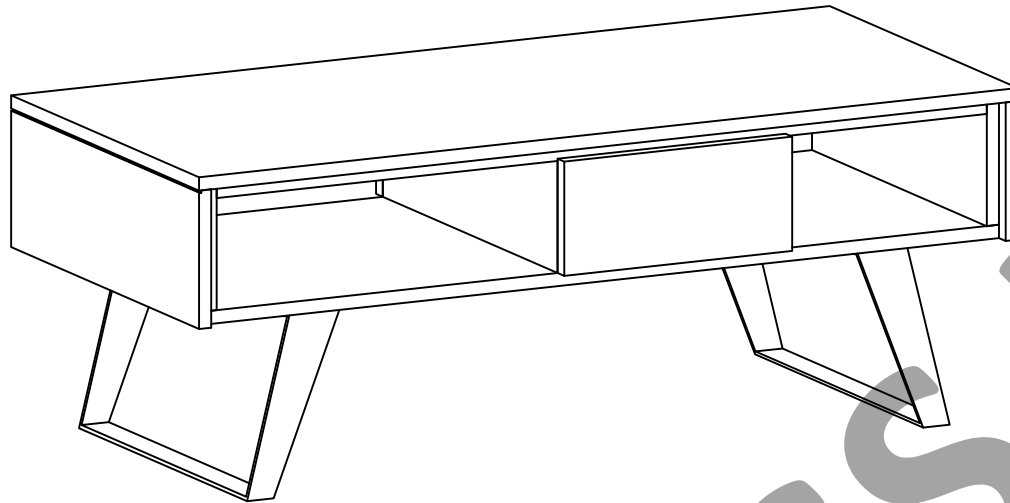

#### SPECIFICATIONS:

- Color: Distressed Charcoal Brown  
( Drawer Fronts only are wire brushed ).
- Material: Solid Acacia.
- Bottom Drawer : Plywood 3mm.
- 2 separate drawers with wheel glides and Push style drawers.
- Leg : Iron ( Powder coating black color ).
- No visible hardware.

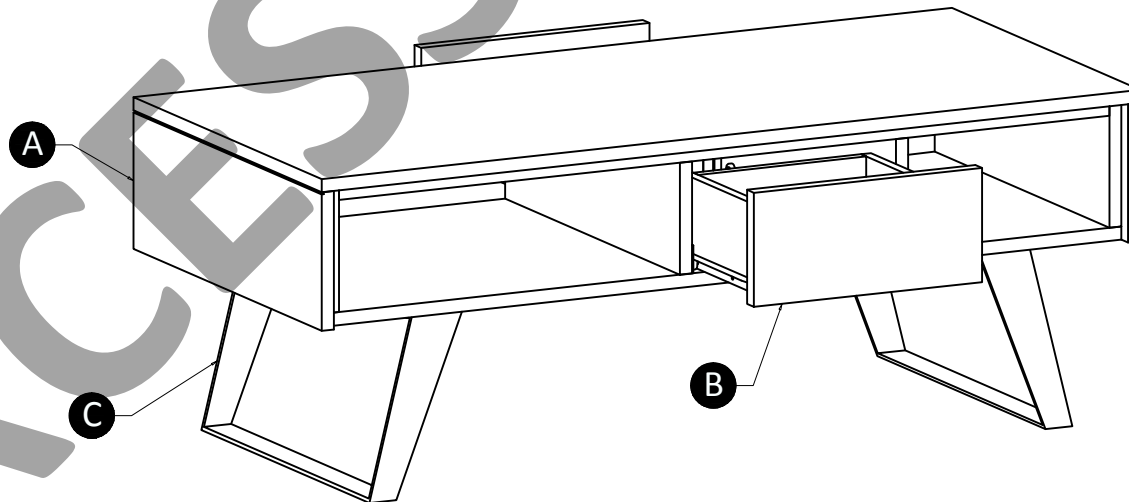

**CCT Global Sourcing**  
40 Bradwick Drive Unit 5 & 6  
Concord, Ontario L4J 8P3  
Tel: 905-326-8452 Fax: 416-990-0358

This drawing is the exclusive property  
of Access-world.  
In no case, it may be used or  
reproduced without written consent  
of Access-world

Drawn by

Check by

Approved by

Vo Ngoc Pho

Tran Dinh Quan

Yoram Weinreich

Item code

XXXXXX-XX

Version

00

Format: A4

Unit: mm



Scale  
1:10

Product:

**LOWRY COFFEE TABLE**

**48" x 22" x H18"**





Sheet

1/4

Detail:

COMPONENTS-KEY DIAGRAM

Ref.  
XXXX

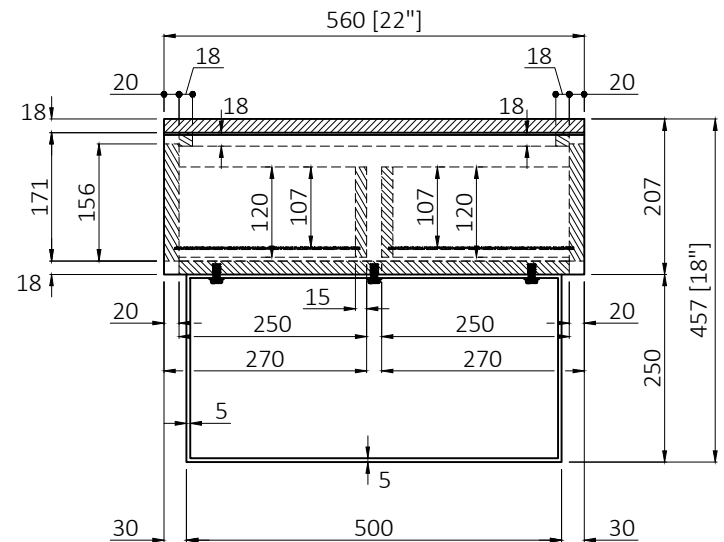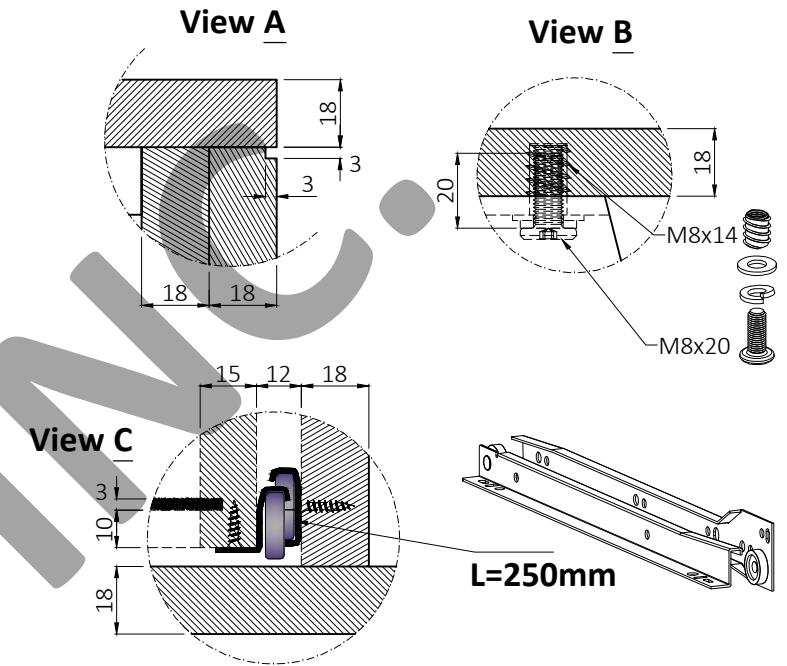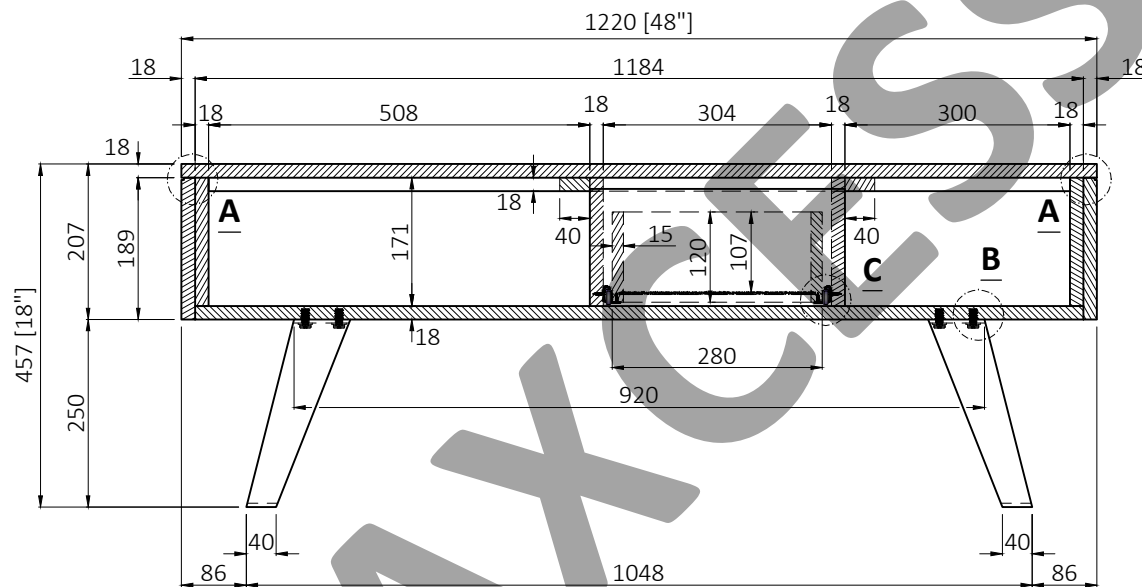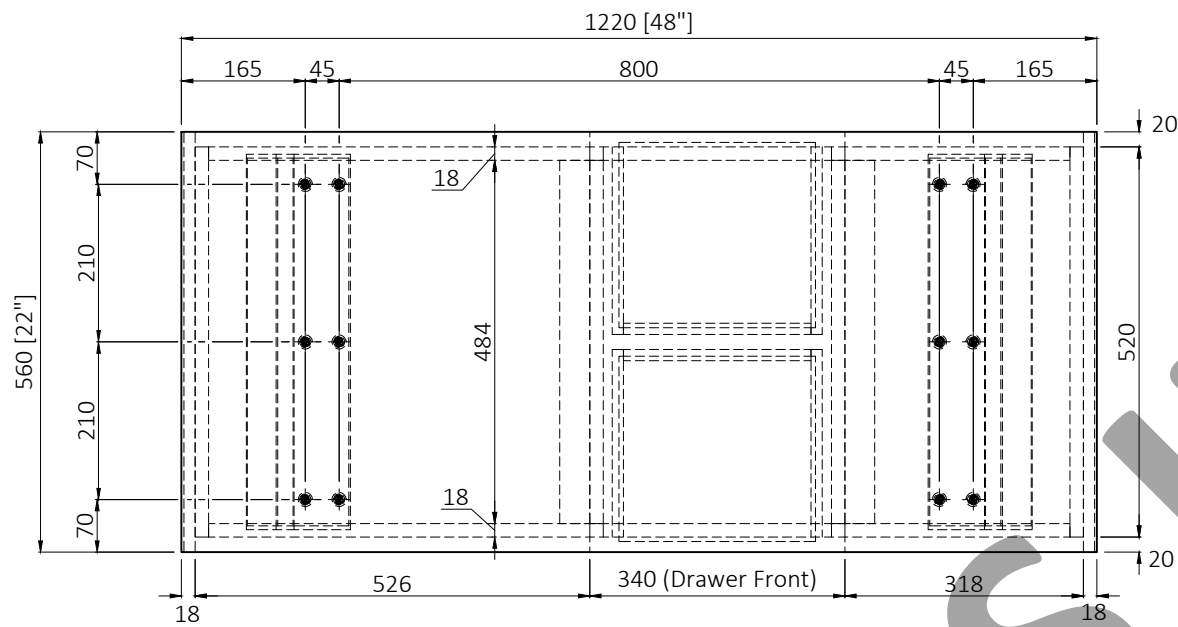

**CCT Global Sourcing**  
40 Bradwick Drive Unit 5 & 6  
Concord, Ontario L4J 8P3  
Tel: 905-326-8452 Fax: 416-990-0358

This drawing is the exclusive property of Access-world.  
In no case, it may be used or reproduced without written consent of Access-world

Drawn by

Check by

Approved by

Vo Ngoc Pho

Tran Dinh Quan

Yoram Weinreich

Item code

XXXXXX-XX

Version

00

Format: A4

Unit: mm



Scale  
1:10

Product:

**LOWRY COFFEE TABLE**  
**48" x 22" x H18"**





Sheet  
2/4

Detail:

GENERAL VIEW

Ref.  
GV



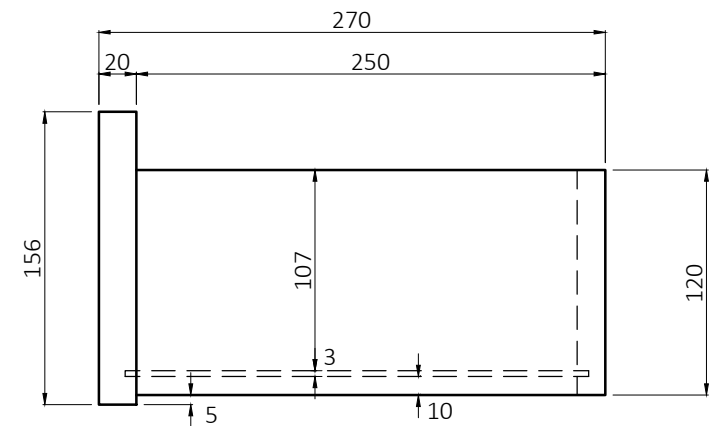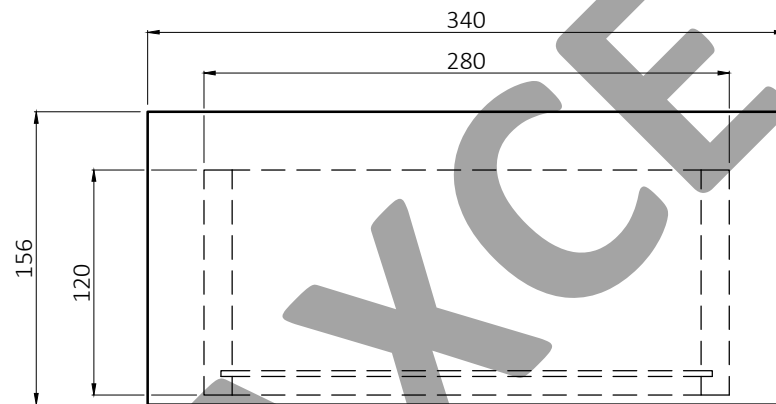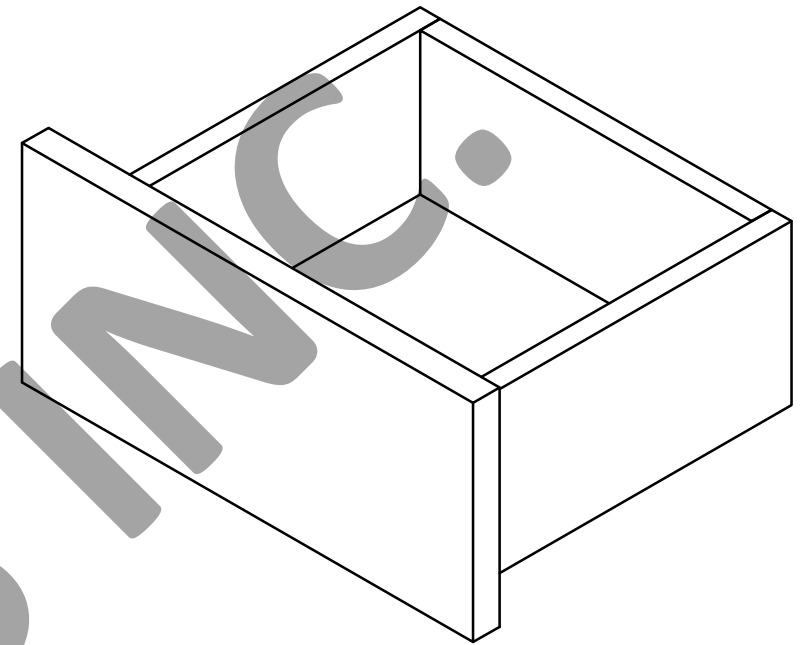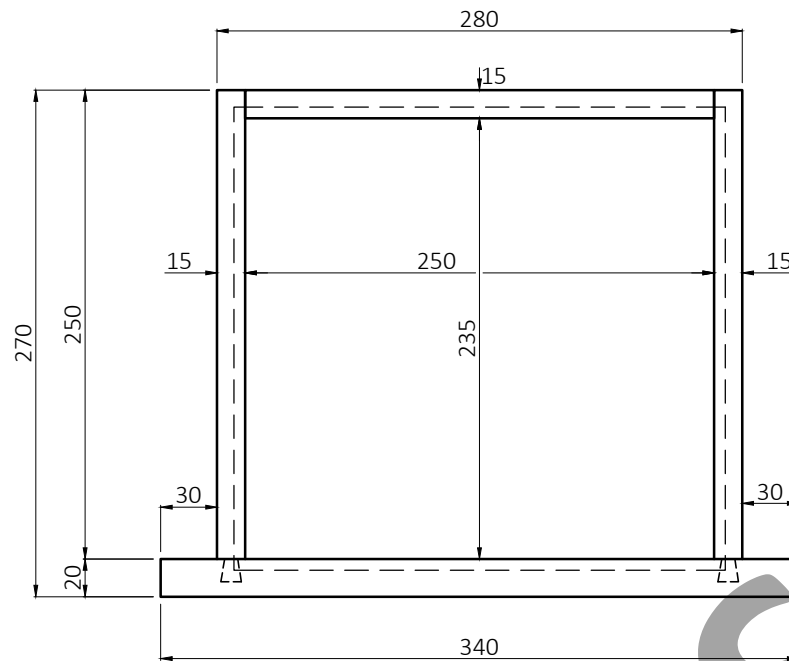

**CCT Global Sourcing**  
40 Bradwick Drive Unit 5 & 6  
Concord, Ontario L4J 8P3  
Tel: 905-326-8452 Fax: 416-990-0358

This drawing is the exclusive property  
of Access-world.  
In no case, it may be used or  
reproduced without written consent  
of Access-world

Drawn by

Check by

Approved by

Vo Ngoc Pho

Tran Dinh Quan

Yoram Weinreich

Item code

XXXXXX-XX

Version

00

Format: A4

Unit: mm



Scale  
1:4

Product:

**LOWRY COFFEE TABLE**





**48" x 22" x H18"**

Sheet  
3/4

Detail:

DRAWER

Ref.  
B

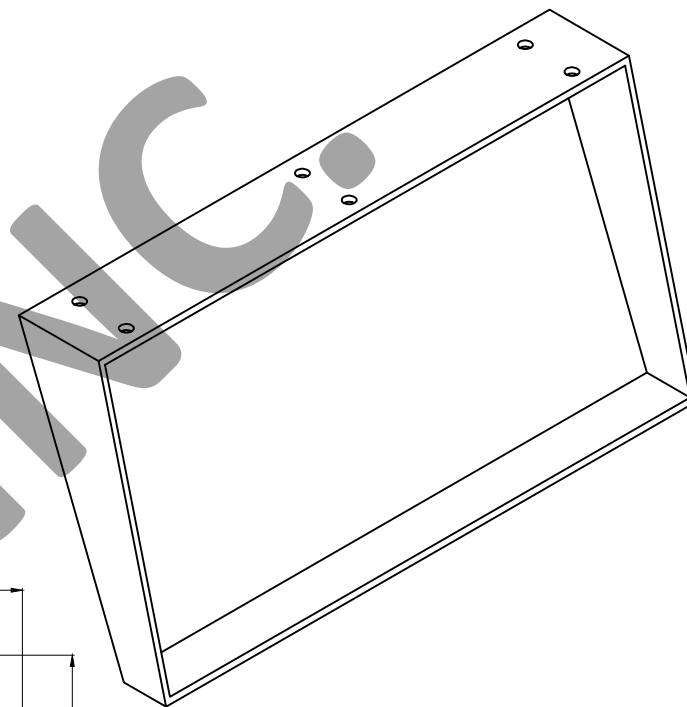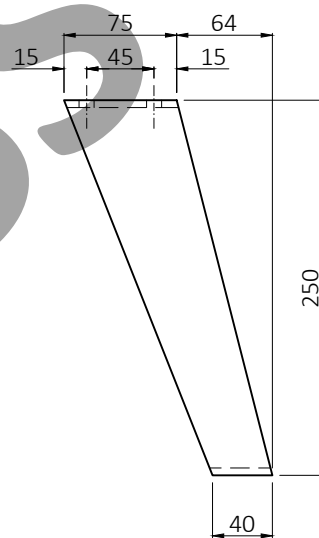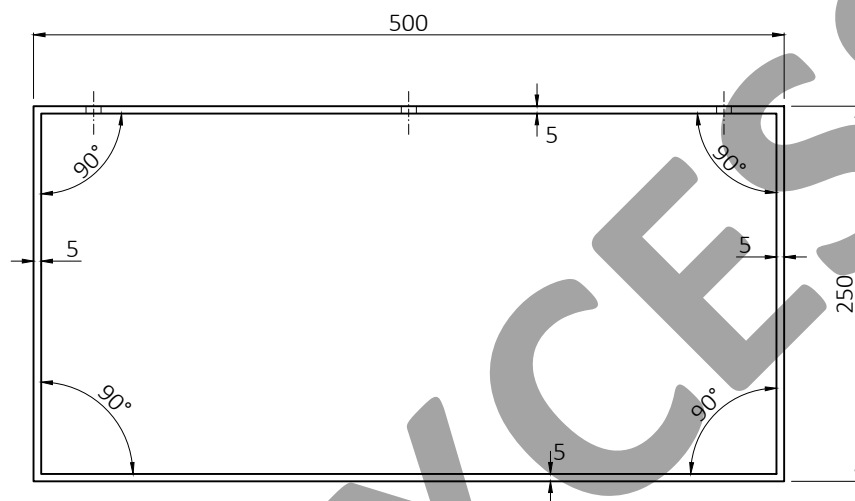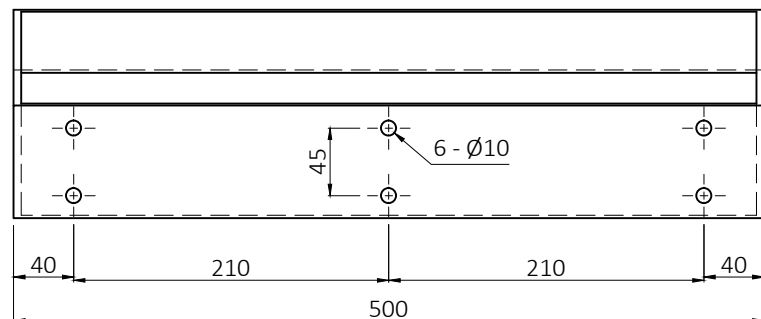

**CCT Global Sourcing**  
40 Bradwick Drive Unit 5 & 6  
Concord, Ontario L4J 8P3  
Tel: 905-326-8452 Fax: 416-990-0358

This drawing is the exclusive property  
of Access-world.  
In no case, it may be used or  
reproduced without written consent  
of Access-world

Drawn by

Check by

Approved by

Item code

XXXXXX-XX

Version

00

Format: A4  
Unit: mm



Scale  
1:5

Product:

**LOWRY COFFEE TABLE**  
**48" x 22" x H18"**

Sheet  
4/4

Detail:

LEG

Ref.  
C

Vo Ngoc Pho

Tran Dinh Quan

Yoram Weinreich