


REV	DESCRIPTION	BY DATE	APPD
A	RELEASED PER ECR 7733	JED 7/7/03	JEM

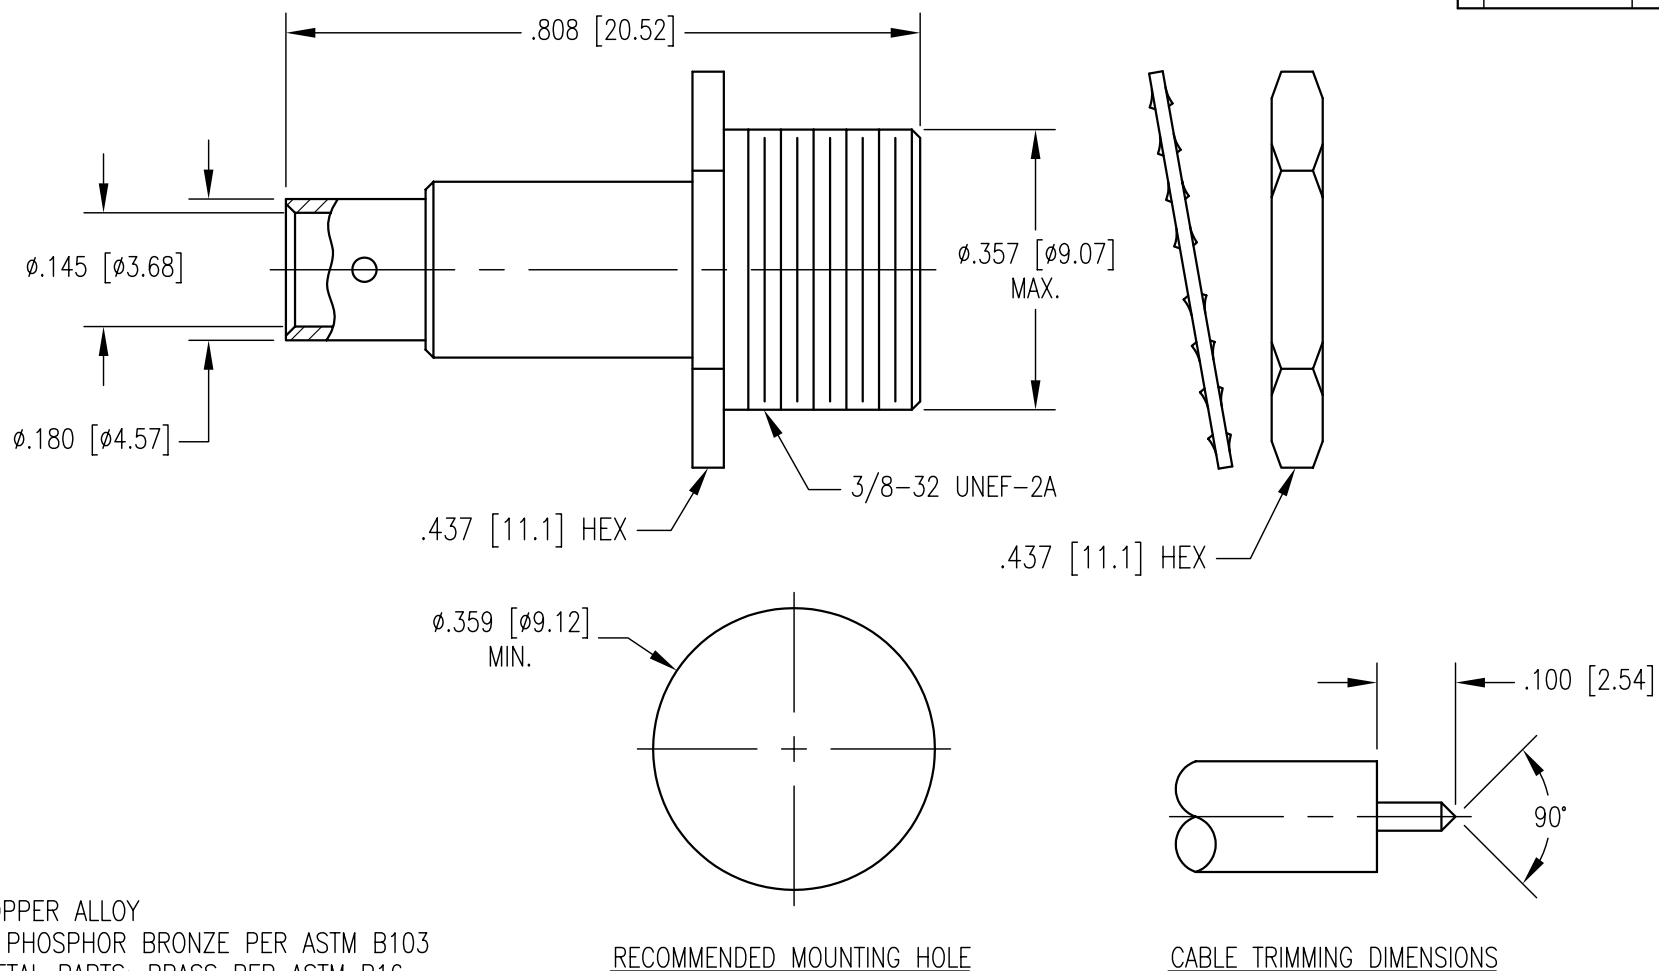

NOTES:

1. MATERIALS:

CONTACTS: COPPER ALLOY

LOCKWASHER: PHOSPHOR BRONZE PER ASTM B103

ALL OTHER METAL PARTS: BRASS PER ASTM B16

INSULATOR: TEFLON PER ASTM D1710

2. FINISH:

CONTACTS AND SHROUD: .000030 MIN. GOLD PER MIL-G-45204 OVER

.000050 MIN. NICKEL PER QQ-N-290

BODY: .000015 MIN. GOLD PER MIL-G-45204 OVER

.000050 MIN. NICKEL PER QQ-N-290

ALL OTHER METAL PARTS: .000005 MIN. GOLD PER MIL-G-45204 OVER

.000050 MIN. NICKEL PER QQ-N-290

3. FOR USE WITH .141 DIA. SEMI-RIGID CABLE OR EQUIVALENT.

4. FOR CABLING PROCEDURES USE CAP 5-24 WITH TRIMMING DIMENSIONS SHOWN.

PER ASME Y14.5M-1994
UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES [MM]

TOLERANCES:

DECIMALS .XX ± .01 [0.254]
.XXX ± .005 [0.127]

ANGLES ± 2° SCALE: 4:1

CUSTOMER
DRAWING



NORTHROP GRUMMAN

Winchester Electronics 62 Barnes Industrial Road North
Wallingford, CT 06492

TITLE

BMA STRAIGHT BULKHEAD JACK

DRAWN JED	DATE 7/23/02	CHECKED JWH	DATE 9/5/02
APPROVED JEM	DATE 9/5/02	APPROVED MG	DATE 9/5/02

A	SD361-595-1410H	SHT. 1	OF 1	REV. A
---	-----------------	-----------	---------	-----------