


---

Owner's Manual | BD-SMNSN

# BlueDri<sup>®</sup> COMMERCIAL SUPER MONSOON AIR MOVER

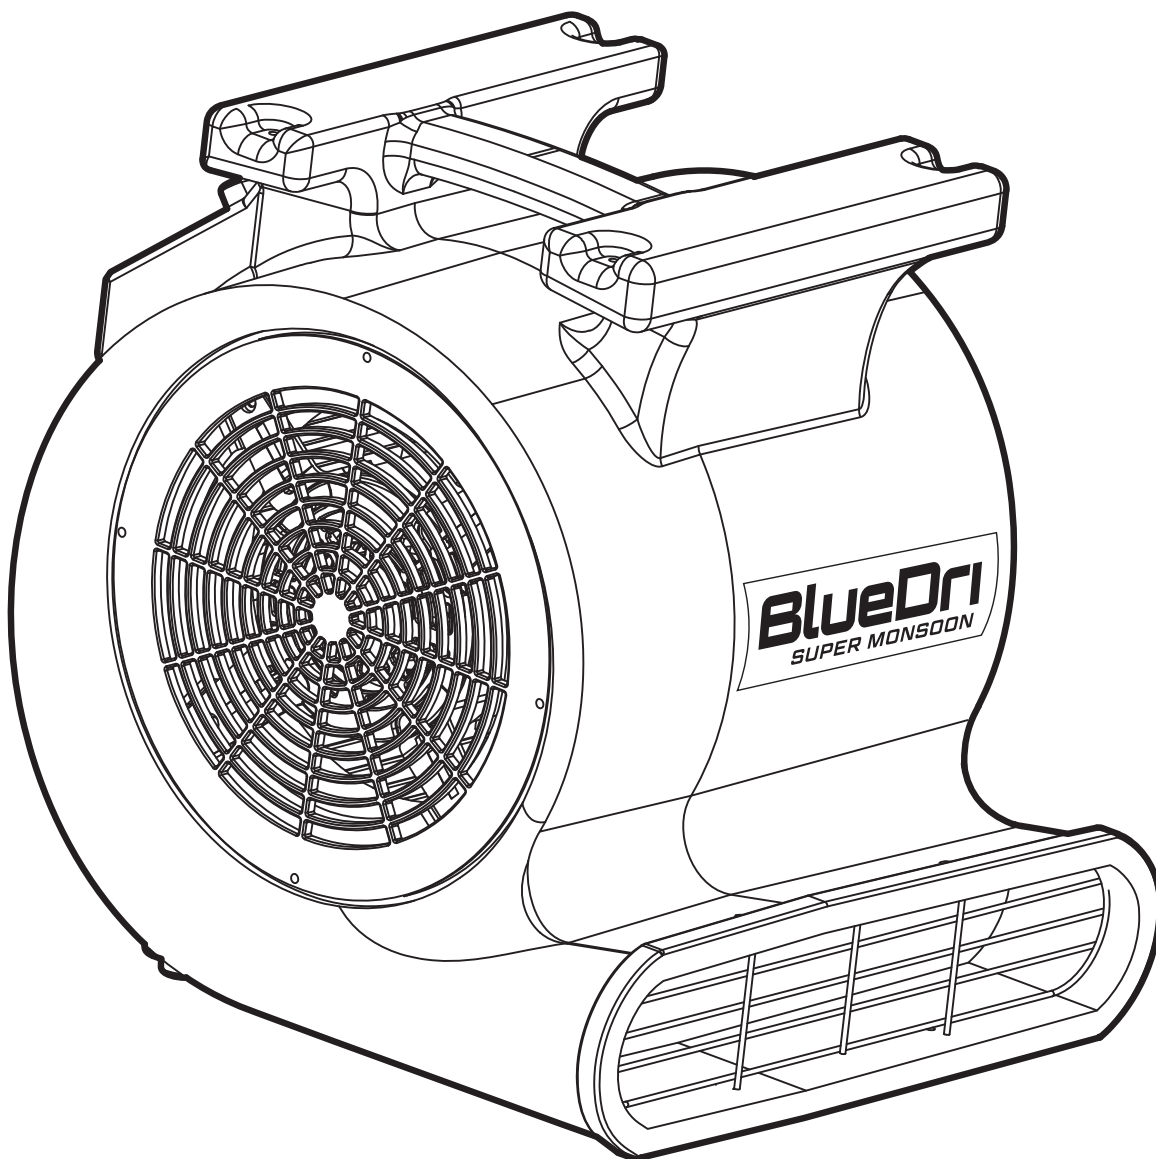

Read and save these instructions.

**BlueDri**



## WARNING



### IMPORTANT SAFETY INSTRUCTIONS

When using electrical appliances, these instructions and warnings should always be followed to reduce the risk of fire, electrical shock and injury to persons:



**Read all instructions before using this Fan.**



#### WARNING

**TO REDUCE THE RISK OF FIRE, ELECTRICAL SHOCK OR PERSONAL INJURY, ALWAYS FOLLOW THESE IMPORTANT SAFETY INSTRUCTIONS AND WARNINGS:**



**DO NOT** use this Fan to ventilate areas where flammable liquids or vapors are used, stored or are present, including paints, gasoline, varnishes, floor refinishing products or solvents. **ALWAYS** read and follow all warnings and instructions on the containers for these products!



**ALWAYS** be sure the plug fits tightly into the outlet. When plugs fit loosely into outlets, they may slip partially out of the outlet and create a poor connection. This may cause outlets to overheat and create a potential fire hazard. Outlets in this condition should be replaced by a qualified electrician.



**ALWAYS** unplug the power cord when servicing, cleaning or moving the Fan. **DO NOT** use the ON/OFF switch as the sole means of disconnecting power. **NEVER** leave children unattended when the Fan is on or plugged in. **ALWAYS** turn off and unplug the Fan when not in use.



Use **ONLY** GFCI protected receptacles if utilizing as an installation type Fan.



**BE CERTAIN** that the power source for the Fan is 120V AC. **DO NOT** plug the Fan into 240V or other power source. The power cord is equipped with a three-prong grounded plug that must be inserted into a matching receptacle. Under no circumstances should the grounding prong be cut off the plug. Where a two-prong wall receptacle is encountered, it must be replaced with a properly grounded three-prong receptacle installed in accordance with the National Electrical Code (NEC) and all applicable local codes and ordinances. This work must be done only by a qualified electrician, using copper wire only.

**DO NOT USE A THREE-PRONG TO TWO-PRONG ADAPTER. IMPROPER CONNECTION MAY CREATE THE RISK OF ELECTRICAL SHOCK. USE OF SUCH ADAPTERS IS NOT PERMITTED IN CANADA.**

**WARNING: TO REDUCE THE RISK OF FIRE OR ELECTRICAL SHOCK, DO NOT USE THIS FAN WITH ANY SOLID STATE SPEED CONTROL DEVICES.**



#### CAUTION

**To reduce the risk of fire or electric shock,  
Do not use this fan with any solid-state speed control device.**

- **DO NOT** operate any fan with a damaged cord or plug. Discard fan or return to an authorized service facility for examination and/or repair.
- Unplug or disconnect the unit from power supply before servicing.
- **DO NOT** use extension cords, power strips, power taps, outlet style air fresheners or other cord connected device, as these devices may overheat and cause a fire hazard.
- **DO NOT** route power cord under rugs, carpets, runners or furniture. This may damage the cord or cause it to overheat creating a fire hazard.
- **ALWAYS** place the fan on a stable, flat, level surface while in operation to prevent the fan from overturning.
- **NEVER** insert or allow fingers or objects to enter grill openings while fan is in operation or injury and/or damage to the fan may occur.
- **DO NOT** block, cover or obstruct air flow to or from the fan while in operation.
- **DO NOT** use this fan outdoors or near wet locations such as a bath tub, pool, hot tub or pooled water. Use of this fan in a wet location may create a shock hazard.
- **DO NOT** run cord under carpeting. Do not cover cord with throw rugs, runners, or similar coverings. Do not route cord under furniture or appliances. Arrange cord away from traffic area where it will not be tripped over.
- **DO NOT** use this fan if it has been damaged or is not functioning properly.
- **DO NOT** operate unit in stacked position.
- **DO NOT DROP** fan it may cause damage that could affect safety.
- **WARNING:** To reduce the risk of fire, electric shock, or injury to persons, do not use replacement parts that have not been recommended by the manufacturer (e.g. parts made at home using a 3D printer).
- **THIS FAN DOES NOT MEET THE REQUIREMENTS OF NEC ARTICLE 547-7 (2008).** This Fan is not suitable for use in agricultural facilities including areas where livestock, poultry or other animals are confined. Please refer to National Electric Code (NEC) Article 547-7 (2008), or applicable state or local codes or standards relating to electrical requirements for agricultural buildings.
- **THIS FAN DOES NOT MEET THE REQUIREMENTS OF NEC ARTICLE 500 (2008).** This Fan is not suitable for use in hazardous locations. Please refer to National Electric Code (NEC) Article 500 or applicable state or local codes or standards relating to electrical requirements for hazardous locations.

## Introduction

The BD-SMNSN is a commercial air mover used by professionals in various water damage restoration and janitorial and sanitation applications. The heavy-duty air mover delivers industry-leading air flow and tackles any job with ease.


## Product Features

- No assembly required
- 3 speed operation
- Energy efficient – draws only 10A on high
- Integrated cord wrap
- 3 operating positions - 0°, 45° or 90°
- Stackable – Up to 3 units high


## Operation

- 1) Place the unit on a level and stable surface.
- 2) Plug the unit into a 120 volt GFCI grounded outlet with the correct voltage and amperage. For maximum protection against electrical shock, ALWAYS use a circuit that is protected by a ground fault circuit interrupter. If you are unsure about the outlet, check with a qualified electrician or service person. Do not use an adapter or extension cord.
- 3) To switch the unit on, locate the control panel and rotate switch to low, medium or high speed setting.
- 4) The multipurpose design allows operating positions for horizontal, 45° and 90° angles. The balanced handle also acts as an optimum cord wrap assembly freeing the BD-SMNSN of obstructions.

### Air Flow

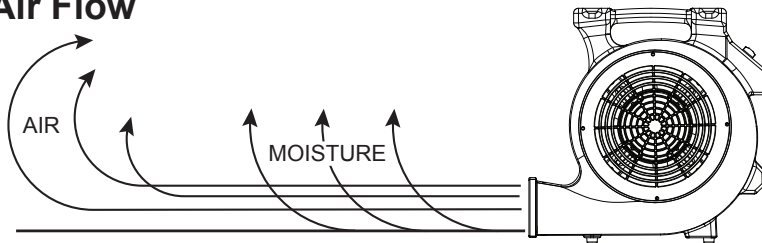

### Operating Positions

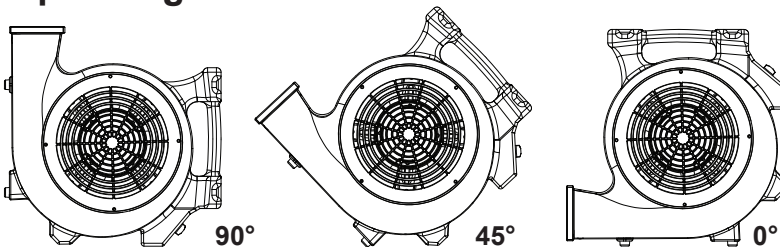


### Stack Multiple Units

Stack the fans on top of each other as shown.

### ⚠ WARNING


Do not stack more than three units of this appliance.

Stacking function is not secure during transportation.

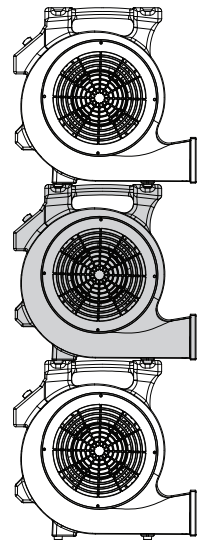


## Transportation

Transport the Fan using the handle on top of the unit.

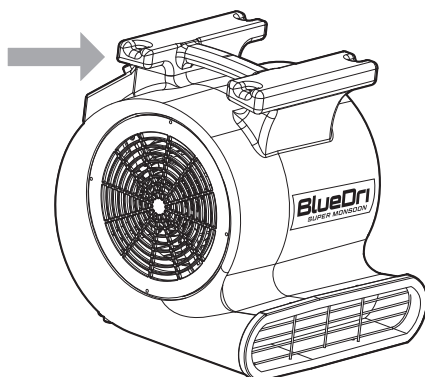


Control Panel  
• High  
• Medium  
• Low

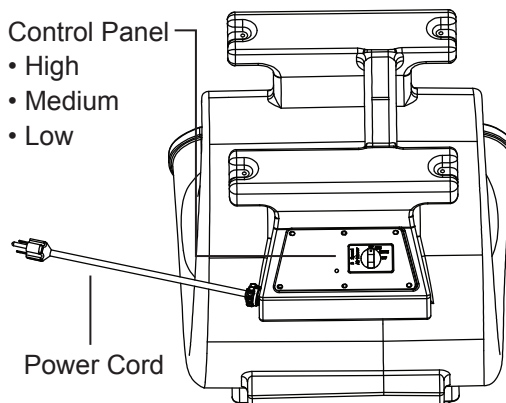

Power Cord

Balanced Carrying Handle

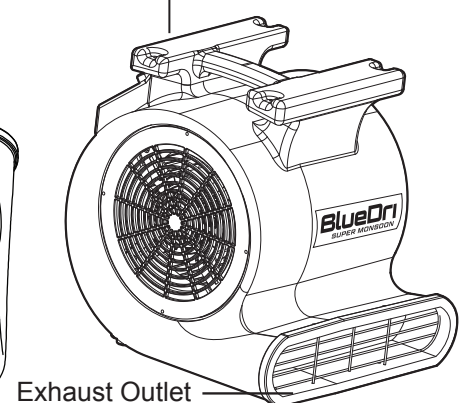

Exhaust Outlet

## SAFETY FEATURE

1. A thermal overload protector is built in to prevent overheating.
2. If an overheat temperature is reached, the Air Mover will automatically shut off. It can only resume operation when the user resets the unit.

To Reset Air Mover:

1. Unplug the Air Mover and wait 10 minutes for the heater to cool down.
2. After the Air Mover has cooled down, plug the unit into a 120v~ electrical outlet and follow the operation instructions described in this manual.

## MAINTENANCE

 **WARNING** To reduce the risk of electrical shock and fire please observe the following instructions:



- Always unplug the cord before moving, servicing or cleaning.
- NEVER place the Fan in or near water.



- Clean the Fan only with a vacuum equipped with a brush attachment; the vacuum will remove the lint and dirt from inside the Fan.
- Never attempt to take apart the Fan.
- Clean the body of the Fan with a soft cloth only.
- NEVER use ALCOHOL or SOLVENTS such as gasoline, benzene, paint thinner, or other harsh cleaners.

## TROUBLE SHOOTING TIPS

If your Fan fails to operate, see below for a list of probable cause and solution:

Be sure the power cord is plugged into a working electrical outlet.

If you have a problem that can not be resolved by the steps listed above, contact Technical Assistance at (800) 233-0268, Monday through Friday, between the hours of 8:00 a.m. and 5:00 p.m. Eastern.

**STORAGE:** Store the Fan with these instructions, in the original carton in a cool, dry place.


**LUBRICATION:** Motor is permanently lubricated. No maintenance is required.

**DISPOSITION:** Corrugated packaging materials are recyclable. For environmentally responsible disposal of this product, contact your local waste service provider or visit [www.1800recycling.com](http://www.1800recycling.com).

## Troubleshooting

| Problem                                           | Possible Cause/Solution                                                                                                                                                                                                                                                                                                       |
|---------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Unit will not run                                 | <ul style="list-style-type: none"><li>• No power to unit-Plug it in. Check circuit breaker</li><li>• Switch not on-Place in "ON" position.</li><li>• Switch is faulty-Replace switch.</li><li>• Faulty/broken cord or motor wire-Perform continuity check, using volt/amp meter. Repair/replace faulty broken wire.</li></ul> |
| Unit runs but air mover makes loud scraping noise | <ul style="list-style-type: none"><li>• Unit has been severely jolted causing blower wheel to rub against housing-Remove motor and replace damaged motor mounts.</li><li>• Unit has been severely jolted causing housing to deform-Replace blower wheel.</li></ul>                                                            |
| Unit runs but vibrates excessively                | <ul style="list-style-type: none"><li>• Severe jolt has bent motor shaft causing unit to be out of balance-Remove and replace motor.</li><li>• Air mover blade damaged-Replace blade if necessary.</li><li>• Dirt build up on one side of air mover blade-Clean air mover blade.</li></ul>                                    |
| Unit runs but blower wheel does not turn          | <ul style="list-style-type: none"><li>• Motor bearings are falling or motor has developed an internal electrical fault-Replace motor.</li><li>• Intake grill and/or exhaust grill is obstructed-Replace blade if necessary.</li><li>• Excessive duct length-Reduce duct length to recommended maximum.</li></ul>              |

## Unit Assembly

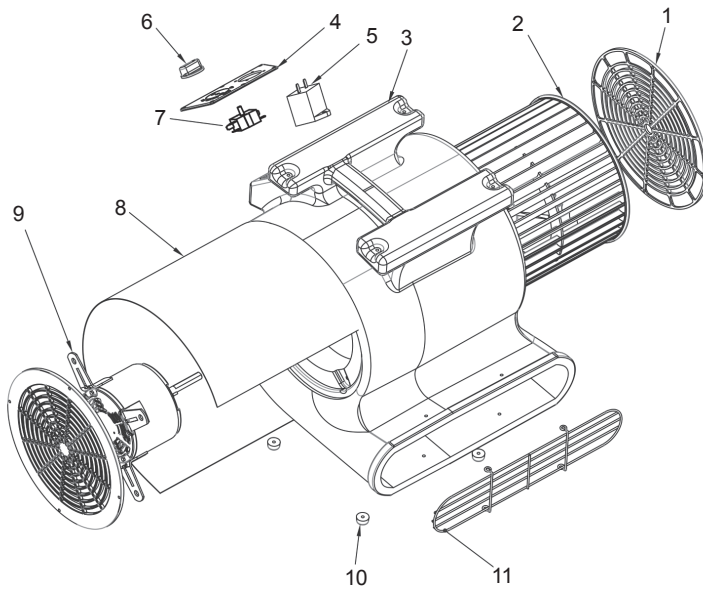

| Item      | Part #  | Description   | QTY |
|-----------|---------|---------------|-----|
| 1         | SA02-18 | Intake Grill  | 2   |
| 2         | SA02-03 | Fan Blade     | 1   |
| 3         | SA02-15 | Housing       | 1   |
| 4         | SA02-06 | Switch Plate  | 1   |
| 5         | SA02-09 | Capacitor     | 1   |
| 6         | SA02-05 | Switch Knob   | 1   |
| 7         | SA02-07 | Switch        | 1   |
| 8         | SA02-16 | Air Guide     | 1   |
| 9         | SA02-01 | Motor         | 1   |
| 10        | SA02-24 | Rubber Feet   | 4   |
| 11        | SA02-19 | Exhaust Grill | 1   |
| Not Shown | SA02-22 | Power Cord    | 1   |

### LIMITED MANUFACTURER'S WARRANTY

Intertex, LLC warrants that this product sold to the original user (the "User") shall be free from defects in material and workmanship as follows:

This limited warranty shall extend for 1 year for the entire Product and five (5) years on the Product housing. At the sole discretion of the manufacturer, the limited warranty may include replacement parts, labor for repair or replacement of the Product.

The User shall provide proof of purchase to establish coverage under this limited warranty.

This limited warranty shall not cover:

1. Useful filter life and replacement filters.
2. Damage due to failure to perform normal maintenance as outlined in the Instruction Manual.
3. Failures of the Product due to voltage conditions, blown fuses, open circuit breakers, or any other damages due to the inadequacy or interruption of electrical services.
4. Damage due to consumer misuse or failure to follow instructions or warnings, including but not limited to unauthorized alteration, improper servicing or operation outside the voltage and frequency limitations as stated on the unit rating plate.
5. Damage due to flooding, fires, lightning, freezing of residual water, corrosive environment, or other conditions.
6. Damage due to use of replacement parts not supplied by the manufacturer.
7. Shipping damage.

Further, the manufacturer does not warrant that the Product is merchantable or fit for any particular purpose. All other warranties, guaranties, or representations, express or implied, by operation of law or otherwise, are expressly disclaimed.

Returned Product for limited warranty service which is found by the manufacturer to be free from defect and to conform to specifications shall be held for a reasonable period of time (as determined in the sole discretion of the manufacturer) for the User's shipping instructions and payment.

The manufacturer shall not be liable under any circumstances for special, contingent, incidental or consequential damages, losses, damages, or expenses directly or indirectly arising from the use of the Product, including without limitation, warehousing, labor, handling and service charges, die, equipment, or machine breakage, lost profits or loss of good will.


Any replacement parts supplied under this limited warranty will be warranted for the balance of the Product's limited warranty.

For warranty information and assistance contact customer service at 877.800.2247 or email [support@bluedri.com](mailto:support@bluedri.com)

### Unit Specifications

|                            |                          |
|----------------------------|--------------------------|
| VOLTS                      | 115V                     |
| POWER                      | 1 HP                     |
| CYCLE                      | 60 Hz                    |
| MAX AIR VOLUME             | 4050 CFM                 |
| AMPS LOW/MEDIUM/HIGH/SPEED | 6/7/10 AMPS              |
| WEIGHT                     | 32.2 LBS                 |
| SIZE L/W/H                 | 19.1"L x 17.9"W x 18.3"H |
| SPEED                      | 3 SPEEDS                 |
| CORD LENGTH                | 15'                      |

Specifications are subject to change without notice.

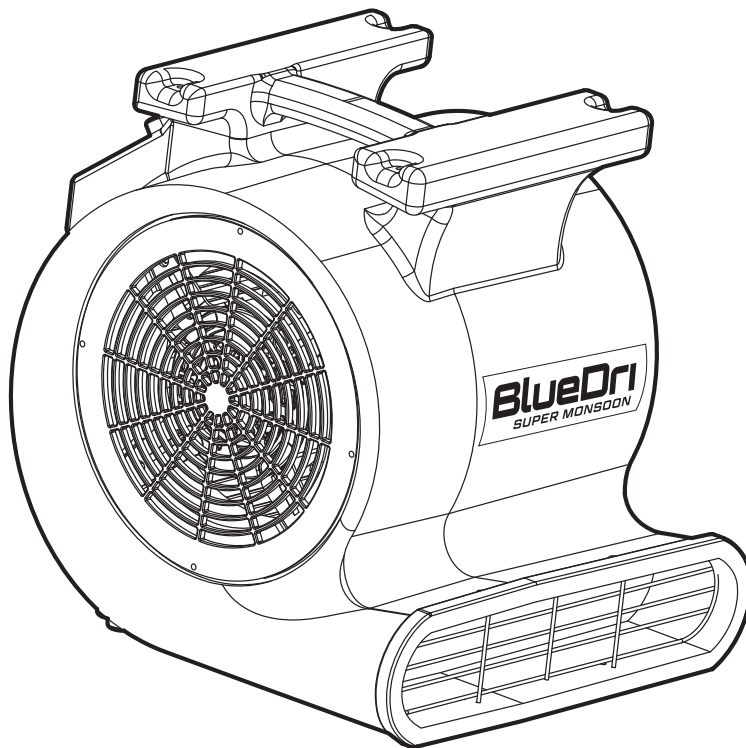

Owner's Manual | BD-SMNSN

# **BlueDri<sup>®</sup> COMMERCIAL AIR MOVER**

Intertex, LLC  
Lasko.com  
820 Lincoln Ave  
West Chester, PA 19380