

12 FLAT WASHER (M8) 8 PCS


13 ALLEN KEY 1 PC

14 ALLEN BOLT (M6X40) 5 PCS

15 WOOD SCREW (Ø8X30) 10 PCS


TOOL REQUIRED PHILLIPS
HEAD SCREW DRIVER
(NOT PROVIDED)

**16** | WOOD DOWEL (Ø10X30)





4 PCS



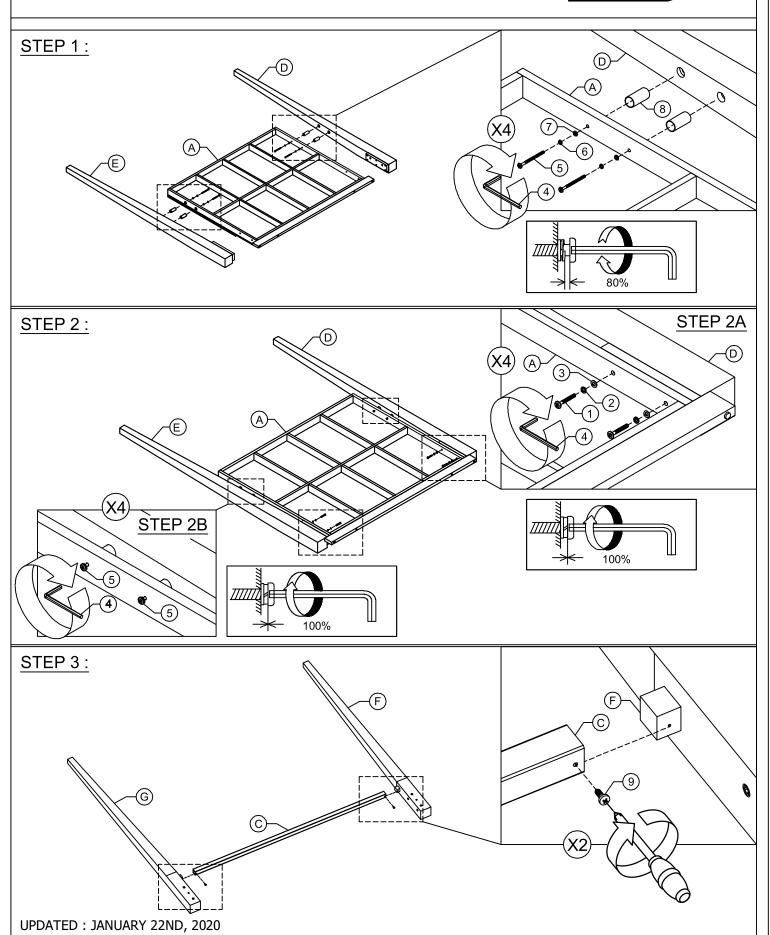



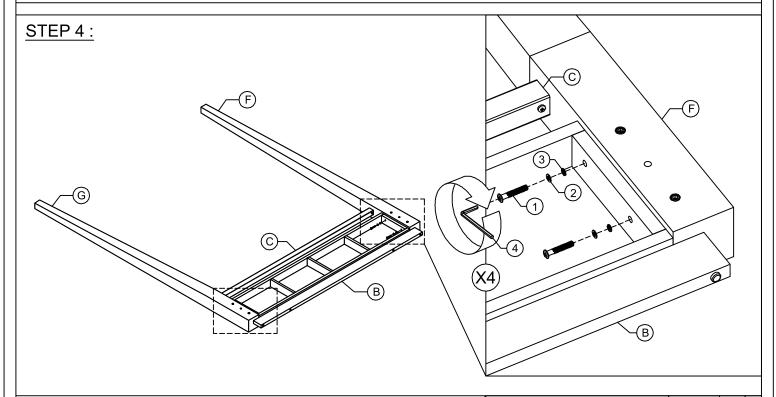

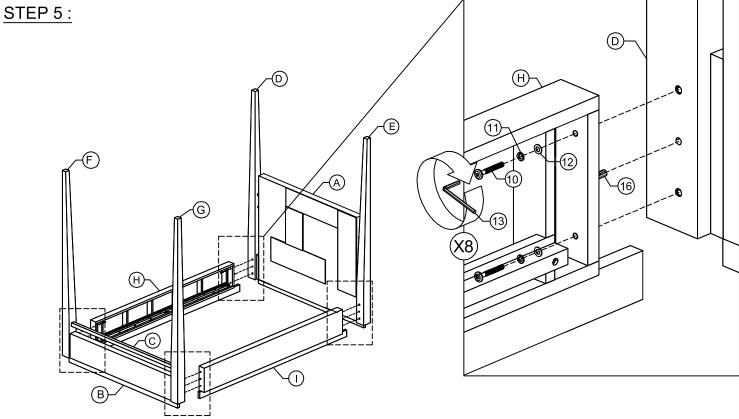





### **STOP**

- IF USING BED FRAME WITH ADJUSTABLE MATTRESS BASE, SKIP TO APPENDIX A: ADJUSTABLE MATTRESS BASE ASSEMBLY SUPPLEMENT.
- IF USING BED FRAME WITH STANDARD BOX SPRING OR FOUNDATION CONTINUE TO STEP 6.

UPDATED: JANUARY 22ND, 2020



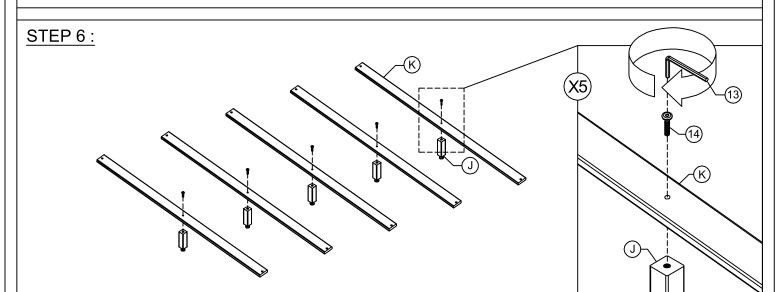

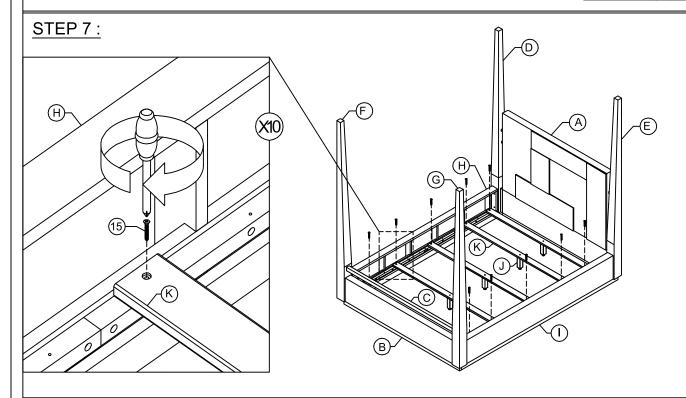

### INSTRUCTIONS FOR ADJUSTING LEVELER:

Position the bed in your space and locate the leveler under each slat support (J).


Turn the leveler counter-clockwise to extend the leveler and clockwise to retract it.

Adjust each leveler until each slat support is applying equal, upward pressure on the bed slat support.

UPDATED: JANUARY 22ND, 2020



- Remove box spring and mattress before moving your bed.
- Lift your bed when moving it.
   Dragging can damage the slat support.
- Readjust levelers after moving your bed.



### DESTINATION FULL / QUEEN POSTER BED

### APPENDIX A: ADJUSTABLE MATTRESS BASE ASSEMBLY SUPPLEMENT



AN ADJUSTABLE MATTRESS BASE IS A FREESTANDING MATTRESS SUPPORT THAT SITS WITHIN THE PERIMETER OF THE BED FRAME.

IF USING THIS BED FRAME WITH A STANDARD BOX SPRING OR FOUNDATION THESE INSTRUCTIONS DO NOT APPLY.


PRE-ASSEMBLED SIDE RAIL CLEATS OBSTRUCT ADJUSTABLE BASE INSTALLATION AND OPERATION. FOLLOW THESE INSTRUCTIONS TO REMOVE THEM.

### THE FOLLOWING PARTS ARE NOT REQUIRED FOR ADJUSTABLE MATTRESS BASE INSTALLATION:

J. SLAT SUPPORT 5 PCS 14. ALLEN BOLT M6X40MM 5 PCS K. BED SLAT 5 PCS 15. WOOD SCREW Ø8X30MM 10 PCS

### STEP 1:

USE ALLEN KEY (13) TO UNSCREW ALLEN BOLTS AND REMOVE PRE-ASSEMBLED SIDE RAIL CLEATS.

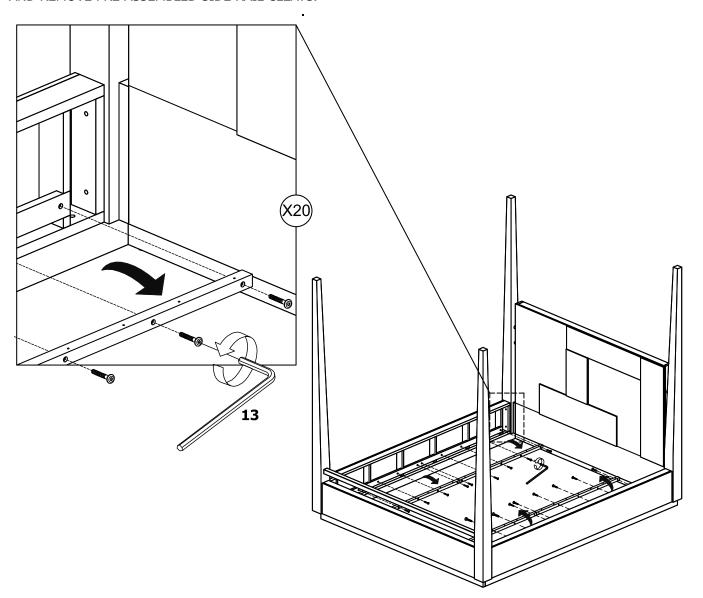

NOTE: YOU MAY WISH TO RETAIN UNUSED PARTS IF IN THE FUTURE YOU INTEND TO USE THE BED FRAME WITH A STANDARD BOX SPRING OR FOUNDATION.

UPDATED: JANUARY 22ND, 2020