

MVP

120V Puck Light

With robust light output and high CRI, this versatile dimmable accent lighting system can be used for task areas, display shelving, back bars, built-ins and more. The cETLus Listed system links easily for plug-in or hardwire applications. Build your own system with bulk pucks combined with either single pucks or three puck kits.

- Available in 2700K or 3000K color temperatures
- High color rendering (90+ CRI)
- 120V input - no driver required
- 30° adjustable swivel to direct light
- Recessed or surface mount design
- Low profile design - only 7/8" high
- Dimmable with most CL and ELV dimmers
- Direct hardwire or plug-in installation
- cETLus Listed for dry location • 50,000 hours rated life
- Surface or recess mount (2-3/8" cut-out); mounting screws included



MVP QUICK SPECS

VOLTAGE	120V AC, 60Hz
WATTAGE	4.3W per puck
LUMENS	200Lm (BK) / 200LM (NK) / 230Lm (WH) (2700K)
CCT	2700K / 3000K
CRI	90+
MAX RUN	20 pucks
DIMMING	10-100%* with most CFL/LED and low-voltage electronic
OPERATING TEMP	-10°C (14°F) to 40°C (104°F)
BEAM ANGLE	120°
LENS SWIVEL	30°
LED TYPE	6 x 2835 SMD LEDs
CERTIFICATIONS	cETLus Listed, dry locations
RATED LIFE	50,000 Hours

*Minimum loads may apply. Per the NEC, switched wall outlets cannot be used with wall dimmers.

PROJECT: _____


TYPE: _____

LOCATION: _____

CATALOG NUMBER: _____



MVP QUICK DIMENSIONS

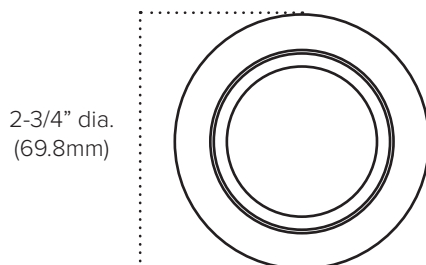

MVP ORDERING INFORMATION

ITEM NUMBER NAME	VOLTAGE	CCT	LUMENS	WATTAGE
MVP-3-WH 3-Puck Kit	120V	2700K	230Lm	4.3W
MVP-3-30-WH 3-Puck Kit	120V	3000K	230Lm	4.3W
MVP-1-WH Single Puck Kit	120V	2700K	230Lm	4.3W
MVP-1-30-WH Single Puck Kit	120V	3000K	230Lm	4.3W
MVP-1-WH-B Single Linking Puck	120V	2700K	230Lm	4.3W
MVP-1-30-WH-B Single Linking Puck	120V	3000K	230Lm	4.3W
MVP-3-NK 3-Puck Kit	120V	2700K	200Lm	4.3W
MVP-3-30-NK 3-Puck Kit	120V	3000K	200Lm	4.3W
MVP-1-NK Single Puck Kit	120V	2700K	200Lm	4.3W
MVP-1-30-NK Single Puck Kit	120V	3000K	200Lm	4.3W
MVP-1-NK-B Single Linking Puck	120V	2700K	200Lm	4.3W
MVP-1-30-NK-B Single Linking Puck	120V	3000K	200Lm	4.3W
MVP-3-BK 3-Puck Kit	120V	2700K	200Lm	4.3W
MVP-3-30-BK 3-Puck Kit	120V	3000K	200Lm	4.3W
MVP-1-BK Single Puck Kit	120V	2700K	200Lm	4.3W
MVP-1-30-BK Single Puck Kit	120V	3000K	200Lm	4.3W
MVP-1-BK-B Single Linking Puck	120V	2700K	200Lm	4.3W
MVP-1-30-BK-B Single Linking Puck	120V	3000K	200Lm	4.3W

Bulk Pucks Include: (1) Puck with 6" lead wire and 6" tail wire, Mounting screws

Single Puck Kits Include: (1) Puck with 6" lead wire, (1) 6' power cord with roll switch, Mounting screws

Three Puck Kits Include: (2) Pucks with 6" lead wire and 6" tail wire, (1) 6' power cord with roll switch, (1) Puck with 6" lead wire, Mounting screws

MVP ACCESSORIES

PART NUMBER	DESCRIPTION
ALLVP-PC6	6ft Black 120V Power Cable + Plug w/ Inline Rotary Switch
ALLVP-PC6-WH	6ft White 120V Power Cable + Plug w/ Inline Rotary Switch
ALLVPEX12	1ft Black Linking cable; 18AWG wire with male/female connectors
ALLVPEX24	2ft Black Linking cable; 18AWG wire with male/female connectors
ALLVPEX12WH	1ft White Linking cable; 18AWG wire with male/female connectors
ALLVPEX24WH	2ft White Linking cable; 18AWG wire with male/female connectors



ALLVP-PC6



ALLVP-PC6-WH



ALLVPEX BLACK



ALLVPEX WHITE

RECOMMENDED POWER SUPPLIES

PART NUMBER	DESCRIPTION	FINISH	APPLICATION	PRIMARY & SECONDARY	TOTAL WATTAGE	LISTING	DIMENSIONS
ALSBOX	Slimline Hardwire Box with (2) Molex outlets and On/Off switch; (Required for Hardwire operation)	Black	Dry location	120V AC	86 x 2 (5A Max)	cURus	4"x2.5"x1"
ALSBOX-WH-B		White	Dry location	120V AC	86 x 2 (5A Max)	cURus	4"x2.5"x1"
ALLVP-PC6	6ft power cord with slide on plug, roll switch, and female plug	Black	Dry location	120V AC	86	cULus	6ft length
ALLVP-PC6-WH		White	Dry location	120V AC	86	cULus	6ft length