


PROPANE FIRE PIT WITH GLASS SURROUND ATTACHMENT USER GUIDE

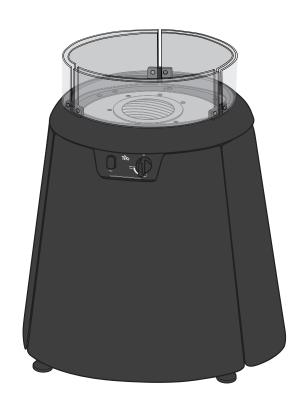

WARNING

INSTALLER: Leave this manual with the appliance. CONSUMER: Retain this manual for future reference.

WARNINGS

WARNING

FOR OUTDOOR USE ONLY.

Installation and service must be performed by a qualified installer, sevice agency or gas supplier.

WARNING

FOR YOUR SAFETY:

If the information in this manual is not followed exactly, a fire or explosion may result causing property damage, personal injurty or loss of life. WHAT TO DO IF YOU SMELL GAS:

- · Do NOT try lighting any appliance.
- Do NOT touch any electrical switch; do NOT use any phone in your building.
- · Immediately call your gas supplier from a neighbor's phone.
- · Follow the gas supplier's instructions.
- · If you cannot reach your gas supplier, call the fire department.

Do NOT use for cooking.

WARNING

FOR YOUR SAFETY:

Improper installation, adjustment, alteration, service or maintenance can cause injury or property damage.

Read the installation, operation and maintenance instructions thoroughly before installing or servicing this equipment.

DANGER

Do NOT leave this appliance unattended while it is in operation.

DANGER

FIRE OR EXPLOSION HAZARD

If you smell gas:

- · Shut off gas to appliance.
- · Extinguish any open flame.
- · If odor continues, leave the area immediately.
- · After leaving the area, call your gas supplier or fire department.

Failure to follow these instructions could result in fire or explosion, which could cause property damage, personal injury, or death.

WARNING

FOR YOUR SAFETY:

- 1. Do not store or use gasoline, or other flammable vapors and liquids, in the vicinity of this or any other appliance.
- 2. An LP-cylinder not connected for use shall not be stored in the vicinity of this or any other appliance.

DANGER

CARBON MONOXIDE HAZARD

This appliance can produce carbon monoxide which has no odor.



Using it in an enclosed space can kill you. Never use this appliance in an enclosed space such as a camper, tent, car or home.

WARNINGS



Note: If using tabletop accessory (sold separtely), with glass surround, follow assembly instructions and warnings found in the user guides accompanying each accessory.

TABLE OF CONTENTS

Warnings
Parts List
Assembly Instructions 5
Care & Maintenance
Limited Warranty10

The use and installation of this product must conform to local codes. In absence of local codes, use the latest edition of the National Fuel Gas Code, ANSI Z223.1/NFPA 54; Natural Gas and Propane Installation Code, CSA B149.1; or Propane Storage and Handling Code, CSA B149.2, as applicable.

PARTS LIST

Compare all parts with the Package Contents and Hardware Included lists. If any part appears missing or damaged, DO NOT assemble or use this product. DO NOT RETURN TO PLACE OF PURCHASE. For assistance, contact Customer Service at 1-888-473-1088.


Please have your owner's manual and model number available for reference.


Note: The model number is printed on the rating label which can be found on the inside of the door panel.

Part	Description Quan	Quantity	
6005604	Inner Glass Panes	3	
6005605	Outer Glass Panes	3	
6006018	Bottom Bracket Assembly	3	
6006026	M6 Torx Head Bolts (Preassembled in each Bottom Bracket Assembly)	12	
6006017	Silicon Washers (Preassembled in each Bottom Bracket Assembly)	12	
6004700	4mm Hex Key	1	

Note: Items not shown to actual scale or size

▲ **WARNING:** CHOKING HAZARD – Small parts. Not for children under 3 years.



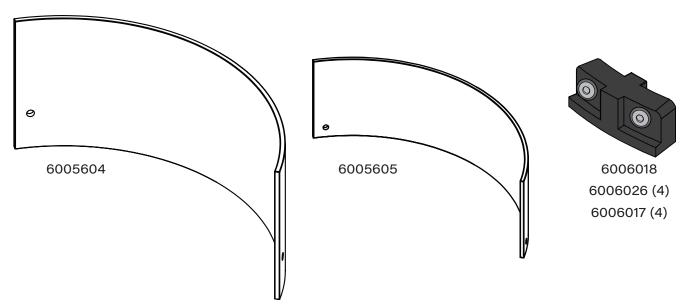

4 TIKI Brand | Propane Fire Pit Glass Surround User Guide

WARNING

FAILURE TO POSITION THE PARTS IN ACCORDANCE WITH THESE DIAGRAMS OR FAILURE TO USE ONLY PARTS SPECIFICALLY APPROVED WITH THIS APPLIANCE MAY RESULT IN PROPERTY DAMAGE OR PERSONAL INJURY.

Assembly Tips:

- · Choose an area where you will assemble the product. To protect components, choose a smooth, flat surface that is free of cracks or openings.
- · Spread out all parts.
- · Loosely tighten all hardware connections first. Fully tighten hardware in the steps instructed as adjustment may be necessary prior to fully tightening. Be careful not to over-tighten. Over-tightening hardware could damage or strip threads.
- · For best results, complete each step in the order as shown in this manual.

CAUTION

To avoid scratches or other damage to the unit, choose a smooth, flat surface for assembling the unit.

CAUTION

Before installing or removing the glass surround, make sure the fire pit is off and LP gas tank valve is closed. Wait 1 hour before removing the tabletop assembly.


- · The Glass Surround Attachment should only be used with the TIKI® Brand Propane Fire Pit only.
- \cdot Refer to User Guide for the Propane Fire Pit for additional instructions.

STEP 1

Take the 3 brackets (6006018) and remove (4) bolts (6006026) and (4) washers (6006017) from each. Then flip each bracket upside down so that the bottom feet are on top.


STEP 2

Position (2) inner glass panes (6005604), upright on their top edge carefully. Note: The holes should be closer to the top. Align the outside edges. Tighten (2) bolts (6006026) thru the washers (6006017) and inner glass panel mounting holes and secure onto the bracket assembly (6006018). Note: The lip of the bracket should face outwards.

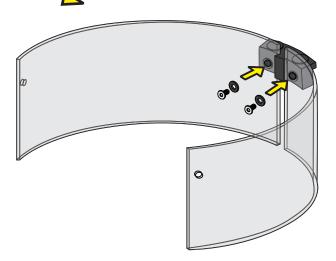


STEP 3

Position the third inner glass pane upright to complete the inner circle. Repeat Step 2 with the (2) remaining brackets, (4) bolts and (4) washers.

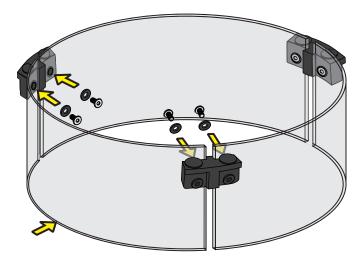


STEP 4

Position (1) outer glass pane (6005605), so that the holes line up with the brackets and the glass pane sits beneath the lip of the bracket (6006018). Tighten (2) bolts (6006026) thru washers (6006017) and outer glass panel mounting holes and secure onto one hole in each of the brackets.

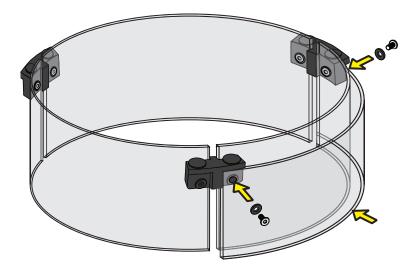

STEP 5


Repeat Step 4 with the (2) remaining outer glass panes and (4) bolts and (4) washers.

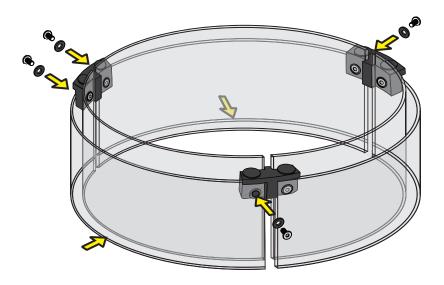

STEP 6

Flip assembled glass surround over and align on the propane base. The glass surround can be used with or without the Tabletop accessory (sold separately).

Note: Assemble tabletop accessory before placing glass surround on unit.

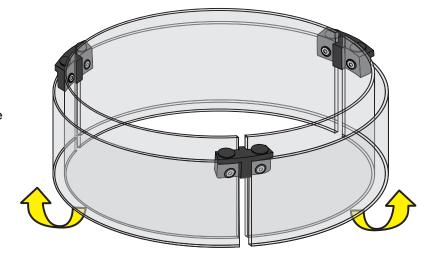





CARE & MAINTENANCE

Before Each Use:

- · Keep outdoor fire pit area clear and free from any combustible materials, gasoline and other flammable vapors and liquids.
- · Do NOT obstruct the flow of the combustion of LP gas and/or the ventilation air.
- · Keep the ventilation openings of the LP gas tank area free and clear from debris.
- · Visually check the burner flames to make sure your appliance is working properly.
- · Check all gas connections for leaks.
- · Check components for any signs of damage or rust.
- · Check for obstructions of airflow to the burner. Spiders, insects and webs can clog the burner/venturi tube. A clogged burner/venturi tube can lead to a fire.
- · If damage to any component is detected, do NOT operate until repairs are completed.

Before Storing:

- · Clean all surfaces
- · If storing the outdoor fire pit indoors, cover the appliance and store in a cool dry location away from children and pets.
- · If storing the appliance outdoors, cover fire pit with a weather cover for protection from the elements.
- · Store appliance upright in an area sheltered from direct contact with inclement weather such as rain, sleet, hail, snow, dust, debris and high winds.
- · Place the protective cap on the LP tank outlet and store the tank outdoors in a well-ventilated area out of direct sunlight.

CAUTION

All cleaning and maintenance should be done when outdoor fire pit is cool and with the fuel tank safely disconnected.

Do NOT clean any components of this appliance in a self-cleaning oven. The extreme heat will damage the finish.

Do NOT enlarge valve orifices or burner ports when cleaning the valves or burners.

WARNING

All cleaning should be done when the appliance is cool and with the fuel tank disconnected per instructions found in 'Disconnecting LP Gas Tank' (see User Guide for the Propane Fire Pit).

Note: When necessary, clean glass with a soft cloth and warm soapy water. Wipe dry.

LIMITED WARRANTY

Visit TIKIBrand.com/customer-service/our-guarantee or contact us at 1-888-473-1088 for more information.

For information on patents go to TIKIBrand.com/patents



This product and combustion products emitted when this product is burning can expose you to chemicals including carbon monoxide which is known to the State of California to cause birth defects or other reproductive harm, and lead which is known to the State of California to cause Cancer and birth defects or other reproductive harm. For more information go to www.P65warnings.ca.gov.

Specifications:

- · Certifications: ANS Z21.97 * CSA 2.41-2017
- · Normal Hourly Input Rating: 40,000 BTU/hr. (11.7kW)
- · Fuel: Liquid Propane Gas
- · Tank Size: Nominal 20 lb.
- · Manifold Pressure: 11.0 in W.C.
- · Safety Features: 100% Burner shut-off / Thermocouple / Tip Angle Switch
- · Manufacturer: Lamplight Farms Incorporated
- · Made In: China

Questions, problems, missing part? Call 1-888-473-1088.

TIKIBrand.com

Retain this manual for future use.



TIKIBRAND.COM

4002329 REV2

©2024 Lamplight Farms Incorporated