

240103

INSTALLATION INSTRUCTIONS

Please read carefully and save these instructions as you may need them a later date.

CAUTION

WARNING: Risk of Fire. Consult a qualified electrician to ensure correct branch circuit conductor.
Turn off the main power at the circuit breaker before installing the fixture in order to prevent possible shock.

GENERAL


All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustration.

ASSEMBLY AND INSTALLATION

1. Unscrew the canopy screws (8) using a screwdriver (not included) from the canopy (7) to detach the mounting plate (4).
2. Attach the mounting plate (4) with box screws (5) to the outlet box.
3. Place the decorative ring (2) onto the fixture assembly (1).
4. **FOR PENDANT USE:** Thread the stems (13) onto the fixture assembly (1) and the swivel joint (3) of the canopy (7).
5. **FOR CEILING USE:** Thread the swivel joint (3) of the canopy (7) onto the fixture assembly (1).
6. Install the shade (10) onto the fixture assembly (1), and secure with the shade nuts (11).
7. Make wire connections with wire nut (6).
 - Connect the white wire (Neutral wire) from the light to the white wire from power source.
 - Connect the black wire (Live wire) from the light to the black wire from power source.
 - Wrap the grounding wire (green wire or bare copper wire) from the light around the green screw on the mounting plate (4), then connect it to the grounding conductor from power source.
8. Attach the fixture to the outlet box, secure it with the canopy screws (8) using a screwdriver (not included).
9. Install 60W Max B10 bulbs (bulbs not included).
(Don't exceed the maximum capacity recommended on the sockets).

FOR PENDANT USE:

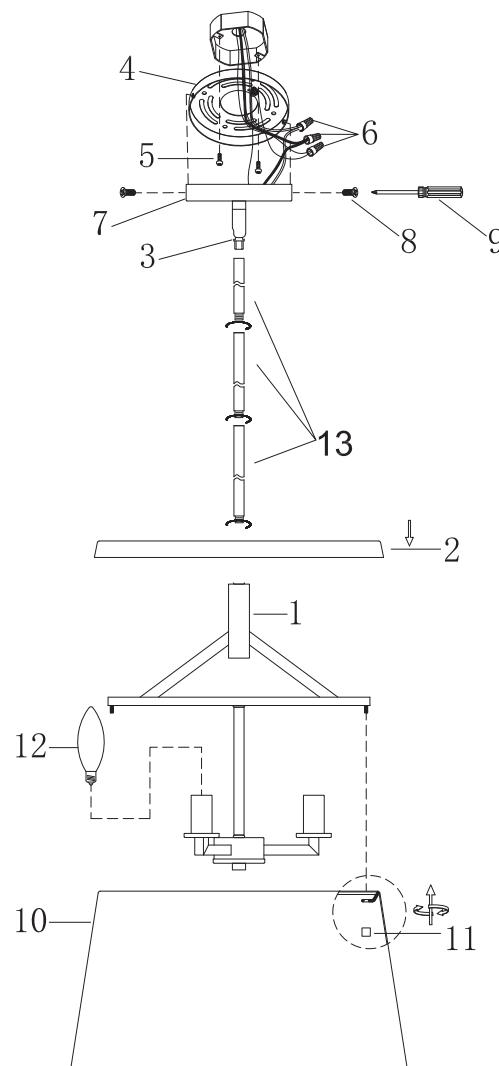

FOR CEILING USE:

