

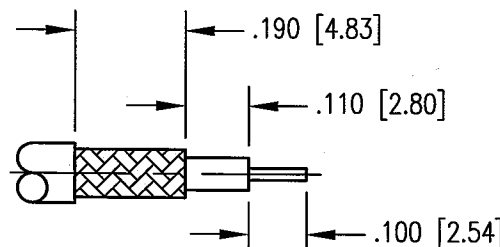


DWG. NO.		351-975-1160H		
REV	DESCRIPTION	BY	DATE	APPD
C	RELEASE PER ECR 7395		6/24/02	JWH

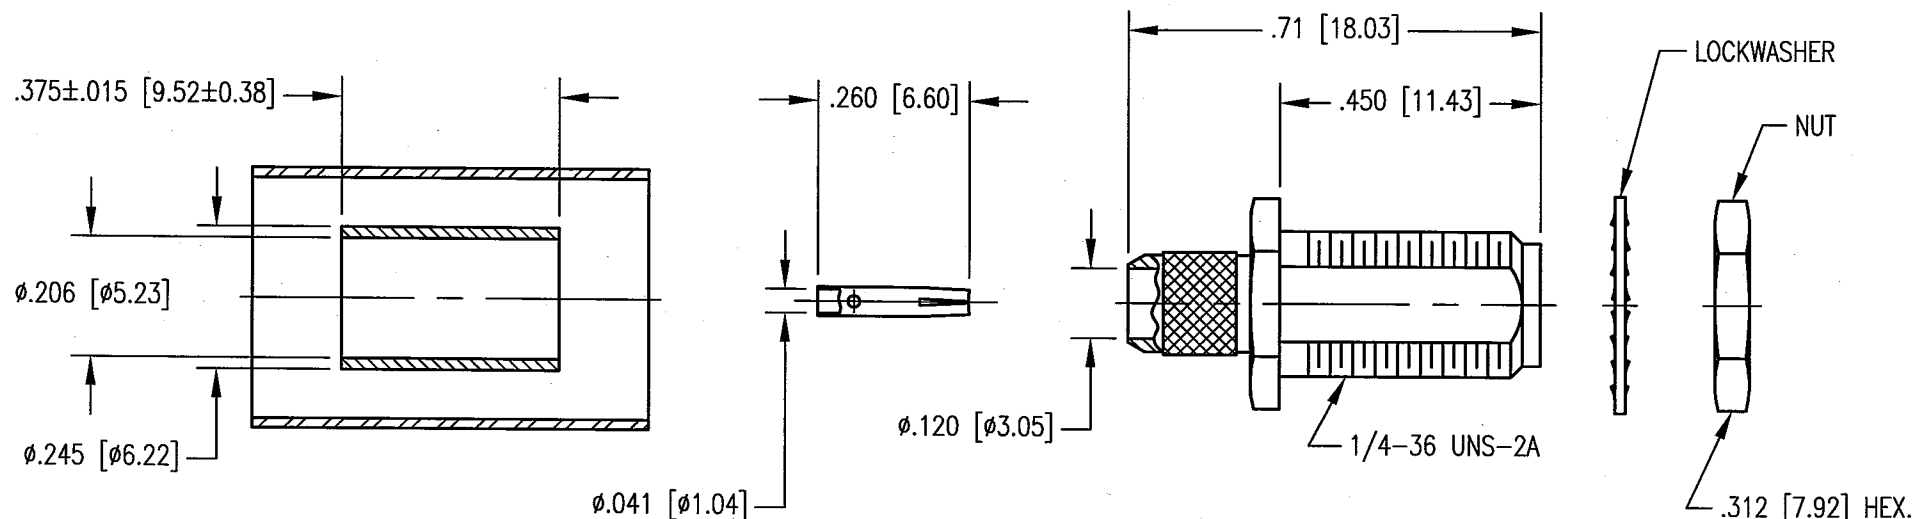

CABLE TRIMMING DIMENSIONS

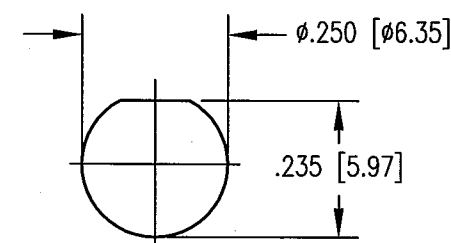

RECOMMENDED MOUNTING HOLE

NOTES:

1. MATERIALS:

INSULATOR: TEFLON PER ASTM D1710
 HEAT SHRINK TUBING: POLYOLEFIN
 CONTACT: COPPER ALLOY
 ALL OTHER METAL PARTS: BRASS PER ASTM B16

2. FINISH:

BODY: .000015 MIN. GOLD PER MIL-G-45204 OVER
 .000050 MIN. NICKEL PER QQ-N-290
 CONTACT: .000030 MIN. GOLD PER MIL-G-45204 OVER
 .000050 MIN. NICKEL PER QQ-N-290
 LOCKWASHER, NUT AND FERRULE: .000005 MIN. GOLD PER MIL-G-45204 OVER
 .000050 MIN. NICKEL PER QQ-N-290

3. FOR USE WITH RG-58 CABLE OR EQUIVALENT.

4. FOR CABLING PROCEDURES USE CAP 9-04 WITH TRIMMING DIMENSIONS SHOWN.

5. CRIMP FERRULE USING .213 HEX DIE.

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES [MM]		NORTHROP GRUMMAN	
TOLERANCES: DECIMALS .XX $\pm$.01 [0.254] XXX $\pm$.005 [0.127] ANGLES $\pm$ 2°		Winchester Electronics 400 Park Road Watertown, CT 06795	
CUSTOMER DRAWING		TITLE SMA STRAIGHT BULKHEAD JACK	
DRAWN JWH	DATE 6/24/02	CHECKED JWH	DATE 6/24/02
APPROVED JWH	DATE 6/24/02	APPROVED JWH	DATE 6/24/02
A 351-975-1160H		SHT. 1	OF 1
		REV. C	