

INSTALLATION INSTRUCTIONS

Please read carefully and save these instructions as you may need them a later date

CAUTION

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.

GENERAL

All electrical connections must be in accordance with local and National Electrical Code(N.E.C.) standards.If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustration.

ASSEMBLY AND INSTALLATION

1. Screw bottom of long threaded rod (N) onto top of fixture body (O).Lower center tube (M) down over long threaded rod (N). Lower center tube cap (L) down onto top of center tube (M).Slide spacer (K) over end of threaded rod (N) protruding from top of center tube (M). Thread nut (J) onto long threaded rod (N) protruding from top of spacer (K). Tighten nut (J) up against spacer (K). Push fixture wires through stem (I/H/R). Screw stem (I/H/R) onto nut (J). Determine desired hanging height of fixture. Select the quantity of stems (I/H/R) to achieve that height. Push fixture wires up through loop (F). Screw loop (F) onto end of last stem (I/H/R). Push fixture wires up through hole in center of canopy (D). Use locking link (G) to connect loop (F) and loop on canopy (D).**Note: Pull fixture wires taut.**

2. Carefully pull house wires through center hole in mounting bracket (A).Secure mounting plate (A) to junction box with junction box screw (B)

3. Pull out the outlet wire and ground wire from junction box.

Make wire connections with wire nut .

--Ribbed wire (w/o marking) or white wire from light to White wire from power source.

--Smooth wire (w marking) or black wire from light to Black wire from power source.


--Attach the ground wire to mounting bracket (A) with a ground screw.

4. Carefully raise fixture up to ceiling. Place canopy(D) of fixture over mounting bracket (A). Pass fixture mounting screws (E) through the holes on canopy(D). Screw one threaded cap (C) onto each fixture mounting screw (E).Tighten threaded caps(C) to secure fixture to ceiling. Place one socket cover cap (P) on top of each socket cover(Q).


5. Screw recommended bulb (E12 Candelabra bulb type, not included) into socket. Verify correct bulb wattage marked on socket of fixture. **WARNING: DO NOT exceed maximum bulb wattage**

6. Turn on the power

INSTALLATION IS NOW COMPLETED

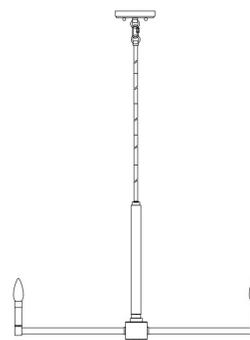


99702

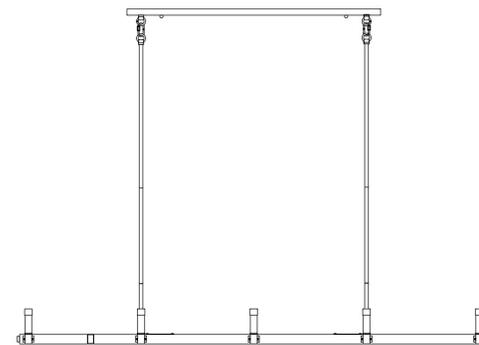

99701

- A. Mounting bracket
- B. Junction box screw
- C. Threaded cap
- D. Canopy
- E. Mounting screw
- F. Loop
- G. Locking link
- H. 12 inch stem
- I. 6 inch stem
- J. Nut
- K. Spacer
- L. Center tube cap
- M. Center tube
- N. Threaded rod
- O. Fixture body
- P. Socket cover cap
- Q. Socket cover
- R. 18 inch stem

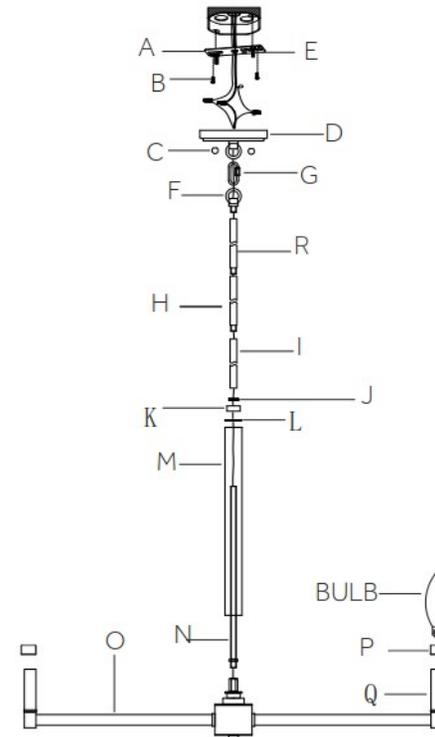

Item No.: 99701, 99702