


2-OUTLET SURGE PROTECTOR (2 AC & 3 USB PORTS)

P205UC

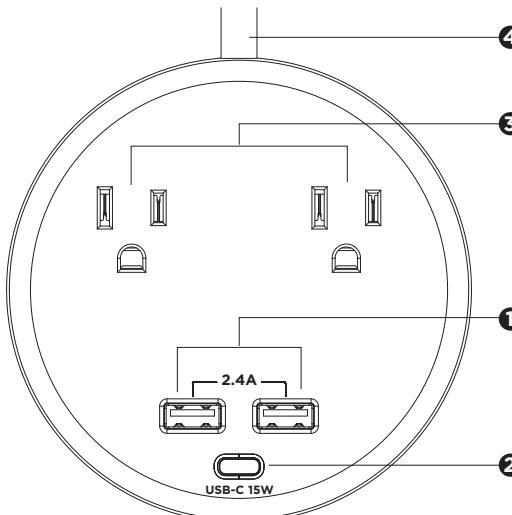

FEATURES

1. USB-A Charging Ports (2)
2. USB-C Charging Port (1)
3. Standard Grounded Outlets (2)
4. Power Cord

SPECIFICATIONS

Model Number:	P205UC
Outlets:	Standard Grounded Outlets (2), USB-A Charging Ports (2), USB-C Charging Port (1)
Power Cord Length:	5 ft
Surge Protection:	500 Joules
USB Charging Output:	USB-A 2.4 A Shared, USB-C 15 W Max
Electrical Rating:	125 V/13 A/60 Hz/1625 W
UL Clamping Voltage:	UL1449 4th/800 V (L-N)
Maximum Peak Current:	15000A
AC Lines Protected:	L-N: 15000 A
Response Time:	Less than 1 nanosecond
Circuit Breaker:	Resettable 15 Amp

WARNING: This product can expose you to chemicals including bisphenol A (BPA) and styrene (ABS), which is known to the State of California to cause reproductive harm and cancer. For more information, go to www.P65Warnings.ca.gov.

CAUTION

TO REDUCE THE RISK OF ELECTRIC SHOCK:

Use only in dry locations and only indoors.
DO NOT plug into another relocatable power tap.
DO NOT "daisy chain" surge protectors.
DO NOT use with any aquarium equipment.
DO NOT use if properly grounded outlets are not available.
DO NOT install this device if there is less than 10 meters (30 feet) of wire between the electrical outlet and electrical service panel.
DO NOT use for medical or life support equipment. This device features an internal protection that will disconnect the surge protective component at the end of its useful life, but it will maintain unprotected power to the load.

FOR MORE INFORMATION

Visit CyberPowerSystems.com for more information regarding:

- Product information and certifications
- Product warranty
- Connected equipment guarantee



CONFORMANCE APPROVALS

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against

TECHNICAL SUPPORT

Visit: CyberPowerSystems.com/support

Toll-Free: 1-877-297-6937

Hours of Operation: Monday - Friday: 7:00am - 6:00pm CST

© 2022 Cyber Power Systems (USA), Inc. All rights reserved.
 All other trademarks are the property of their respective owners.

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

WARNING: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.