

4528

INSTALLATION INSTRUCTIONS

Please read carefully and save these instructions, as you may need them at a later date.

CAUTION

WARNING: Risk of Fire. Consult a qualified electrician to ensure correct branch circuit conductor.

Turn off the main power at the circuit breaker before installing the fixture in order to prevent possible shock.


GENERAL

All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustration.

ASSEMBLY AND INSTALLATION

1. Run the wire through the loop (15) to install onto fixture (16), Install the other top loop (15) to the other side. (See drawing).
2. Attach both chains to the top ring of the body with open rings (12). Attach chain to the loops on the canopy (11) through the open rings (12). Close the open rings.
3. Attach mounting bar (6) with threaded nipple (10) and screw collar loop (12) and lock ring (14) to outlet box (1) secured with two box screws (9).
4. Pull out the outlet wire and ground wire from the outlet box (1)
5. Make wire connections with wire nuts (5).
--Ribbed wire (W/O marking) or white wire from light to White wire (2) from power source.
--Smooth wire (W marking) or black wire from light to Black wire (3) from power source.
--Attach the ground wire (4) to mounting bar (6) with a ground screw (7).
6. Push fixture to ceiling, carefully passing threaded pipe through hole. Tighten fixture to ceiling with finial.
7. Install bulbs to socket (17): (bulbs not included).
(Don't exceed the maximum capacity recommended on the sockets).

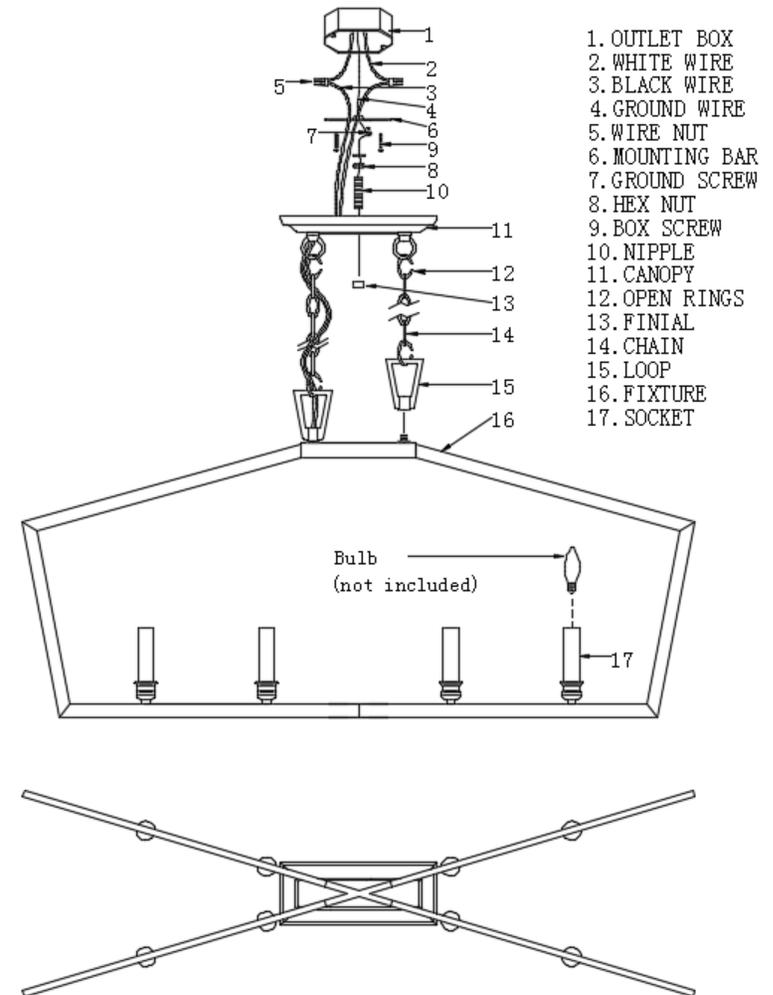

INSTALLATION IS NOW COMPLETED