

88 5053 76


Shelf

IMPORTANT NOTE

Carefully remove all the parts from the carton and put them individually on a soft cloth to prevent scratches or other damage occurring to the parts.

We have taken great care in the design of this product and request that you carefully and strictly follow our assembly instructions to ensure a completed product as it was designed.

Home Styles

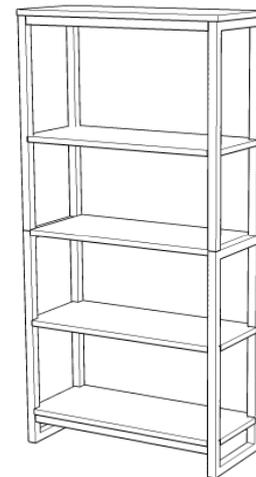

Part List



A.
Top
1 Pc.




B.
Shelf
1 Pc.



C.
Shelf
1 Pc.




D.
Shelf
2 Pcs.

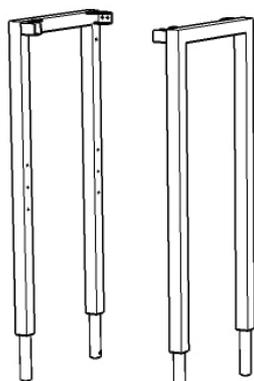


E.
Side Frame
1 Pc.

F.
Side Frame
1 Pc.

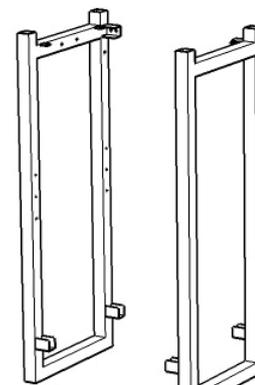


G.
Side Frame
1 Pc.

H.
Side Frame
1 Pc.




I.
Back Stretcher
2 Pcs.



J.
Front Stretcher
1 Pc.



K.
Stretcher
1 Pc.



L.
Stretcher
2 Pcs.


Hardware List




Hex Wrench
1 Pc.



Small Hex Wrench
1 Pc.



M6x16
Head Cap Bolt
41 Pcs. (+1 extra)



M6x16
Tapered
Head Cap Bolt
6 Pcs. (+1 extra)



Spring Washer
41 Pcs. (+1 extra)



Flat Washer
41 Pcs. (+1 extra)



Adjustable Pin
8 Pcs. (+1 extra)

Tools recommended for assembly : Level

Home Styles Consumer Assistance: www.homestyles-furniture.com,
servicedesk@homestyles-furniture.com, 888-680-7460, 877-831-0319

Assembly Instructions 2/3

IMPORTANT

- * Please keep Hex Wrench in a safe place as you may need to tighten up the Head Cap Bolts in the future.
- * Do not tighten up all the bolts until each part is properly assembled.
- * Use a soft cloth between these parts and the floor.
- * After assembly item must be level to work properly. Use the included adjustable levelers to level.

STEP 1

Attach Back Stretcher (I), Stretcher (K) and Stretchers (L) to Side Frame (G) with Head Cap Bolts, Spring Washers, Flat Washers and Tapered Head Cap Bolt. (See Figure 1)

Attach Side Frame (H) to unit with Head Cap Bolts, Spring Washers, Flat Washers and Tapered Head Cap Bolt.


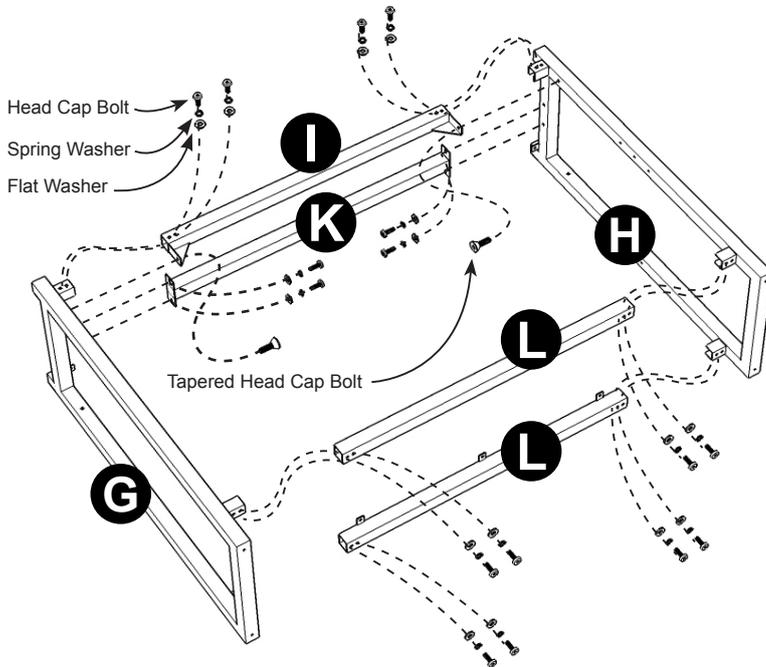


Figure 1

STEP 2

Attach Back Stretcher (I) and Stretcher (J) to Side Frame (E) with Head Cap Bolt, Spring Washers, Flat Washers and Tapered Head Cap Bolt. (See Figure 2)

Attach Side Frame (F) to unit with Head Cap Bolts, Spring Washers, Flat Washers and Tapered Head Cap Bolt.






Figure 2



STEP 3

Attach unit from Step 2 to unit from Step 1 with Tapered Head Cap Bolts.

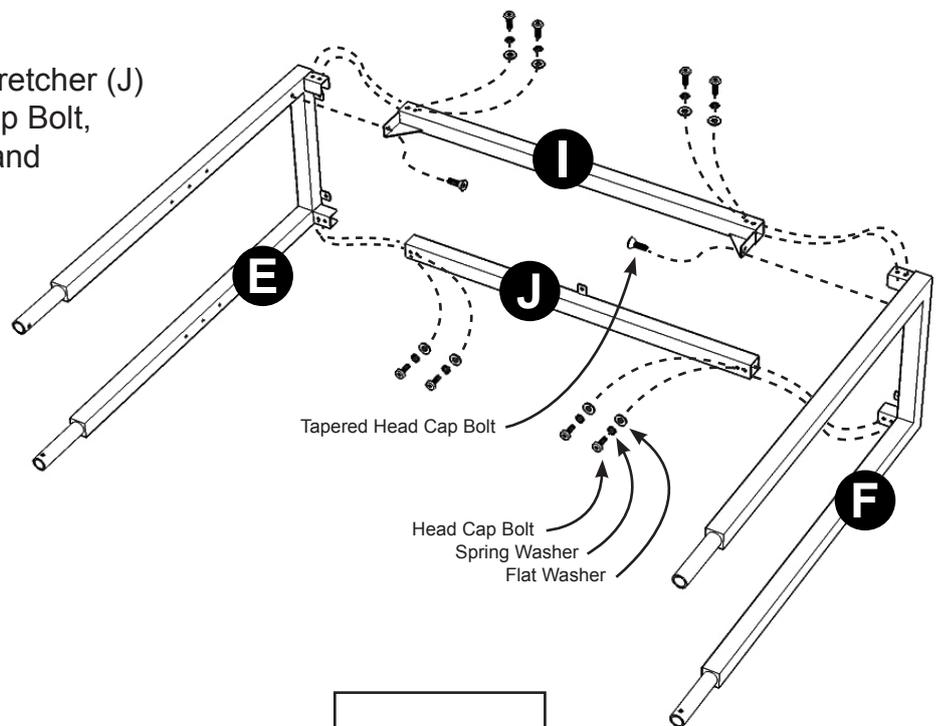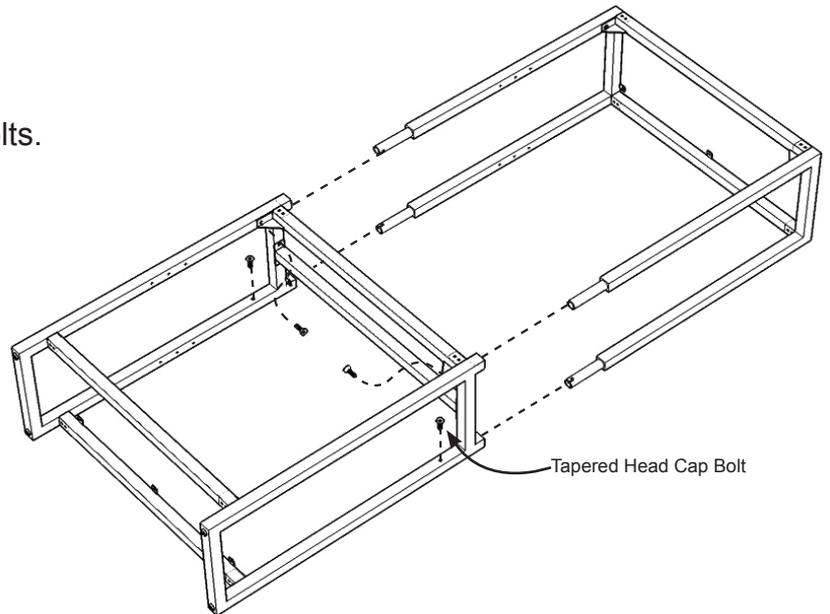

STEP 4

Attach Top (A), Shelves (B) and (C) with Head Cap Bolts, Spring Washers and Flat Washers.

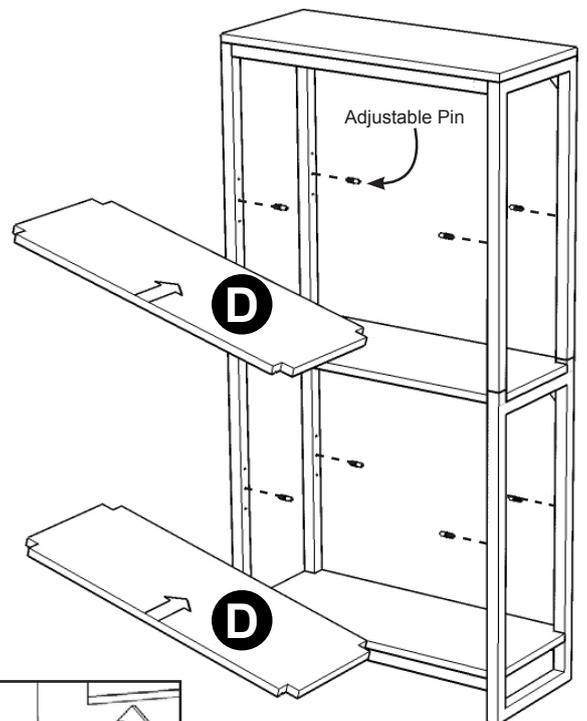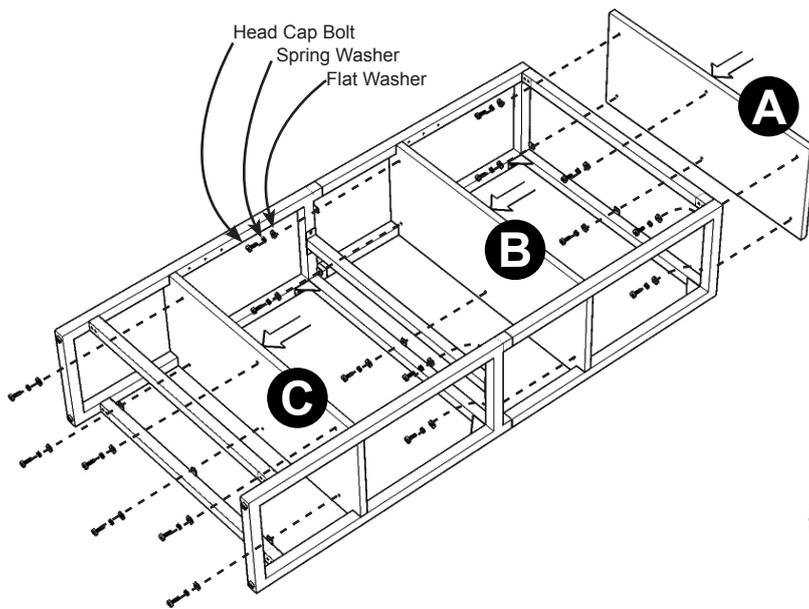

STEP 5

Turn the unit to its' upright position.

Insert Adjustable Pins into side frame unit at desired level.

Place Shelves (D) into position.

To level the unit, adjustable levelers on the bottom of unit.

Note: Unit must be level to work properly.




Figure 3