



SPECIFICATION SUBMITTAL SHEET

j o n e s s t e p h e n s c o r p o r a t i o n

DIELECTRIC UNION

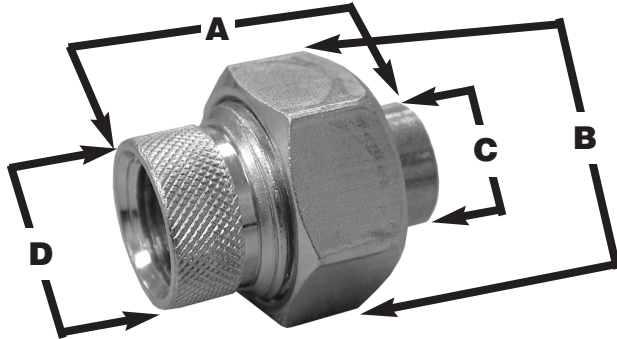

FEMALE x SWEAT

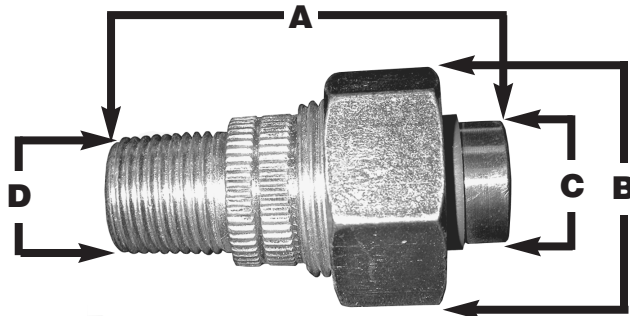

MALE x SWEAT

features and benefits:

- Lead Free
- Prevents electrolysis or galvanic action when connecting dissimilar metals
- Residential or commercial use
- Zinc plated forged steel
- Solder ends conform to ANSI B16.19
- EPDM washer, ABS fiber sleeve
- Threads conform to ANSI B2.1
- Pressure rated at 250 psi at 180°F

This product and others like it can be found in the Jones Stephens catalog. Call today to order your catalog or download it from our website: www.plumbest.com

| PART NO. | FIP x COPPER SWEAT | OD | A | B | C | D |
|----------------------------------|--------------------|--------|----------|---------|----------|---------|
| FEMALE x SWEAT | | | | | | |
| <input type="checkbox"/> D06-050 | 1/2" x 1/2" | 5/8" | 1 7/8" | 1 7/16" | 7/8" | 1" |
| <input type="checkbox"/> D06-075 | 3/4" x 3/4" | 7/8" | 2" | 1 5/8" | 1 1/16" | 1 1/4" |
| <input type="checkbox"/> D06-100 | 1" x 1" | 1 1/8" | 2 1/4" | 1 7/8" | 1 5/16" | 1 1/2" |
| <input type="checkbox"/> D06-125 | 1 1/4" x 1 1/4" | 1 3/8" | 2 1/2" | 2 3/16" | 1 9/16" | 1 7/8" |
| <input type="checkbox"/> D06-150 | 1 1/2" x 1 1/2" | 1 5/8" | 2 5/8" | 2 3/4" | 1 13/16" | 2 1/8" |
| <input type="checkbox"/> D06-200 | 2" x 2" | 2 1/8" | 2 7/8" | 3 1/2" | 2 3/8" | 2 3/4" |
| REDUCING | | | | | | |
| <input type="checkbox"/> D06-350 | 3/4" x 1/2" | 5/8" | 1 7/8" | 1 5/8" | 13/16" | 1 1/4" |
| MALE x SWEAT | | | | | | |
| <input type="checkbox"/> D06-005 | 1/2" x 1/2" | 7/8" | 2 3/4" | 1 3/8" | 5/16" | 1 1/16" |
| <input type="checkbox"/> D06-750 | 3/4" x 3/4" | 7/8" | 2 7/8" | 1 1/2" | 1 1/16" | 1" |
| REDUCING | | | | | | |
| <input type="checkbox"/> D06-755 | 3/4" x 1/2" | 5/8" | 2 13/16" | 1 5/8" | 13/16" | 1" |

jones stephens corporation
 3249 moody parkway • moody, alabama 35004
 toll free phone: 1-800-355-6637 • toll free fax: 1-800-462-6991
www.plumbest.com