

## ASSEMBLY&INSTALLATION

Please read carefully and save these instructions, as you may need them a later date.

### CAUTION

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.

### GENERAL


All electrical connections must be in accordance with local and National Electrical Cod (N.E.C) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

## ASSEMBLY AND INSTALLATION

1. Carefully unpack the fixture, lay out all parts on a clean surface.
2. Secure the mounting plate (9) to outlet box (1) with the outlet box screws (13). Thread the hex nut (11) onto the nipple (12) so that five threads are exposed above the hex nut (11). Insert the lock washer (10) and thread the nipple (12) into the mounting plate (9), then secure with the hex nut (11). Thread the screw collar (15) onto the nipple (12).
3. Use one quick link (19) to connect fixture loop (20) and bottom of chain (18). slide the collar ring (16) and the canopy (14) over the chain (18), then use another quick link (17) to connect screw collar (15) at the top of chain (18).  
**BE SURE TO CLOSE ALL CHAIN LINK COMPLETELY**
4. Lace wires up through chain (18) and pass wires through hole in screw collar (15). We recommend lacing wire up through every other link of chain (18)
5. Make wire connections with wire connector (2):
  - The lead wire (smooth) (3) from fixture to black wire (4 live wire) from the outlet box.
  - The neutral wire (ribbed) (5) from fixture to white wire (6 neutral wire) from the outlet box.
  - Attach the fixture ground wire (7) and supply ground wire (8) to the mounting plate with the green ground screw. Carefully tuck wire back into the outlet box.
6. Raise the canopy (14) on the ceiling and secure collar ring (16).
7. Slip the glass shade (22) and cap (23) over the socket (21), and secure with the socket ring (24).
8. Install the bulb (not included) into the socket. Make sure they do not exceed the maximum wattage specified on the fixture's wattage label.
9. Turn on the power.

## INSTALLATION IS NOW COMPLETED

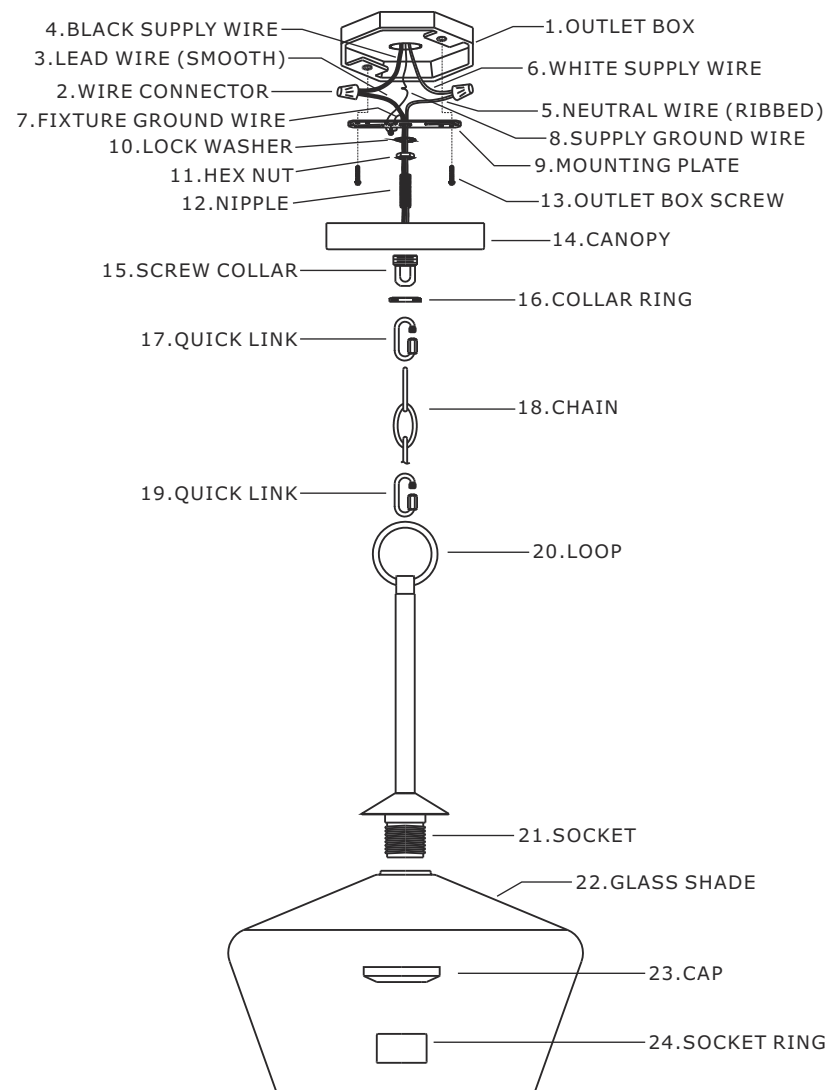

ITEM NO: 55201