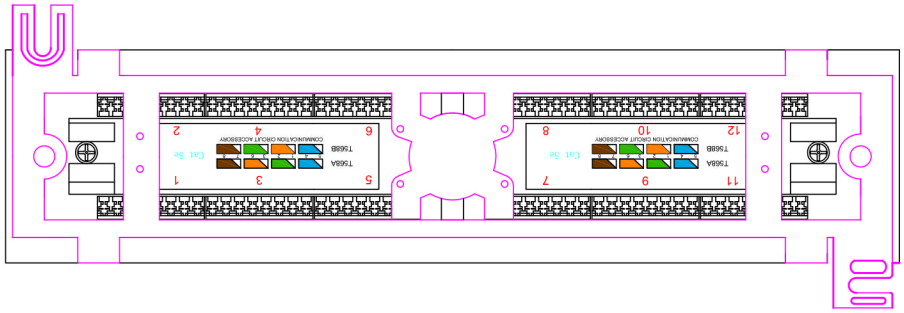



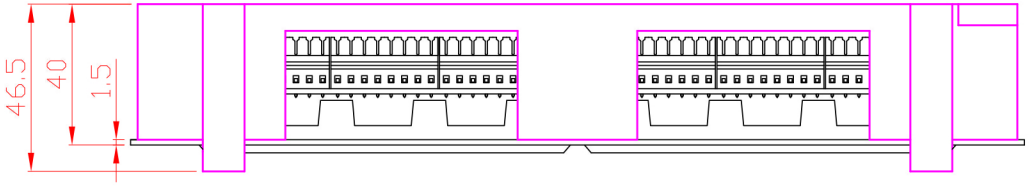

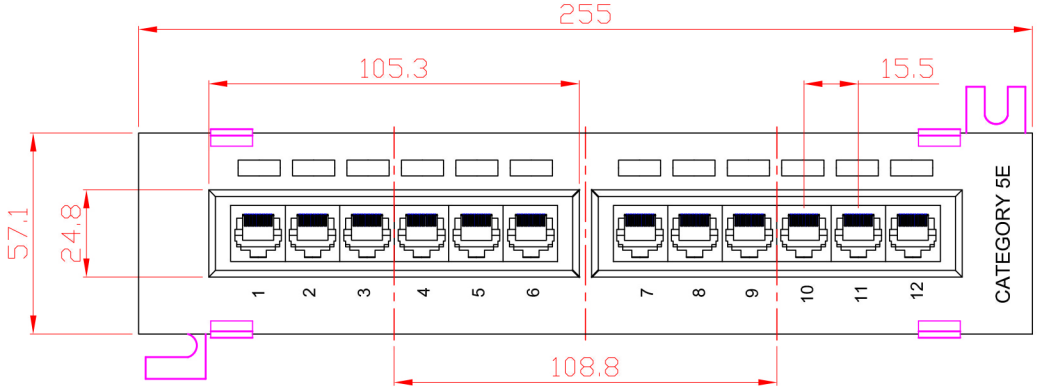

NOTES:

ELECTRICAL:

1. VOLTAGE RATING:125 VAC RMS
2. CURRENT RATING:1.5AMP
3. CONTACT RESISTANCE:100MILLIOHMS MAX
4. INSULATION RESISTANCE:1000 MEGOHMS MIN @500 VDC
5. DIELECTRIC STRENGTH:750 VAC RMS 60Hz,1MIN

ENVIRONMENTAL:

1. STORAGE:-40° TO +85°
2. OPERATION:0° TO 70°

MECHANICAL:

1. HOUSINGG MATERIAL:ABS;
2. PANEL FRAME:CARBON STEEL,POWDER, COATING IN BLACK COLOR,Spcc1.5mm;
3. PCB MATERIAL:FR-4 T=1.5mm;
4. IDC MATERIAL:PC ,CONTACT:PHOSPHOR BRONZE; WITH NICKEL PATING;
5. RJ45 JACK LIFE:750 TIMES MIN;
6. IDC LIFE:200 TIMES MIN;
7. WIRE:AWG 22-26;

SYM	Number	Bill No. of Alteration	Signature	Date

Drawn	Ding jian bo	2016.1.13	Tolerance
Checked	Ge pei jun	2016.1.13	0.00-20.00 ±0.10 20.00-50.00 ±0.15 50.00-100.00 ±0.20 100.00- ±0.25 Angle ±30'
Approved	Wang wei jun	2016.1.13	

Material				Item No.	
Angles Projection	Size	Scale	Unit	DWG No.	
	A4	X:1	mm	Part Name	12Ports Cat5e Patch Panel Wall-Mounted Type
Sheet	1 OF 1	Version: A/0		ERP Part No.	