






Examine all packaging material for small parts that may have come loose during shipment. Periodic checks are recommended to insure that all components are in proper position, tight and free from damage. Keep this assembly instruction for future reference. Adult assembly is required. The product of Hillsdale Furniture, LLC is designed for residential use only. Customer Service Phone Number: 502-562-0000


**HARDWARE LIST**

- A (12) 1/4" x 5/8" Allen Bolts
- B (2) 1/4" x 1" Allen Bolts
- C (14)  $\Phi 13 \times \Phi 6.2 \times 1 \text{mm}$  (1/4") Flat Washers
- D (14)  $\Phi 9 \times \Phi 7 \times 1 \text{mm}$  (1/4") Spring Washers
- E (1) 1/4" Allen Wrench

**PIECES LIST**

- F (1) Stool Back Panel
- G (1) Stool Seat Base
- H1 (2) Legs
- H2 (2) Legs
- J (1) Cross Brace

PART	QTY	HARDWARE	PART	QTY	HARDWARE
A	12		B	2	
C	14		D	14	
E	1				

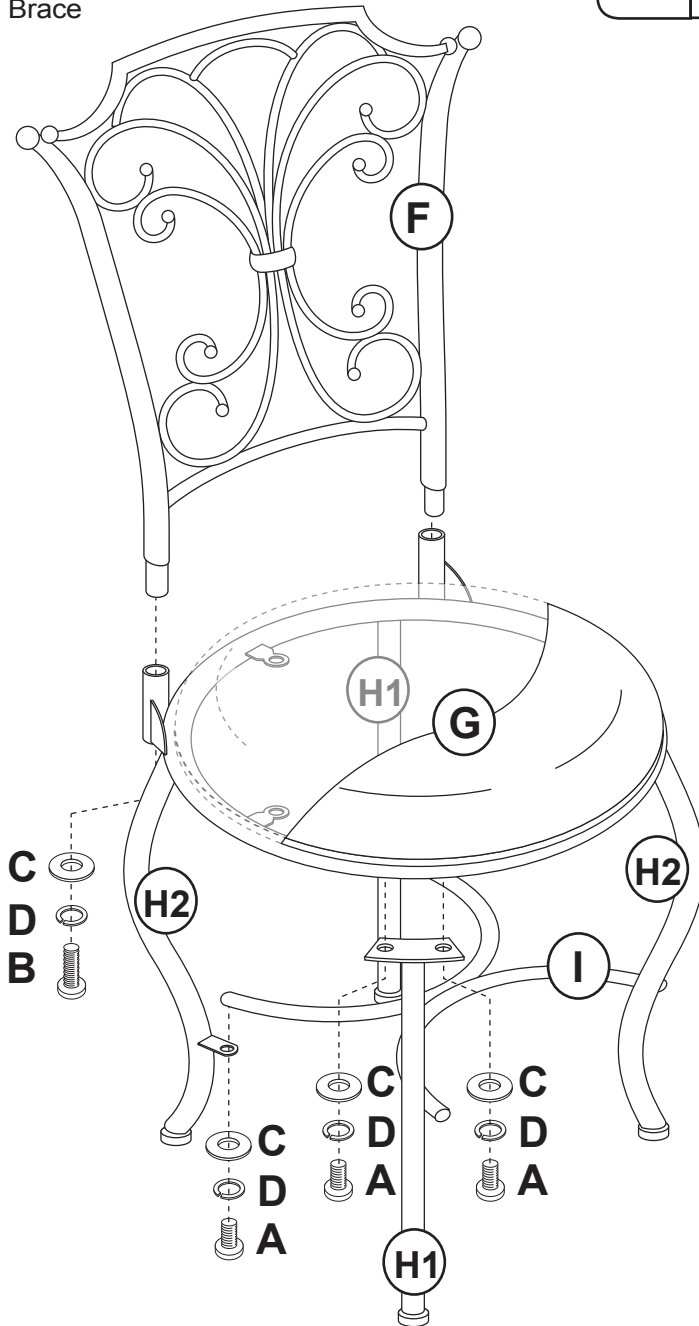

**STEP 1**

Begin assembly by attaching Stool Back Panel (F) to Stool Seat Base (G), using 1 Long Allen Bolt (B), 1 Spring Washer (D) & 1 Flat Washer (C) on each bottom end. Tighten all bolts for this step.

**STEP 2**

Next, attach all 4 Legs (H1 & H2) to Stool Seat Base (G), using 2 Medium Allen Bolts (A), 2 Spring Washers (D) & 2 Flat Washers (C) per each leg. Only hand tighten bolts for this step.

**STEP 3**

Next, attach Cross Brace (I) to each Leg (H1 & H2), using 1 Allen Bolt (A), 1 Spring Washer (D), 1 Flat Washer (C). Tighten all bolts from Steps 1 - 3 here.

*Assembly of your new Vanity Stool is now complete. You may need to adjust the foot glides (located on bottom of each leg) to properly level this stool to your sitting preference. Please keep this Assembly Instruction Sheet for any future use or information.*