


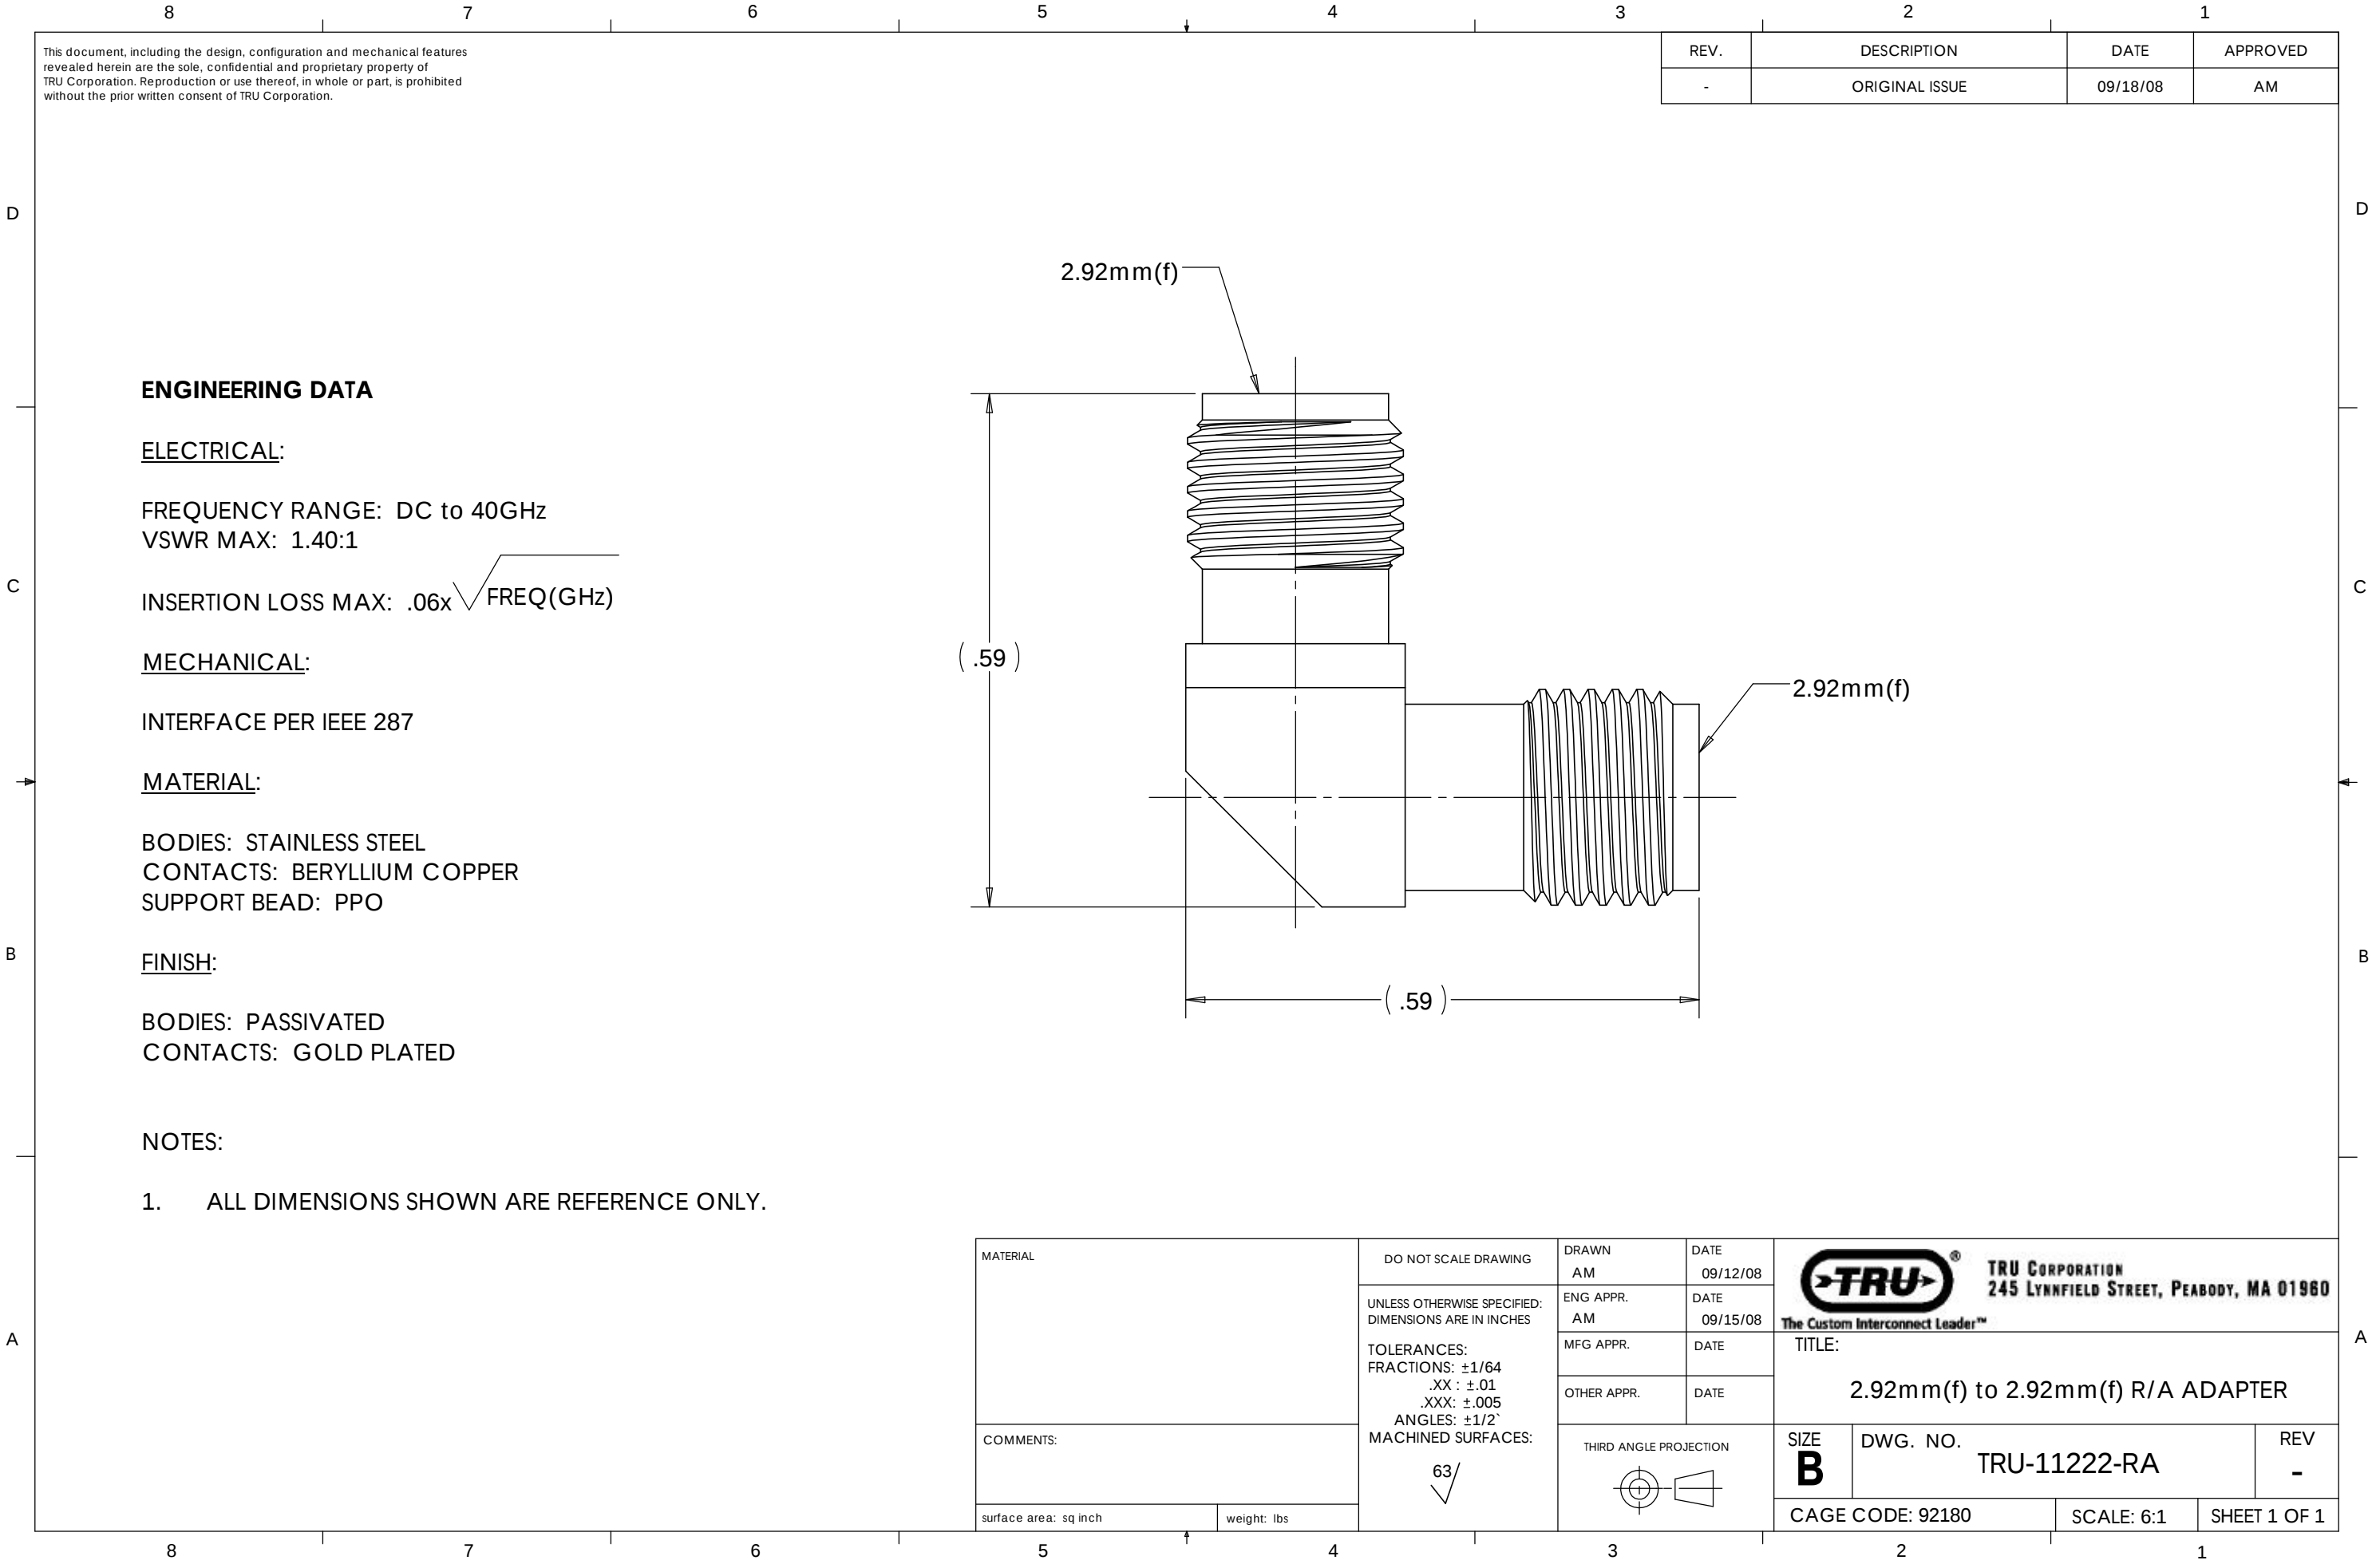

This document, including the design, configuration and mechanical features revealed herein are the sole, confidential and proprietary property of TRU Corporation. Reproduction or use thereof, in whole or part, is prohibited without the prior written consent of TRU Corporation.

REV.	DESCRIPTION	DATE	APPROVED
-	ORIGINAL ISSUE	09/18/08	AM

ENGINEERING DATA

ELECTRICAL:

FREQUENCY RANGE: DC to 40GHz
VSWR MAX: 1.40:1

INSERTION LOSS MAX: .06x√FREQ(GHz)

MECHANICAL:

INTERFACE PER IEEE 287

MATERIAL:


BODIES: STAINLESS STEEL
CONTACTS: BERYLLIUM COPPER
SUPPORT BEAD: PPO

FINISH:

BODIES: PASSIVATED
CONTACTS: GOLD PLATED

NOTES:

1. ALL DIMENSIONS SHOWN ARE REFERENCE ONLY.

MATERIAL		DO NOT SCALE DRAWING	DRAWN AM	DATE 09/12/08	 TRU CORPORATION 245 LYNNFIELD STREET, PEABODY, MA 01960 The Custom Interconnect Leader™			
		UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONS: ±1/64 .XX : ±.01 .XXX: ±.005 ANGLES: ±1/2` MACHINED SURFACES: 63/√	ENG APPR. AM	DATE 09/15/08				
			MFG APPR.	DATE	TITLE: 2.92mm(f) to 2.92mm(f) R/A ADAPTER			
			OTHER APPR.	DATE				
COMMENTS:			THIRD ANGLE PROJECTION 		SIZE B	DWG. NO. TRU-11222-RA		REV -
					CAGE CODE: 92180		SCALE: 6:1	SHEET 1 OF 1
surface area: sq inch		weight: lbs						