

BRIZO®

LAVATORY FAUCETS

■ Siderna® Bath Collection

■ Two Handle Wall-Mounted Lavatory Valve

STANDARD SPECIFICATIONS:

- Max. 1.50 gpm @ 60 psi, 5.70 L/min @ 414 kPa
- Max. (ECO models only) 1.20 gpm @ 60 psi, 4.54 L/min @ 414 kPa
- Three hole mount
- Control mechanism shall be of the rotating ceramic cylinder type with 90° (1/4 turn) rotation
- Recommend 1 1/2" hole size
- Drain sold separately
- Handles attach to valve by use of magnets inside handles. No set screw required.
- Handles sold separately


WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.




COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ASME A112.18.2 / CSA B125.2
- Indicates compliance to ICC/ANSI A117.1
- EPA WaterSense®
- Verified compliant with .25% weighted average Pb content regulations.

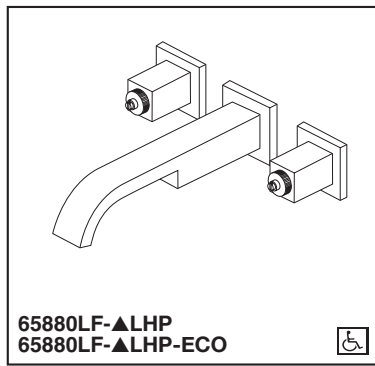

Submitted Model No.: _____

Specific Features: _____

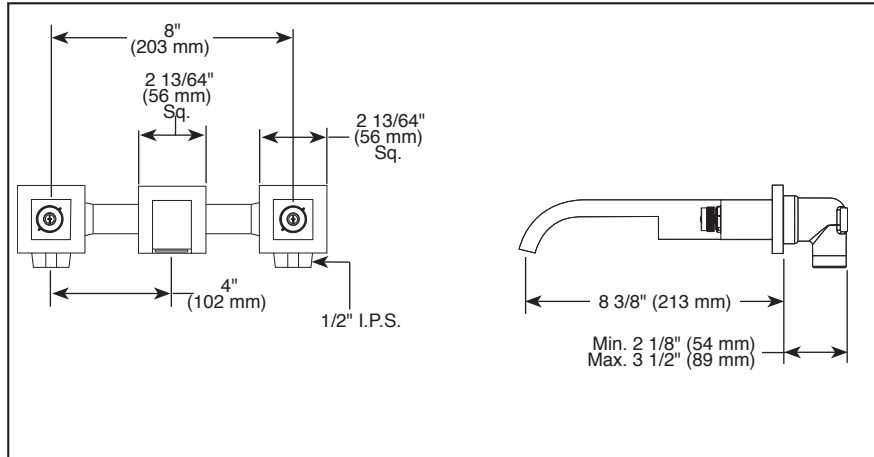

RP72411▲ Grid Strainer Drain less overflow holes 	RP72413▲ Push Button Drain less overflow holes 	RP81627▲ Push Button Drain less overflow holes
RP72412▲ Grid Strainer Drain with overflow holes 	RP72414▲ Push Button Drain with overflow holes 	RP81628▲ Push Button Drain with overflow holes
HL5880▲ (Metal Inserts) 	HL5881▲ (Green Glass Inserts) 	HL5882▲ (Solar Gray Glass Inserts)

▲ Designate Proper Finish Suffix

Brizo Kitchen & Bath Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.

Brizo Kitchen & Bath Company
 Indianapolis, Indiana 46280
 A Division of Masco Corporation of Indiana
 © 2016 Brizo Kitchen & Bath Company