8 7 6 5 4 3 2 1

This document, including the design, configuration and mechanical features revealed herein are the sole, confidential and proprietary property of TRU Corporation. Reproduction or use thereof, in whole or part, is prohibited without the prior written consent of TRU Corporation.

D

С

REV.	DESCRIPTION	DATE	APPROVED	
-	ORIGINAL ISSUE	3/21/96	Koch	
Α	CHANGED PER ECO 2566	3/1/04	RMK	
В	CHANGED PER ECO 2818	6/12/06	DA	

ENGINEERING DATA:

ELECTRICAL:

IMPEDANCE: 50 OHMS NOMINAL

MECHANICAL:

INTERFACE: 7-16(m) PER IEC 169-4, DIN 47223

SQS(m) PER TRU CORPORATION STANDARD

MATERIAL:

INSULATORS: TEFLON

GASKETS: SILICONE RUBBER

CONTACT FINGERS: BERYLLIUM COPPER

OTHER METAL PARTS: BRASS


FINISH:

CONTACTS: SILVER PLATED

OTHER METAL PARTS: NICKEL PLATED

NOTES:

- 1. UNLESS OTHERWISE SPECIFIED; ALL DIMENSIONS ARE REFERENCE ONLY.
- 2. ALL DIMENSIONS ARE IN INCHES.
 BRACKETED DIMENSIONS ARE IN MILLIMETERS.

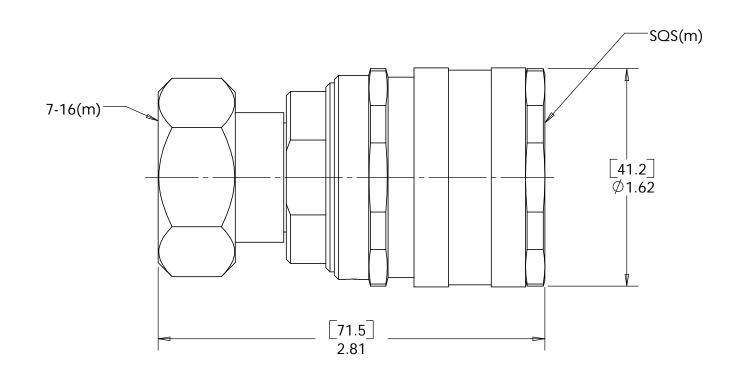

MATERIAL	DO NOT SCALE DRAWING	DRAWN JDW	DATE 3/21/96	6	FRU-)°	TRU COR		ADMINISTRATION	
	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES	ENG APPR. Koch	DATE 3/21/96	245 LYNNFIELD STREET, PEABODY, MA 01960 The Custom Interconnect Leader**					
	TOLERANCES: FRACTIONS: ±1/64 .XX: ±.01 .XXX: ±.005 ANGLES: ±1/2' MACHINED SURFACES:	MFG APPR.	DATE	TITLE:	TITLE: CONNECTOR, COAXIAL, RF				
		OTHER APPR.	DATE	7-16(m) to SQS(m) ADAPTER, STR					
COMMENTS:		THIRD ANGLE PRO	DJECTION	SIZE	_			REV B	
surface area: sq inch weight: lbs	- V	Ψ'		CAGE CODE: 92180		SCALE: 1.5:1	SHEET 1 OF 1		

7

5

2

,

1