USER'S MANUAL

MCBK400

3" (76mm) WEATHER RATED SPEAKER AND AMPLIFIER SYSTEM



BOSS Audio Systems

3451 Lunar Court • Oxnard, CA 93030

www.bossaudio.com 800-999-1236 US Toll-free 805-988-0192 US Local Main

tech support: www.bossaudio.com/support/technical-support



0916

iPod® and iPhone® are trademarks of Apple, Inc. registered in the U.S. and other countries. BOSS Audio Systems is not affiliated with Apple, Inc.

USER'S MANUAL

MCBK400

3" (76mm) WEATHER RATED SPEAKER AND AMPLIFIER SYSTEM













MCBK400 Motorcycle/UTV Amplified Speaker System

Congratulations on your purchase of a BOSS Audio Systems Off-Road amplified speaker system. It has been designed, engineered and manufactured to bring you the highest level of performance and quality, for years of listening pleasure.

Thank you for making BOSS AUDIO SYSTEMS your choice for entertainment!



MCBK400 Motorcycle/UTV Amplified Speaker System

NOTES			

MCBK400 Motorcycle/UTV Amplified Speaker System

Specifications

Operation Voltage	10~16 V
Max Power	600 W
THD	<0.1%
S/N	>85 dB
Channel Separation	>50 dB
Frequency Response	80 Hz - 15 KHz
Sensitivity	150 mv -1v
Speaker Wires	4.9'
Volume Control Wire	5.9'
Audio Input Cable	5.9'
Power Cable	8.2'
Bracket Size Range	0.75" ~1.25"
Fuse Rating	5Δ

MCBK400 Motorcycle/UTV Amplified Speaker System

Contents

Amplifier	1 PC		
High-Performance, Weatherproof Speakers			
Amplifier Mounting Screws	4 PCS		
Mounting Hardware	2 PCS		
Rubber Mounting Shims			
Amplifier Mounting Hardware	8 PCS		
Fuse	1 PC		
User's manual	1 PC		

Features:

RCA & 3.5mm Audio Inputs

Speaker Clamp Mounts


Weatherproof Volume Control


High-Impact, High Temp Speaker Enclosures

Weatherproof Speakers

MCBK400 Motorcycle/UTV Amplified Speaker System

Connections



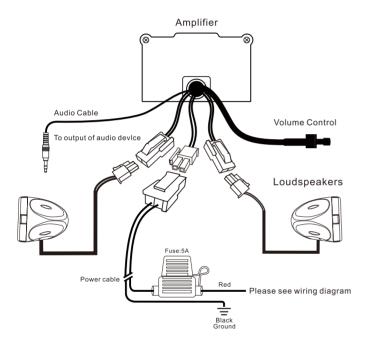

Amplifier and Loudspeaker Mounting

Install Reminder

The components and wiring should not be installed around any moving parts, keep away from ignition parts, fuel lines, or any hot exhaust

Speakers should not be installed where they might inhibit safety features on the vehicle (i.e. lights, horns, brake levers, etc...)

MCBK400 Motorcycle/UTV Amplified Speaker System

Installation

- 1. Screw the brackets to the bottom of the speakers.
- 2. Find a safe, ideal mounting location and fit the brackets over the chosen mounting bars.
- 3. Fasten the mounting screws after you review the safety of the mounting location.

Wiring

- Be sure to run the wiring securely and far away from any moving components.
- Connecting the power cable to the power source: You will need to connect the 12V red wire to a (fused 5A) switched power source.
- 3. Use the 3.5mm stereo jack to connect to your entertainment source(MP3 player, etc).
- Use your player device and wired remote volume controller to control your level of loudness.