
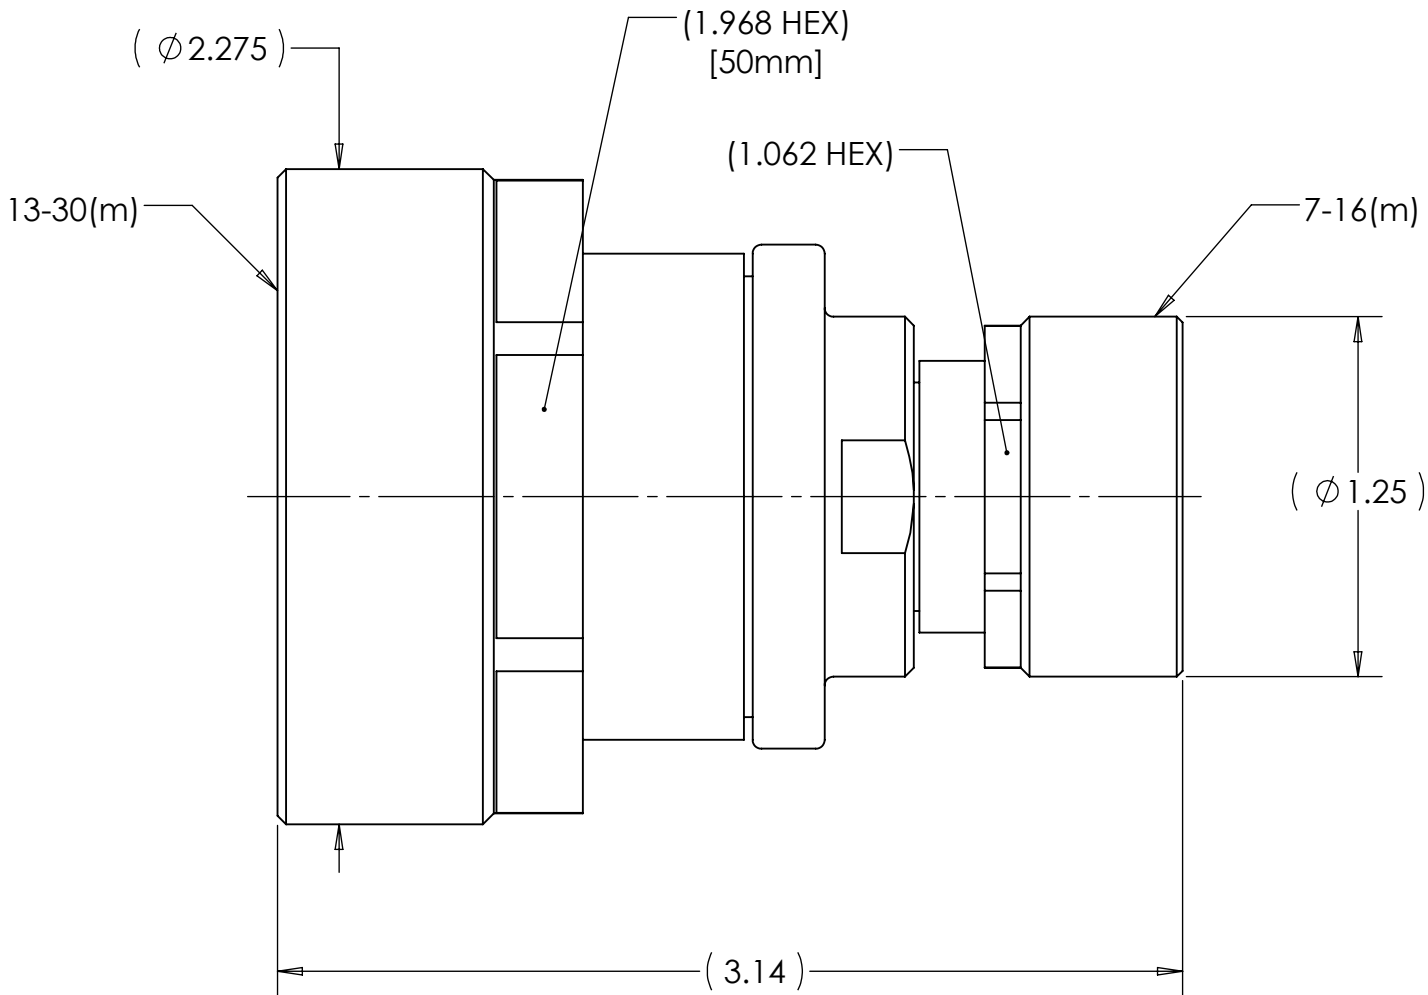


This document, including the design, configuration and mechanical features revealed herein are the sole, confidential and proprietary property of TRU Corporation. Reproduction or use thereof, in whole or part, is prohibited without the prior written consent of TRU Corporation.

REV.	DESCRIPTION	DATE	APPROVED
-	ORIGINAL ISSUE	12/28/11	AM

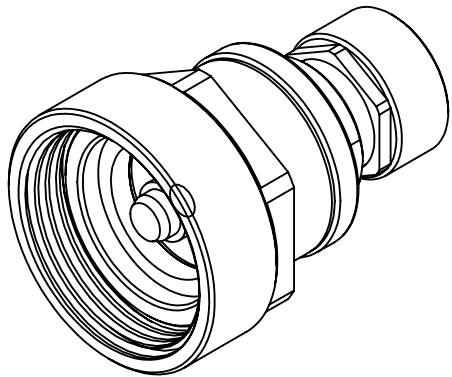

ENGINEERING DATA:


ELECTRICAL:
IMPEDANCE: 50 OHMS NOMINAL
FREQUENCY RANGE: DC to 4GHz

MECHANICAL:
INTERFACE: 13-30 PER IEC 60169-5
7-16 PER DIN 47223

MATERIAL:
CENTER CONTACTS: BRASS
INSULATORS: PTFE
BODIES & COUPLING NUT: BRASS
GASKET: SILICONE RUBBER

FINISH:
CENTER CONTACTS: SILVER PLATED
BODIES & COUPLING NUT: NICKEL PLATED

NOTES:
1. UNLESS OTHERWISE SPECIFIED; ALL DIMENSIONS ARE FOR REFERENCE ONLY.

MATERIAL	DO NOT SCALE DRAWING	DRAWN AM	DATE 12/27/11	TRU Corporation 245 Lynnfield St, Peabody, MA 01960 EXPERIENCE. TRU INNOVATION.		
	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES	ENG APPR. AM	DATE 12/27/11			
	TOLERANCES: FRACTIONS: ±1/64 .XX : ±.01 .XXX: ±.005 ANGLES: ±1/2° MACHINED SURFACES: 	MFG APPR.	DATE	TITLE: CONNECTOR, COAXIAL 13-30(m) to 7-16(m) ADAPTER		
		OTHER APPR.	DATE			
COMMENTS:		THIRD ANGLE PROJECTION		SIZE B	DWG. NO. TRU-11884	REV -
surface area: sq inch weight: 1.21 lbs				CAGE CODE: 92180	SCALE: 3:2	SHEET 1 OF 1