

REACH-IN FREEZERS

MODEL: MVF-23FDHC MVF-49FDHC MVF-72FDHC



MVF-23FDHC



MVF-49FDHC



MVF-72FDHC


Maxx Cold V-Series Reach-In Freezers store frequently accessed foodservice products within reach and at the proper storage temperature. The Reach-in Freezers are constructed of durable stainless steel, and include self-closing doors and an oversized refrigeration system to meet the needs of demanding applications.

FEATURES AND CONSTRUCTION

- Constructed of a durable, easy to clean stainless steel exterior and painted aluminum interior
- Self-closing, locking doors with easy to grip recessed handles
- Adjustable heavy-duty wire shelves (3 per section/door)
- Open door alert beeps when door has been open for 3 minutes
- Equipped with 4" swivel casters
- Digital control system
- LED temperature display
- Automatic defrost system
- Automatic interior lighting
- Equipped with integrated condensate evaporator therefore no drain line connection is needed
- Urethane foam insulated walls and doors

ELECTRIC

Single & Double Door: 115V / 60Hz / 1Ph
 Triple Door: 230V / 50-60Hz / 1Ph
 8.2' (2m) cord set included



NEMA 5-15P



NEMA L14-20R

NOMINAL STORAGE CAPACITY

MVF-23FDHC	23 Cu Ft (651 L)
MVF-49FDHC	49 Cu Ft (1387 L)
MVF-72FDHC	72 Cu Ft (2039 L)

3RD PARTY APPROVALS



Intertek

Certified to ANSI NSF 7



Intertek

Certified to ANSI UL 471



Zero Ozone Depletion Potential



DOE 2018 Compliant

TEMPERATURE

Holding temperature -10°F to 10°F (-23°C to -12°C)


- Efficient forced-air refrigeration system

MAXX COLD WARRANTY (USA / CANADA)

1 Year Compressor Only Warranty; 6 Months Parts & Labor

For more information, contact:

TechnicalServices@TheLegacyCompanies.com or 877.368.2797

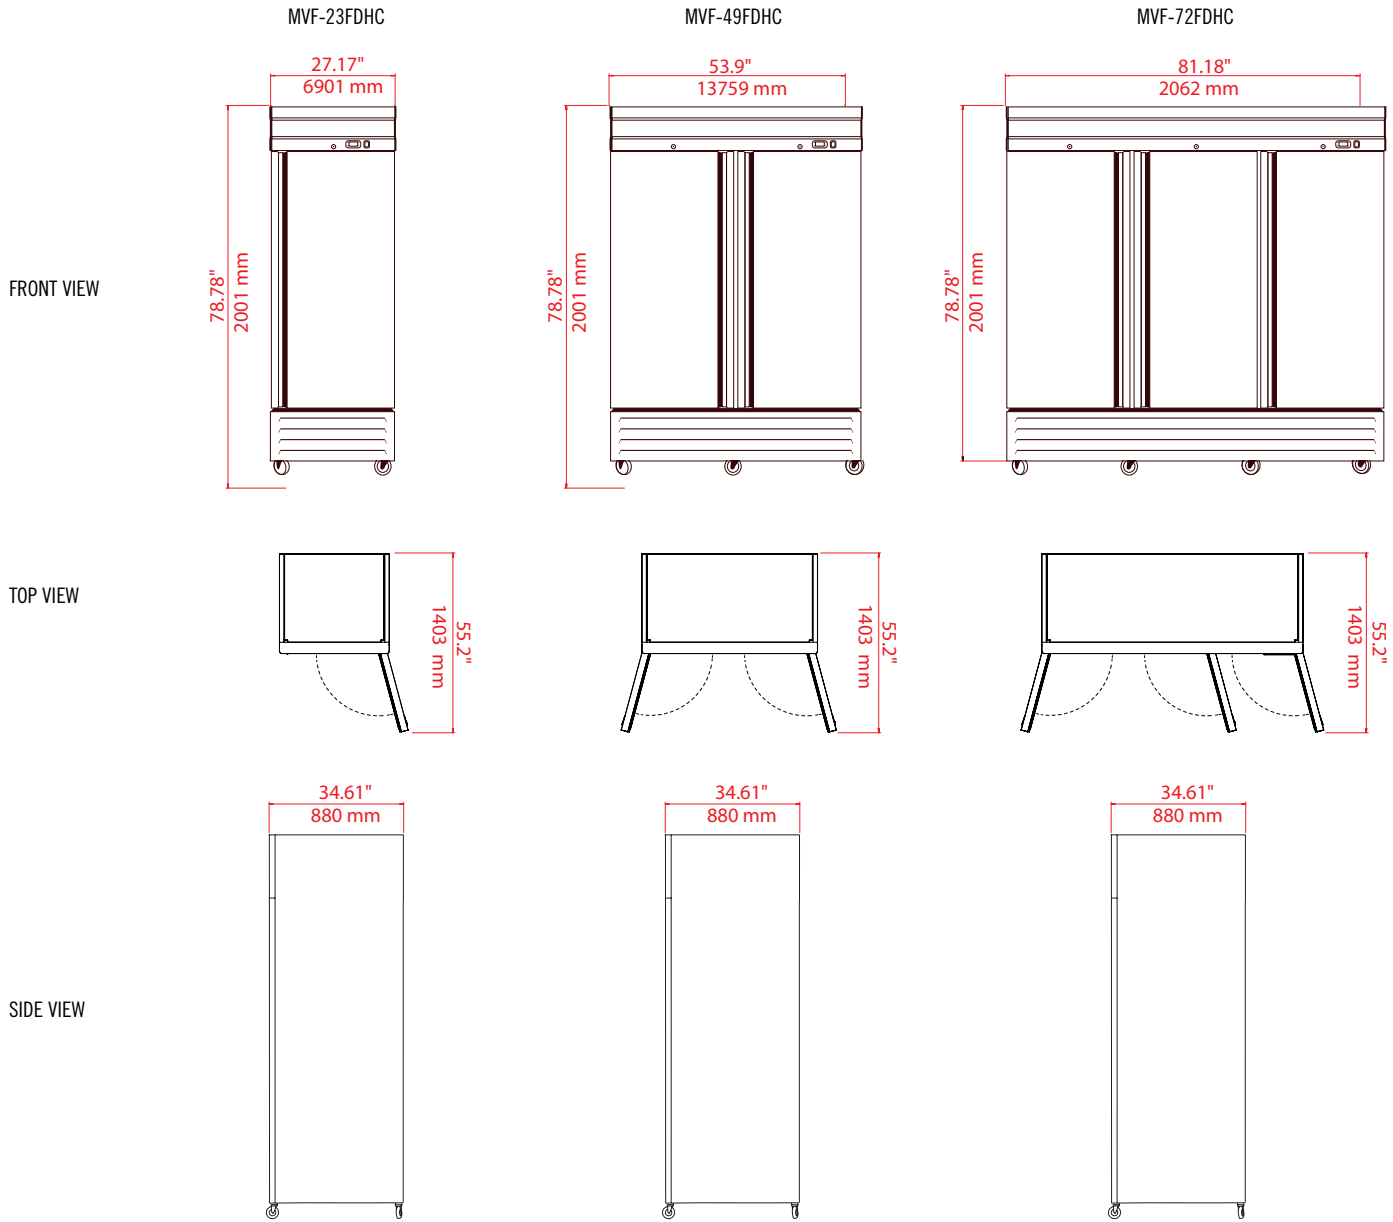

MODEL	EXTERNAL DIMENSIONS	INTERNAL DIMENSIONS	NOMINAL CAPACITY	HOLDING TEMPERATURE RANGE	AMP DRAW	SHIPPING WEIGHT	REFRIGERANT AND CHARGE SIZE	DOORS / SHELVES	ELECTRICAL
MVF-23FDHC	27.2" x 34.6" x 78.8" (691 x 879 x 2002 mm)	22.3" x 29.06" x 51.37" (566 x 738 x 1305 mm)	19 Cu Ft (538 L)	-10°F to 10°F (-23°C to -12°C)	2.2A	220 lbs (100 kg)	R-600A 2.19oz (62 g)	1 / 3	115V / 60Hz / 1Ph
MVF-49FDHC	54.2" x 34.6" x 78.8" (1377 x 879 x 2002 mm)	49.3" x 29.06" x 51.37" (1252 x 738 x 1305 mm)	42 Cu Ft (1189 L)	-10°F to 10°F (-23°C to -12°C)	2.2A	342 lbs (155 kg)	R-290A 4.06oz (115 g)	2 / 6	115V / 60Hz / 1Ph
MVF-72FDHC	81.2" x 34.6" x 78.8" (2062 x 879 x 2002 mm)	76.3" x 29.06" x 51.37" (1938 x 738 x 1305 mm)	65 Cu Ft (1841 L)	-10°F to 10°F (-23°C to -12°C)	2.2A	524 lbs (238 kg)	R-290A 4.41oz (125 g)	3 / 9	230V / 60Hz / 1Ph

INSTALLATION

- Shorter caster options are available to lower the overall height of the unit