

# GRACELYN GLOBE 4LT VANITY LIGHT ASSEMBLY/INSTALLATION INSTRUCTIONS

Please read carefully and save these instructions, as you may need them at a later date.

# **CAUTION**

WARNING: Risk of Fire. Min 75°C supply conductors. Consult a qualified electrician to ensure correct branch circuit conductor.

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.

### **GENERAL**

All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

# **TOOLS REQUIRED**


Phillips screwdriver.

#### ASSEMBLY AND INSTALLATION

# Turn off the power at fuse or circuit breaker.

- Gently take all parts out of the package, lay them on a smooth surface, unscrew the BALL NUTS from the FIXTURE SCREWS. Attach the CROSS BAR to the JUNCTION BOX using JUNCTION BOX SCREWS.
- 2. Make wire connections with WIRE NUTS:
- A Connect the black wire from Fixture to the black supply wire.
- B Connect the white wire from Fixture to the white supply wire.
- C Attach the fixture ground wire to the CROSS BAR with the green GROUND SCREW. Then connect it to the supply ground wire with a WIRE NUT. Carefully tuck wires back into the JUNCTION BOX.
- 3. Attach the FIXTURE to the CROSS BAR through SCREW HOLES as shown, and secure it with BALL NUTS.
- Install BULB (not included). See relamping label at socket area or packaging for maximum allowed wattage.
- 5. Unscrew the DECORATIVE NUT, Install the GLASS as shown.
- 6. Attach the GLASS SHADE onto FIXTURE using DECORATIVE NUTS.

# ASSEMBLY AND INSTALLATION (CONT.)

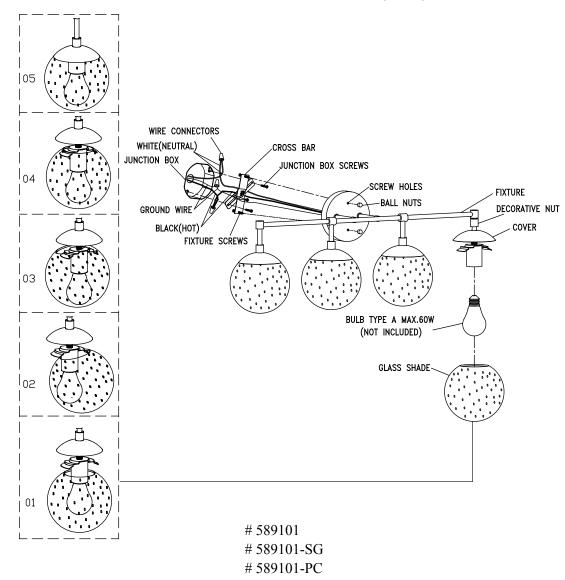

IF IN DOUBT ABOUT ELECTRICAL INSTALLATION, CONSULT A LICENSED ELECTRICIAN.

Customer Service 1-800-558-8700