
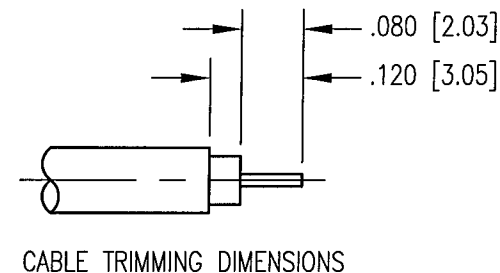


DWG. NO.		252-500-0854P	
REV	DESCRIPTION	BY	APPD
B	ECR 7083	JED	11/8/01

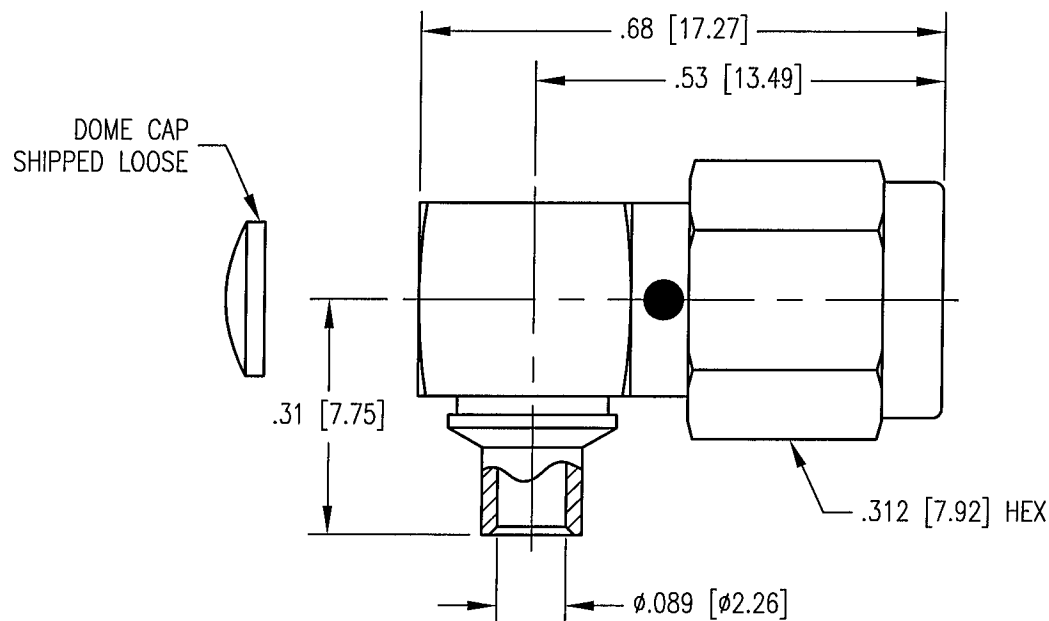

NOTES:

1. MATERIALS:

BODY AND COUPLING NUT: STAINLESS STEEL PER ASTM A582
 CENTER CONTACT AND CAP: BRASS PER ASTM B16
 RETAINING RING: BERYLLIUM COPPER PER ASTM B194
 INSULATOR: TEFLON PER ASTM D1710
 GASKET: SILICONE RUBBER PER ZZ-R-765

2. FINISH:

BODY: .000015 MIN. GOLD PER MIL-G-45204 OVER
 .000050 MIN. NICKEL PER QQ-N-290
 CENTER CONTACT: .000030 MIN. GOLD PER MIL-G-45204 OVER
 .000050 MIN. NICKEL PER QQ-N-290
 COUPLING NUT: PASSIVATED PER ASTM A967
 CAP: .000005 MIN. GOLD PER MIL-G-45204 OVER
 .000050 MIN. NICKEL PER QQ-N-290

3. FOR USE WITH .085 DIA. SEMI-RIGID CABLE OR EQUIVALENT.

4. FOR CABLING PROCEDURES USE CAP 5-03 WITH TRIMMING DIMENSIONS SHOWN.

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES [MM] TOLERANCES: DECIMALS .XX ± .01/0.254 .XXX ± .005/0.127 ANGLES ± 2° SCALE: 4:1				Litton Winchester/Retconn 400 Park Road Wallingford, Connecticut 06795	
CUSTOMER DRAWING				TITLE SMA RIGHT ANGLE PLUG WITH PRESS-FIT CAP	
DRAWN JED	DATE 6/15/00	CHECKED JH	DATE 6/15/00	SHT. 1	OF 1
APPROVED JMC	DATE 6/15/00	APPROVED KJT	DATE 6/15/00	REV. B	A 252-500-0854P