

# SN-FXP13/66WDR/Z(III)


# 1080P Hybrid Motorized Analogue Dome



### Key features

- 1/2.9" Sony Progressive Scan CMOS
- 2.8-12mm Motorized Lens
- Full HD 1080P
- Video Transmission 300m
- IR Range 20-25m
- 2D DNR,dWDR,ICR,BLC,ATW
- Support AHD/TVI/CVI/CVBS Hybrid Output
- IP66

### Dimension

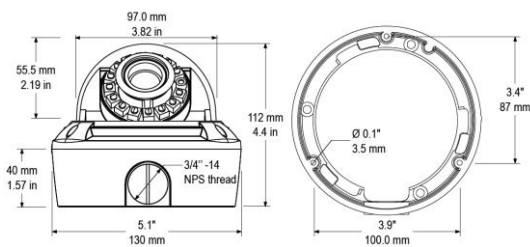

### Accessories



SN-CBK629A SN-CBK633 SN-CBK623 SN-CBK624



SN-CBK627B SN-CBK625 SN-CBK626 SN-CBK633B

### Specifications

CAMERA	
Image Sensor	1/2.9" Sony CMOS
Signal System	PAL/NTSC
Min. illumination	Color:0.01Lux@(F1.2,AGC ON) ; B/W:0Lux@(IR LED ON)
S/N Ratio	≥50dB
Day & Night	ICR
Shutter Speed	PAL:1/50-1/50000, NTSC:1/60-1/60000
Wide Dynamic Range	dWDR
Digital Noise Reduction	2D
Lens	2.8-12mm Motorized Lens
FOV	90°~35°
IR LED	15pcs
IR Wavelength	850nm
IR Range	20-25m
OSD Joystick	Support
Up the Coax	Support
IMAGE	
Effective Resolution	1920x1080
Frame	PAL:25fps ,NTSC:30fps
Mirror	N/A
Defog	N/A
HLC	N/A
Privacy Masking	N/A
Motion Detection	N/A
VIDEO OUTPUT	
Max Distance	75-5 300m
Video Output	AHD/TVI/CVI/CVBS
GENERAL	
Power Supply	DC12V±10% (AC24V Optional)
Power Consumption	4.5W(Max)
Operating Temperature	-10°C ~ 55°C (14°F ~ 131°F)
Operating Humidity	0% - 85% RH
Ingress Protection	IP66,IK10
Approvals	CE / FCC
Material	Aluminium Alloy
Product Dimensions	Φ130×112mm
Product Weight	900g