


DWG. NO.		361-595-0850H	
REV	DESCRIPTION	BY DATE	APPD
A	RELEASED PER ECR 7401	JED 7/15/02	JED

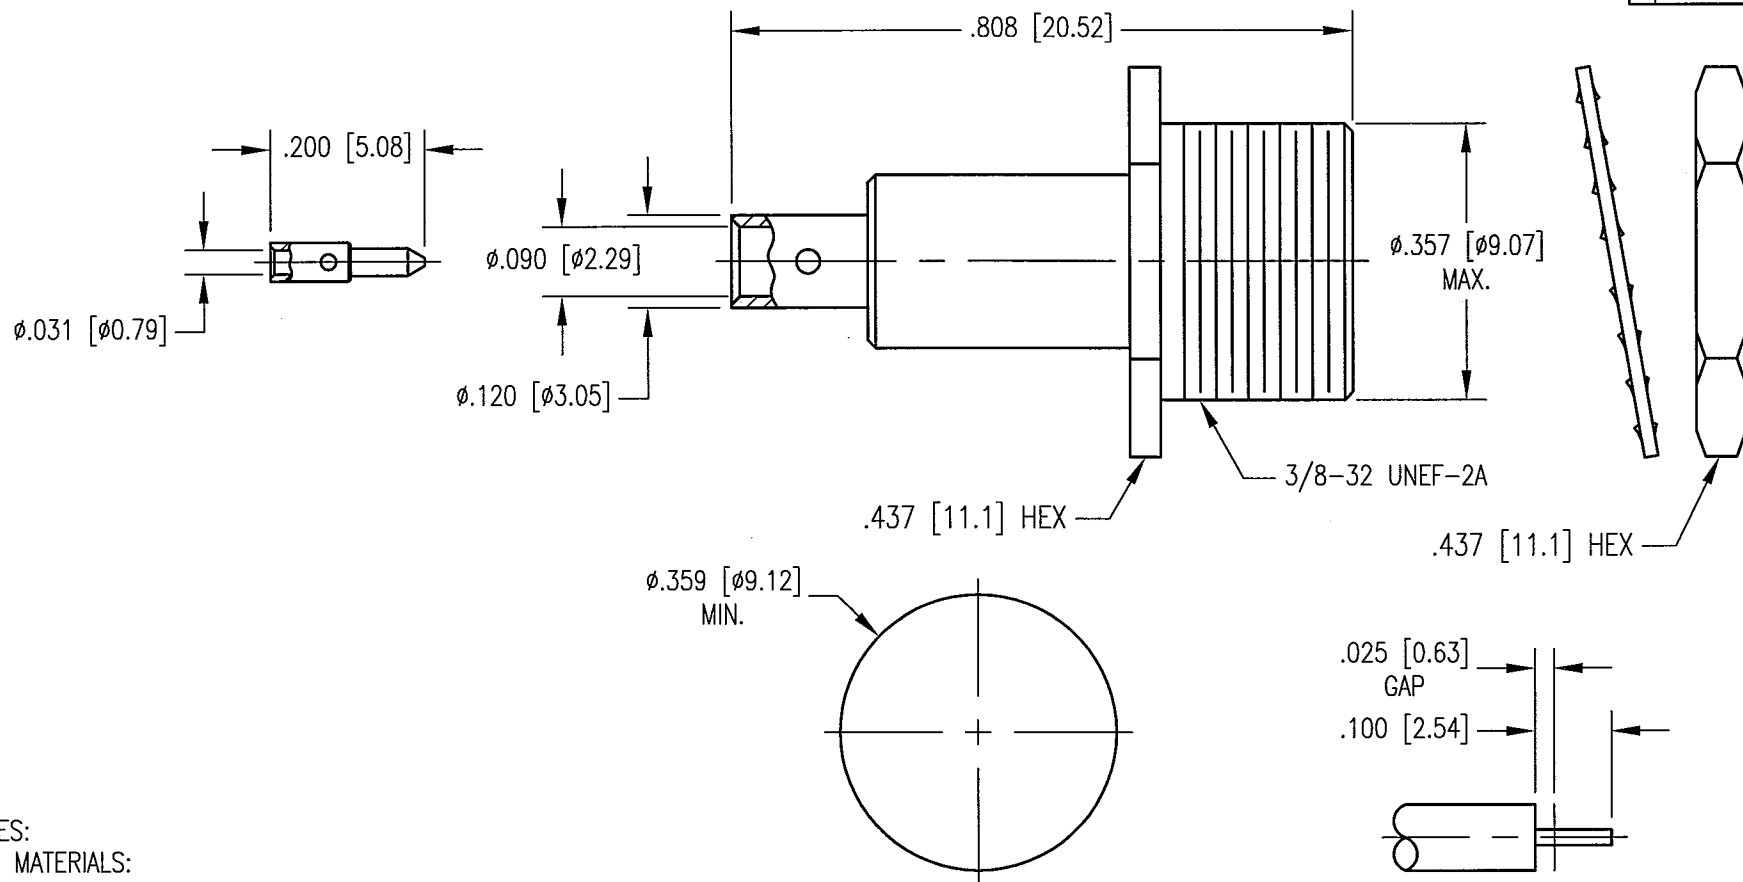

NOTES:

1. MATERIALS:

CENTER CONTACT: COPPER ALLOY
 LOCKWASHER: PHOSPHOR BRONZE PER ASTM B103
 ALL OTHER METAL PARTS: BRASS PER ASTM B16
 INSULATOR: TEFLON PER ASTM D1710

2. FINISH:

CONTACTS AND SHROUD: .000030 MIN. GOLD PER MIL-G-45204 OVER
 .000050 MIN. NICKEL PER QQ-N-290
 BODY: .000015 MIN. GOLD PER MIL-G-45204 OVER
 .000050 MIN. NICKEL PER QQ-N-290
 ALL OTHER METAL PARTS: .000005 MIN. GOLD PER MIL-G-45204 OVER
 .000050 MIN. NICKEL PER QQ-N-290

3. FOR USE WITH .085 DIA. SEMI-RIGID CABLE OR EQUIVALENT.

4. FOR CABLING PROCEDURES USE CAP 5-24 WITH TRIMMING DIMENSIONS SHOWN.

RECOMMENDED MOUNTING HOLE

CABLE TRIMMING DIMENSIONS

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES [MM] TOLERANCES: DECIMALS .XX ± .01 [0.254] .XXX ± .005 [0.127] ANGLES ± 2° SCALE: 4:1		NORTHROP GRUMMAN Winchester Electronics 400 Park Road Watertown, CT 06795	
CUSTOMER DRAWING		TITLE BMA STRAIGHT BULKHEAD JACK	
DRAWN JED	DATE 7/15/02	CHECKED JED	DATE 7-18-02
APPROVED JED	DATE 7/15/02	APPROVED JED	DATE 7/15/02
A		361-595-0850H	SHT. 1 OF 1 REV. A