


This document, including the design, configuration and mechanical features revealed herein are the sole, confidential and proprietary property of TRU Corporation. Reproduction or use thereof, in whole or part, is prohibited without the prior written consent of TRU Corporation.

REV.	DESCRIPTION	DATE	APPROVED
-	ORIGINAL ISSUE	10/26/09	AM

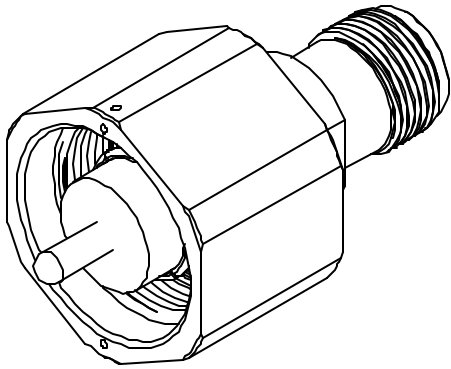

ENGINEERING DATA


ELECTRICAL:
IMPEDANCE: 50 OHMS NOMINAL



MECHANICAL:
INTERFACE:
LC(m) PER MIL-STD-348 FIG 315.1
HN(f) PER MIL-STD-348 FIG 317.2 WITH POLYETHYLENE DIELECTRIC

MATERIAL:
INSULATOR: POLYETHYLENE
CONTACT FINGER & CENTER CONTACT: BERYLLIUM COPPER
O-RING: SILCONE RUBBER
OTHER METAL PARTS: BRASS

FINISH:
COUPLING NUT & BODY: NICKEL PLATED
CONTACT FINGER: SILVER PLATED
CENTER CONTACT: GOLD PLATED

NOTES:
1. UNLESS OTHERWISE SPECIFIED; ALL DIMENSIONS ARE REFERENCE ONLY.

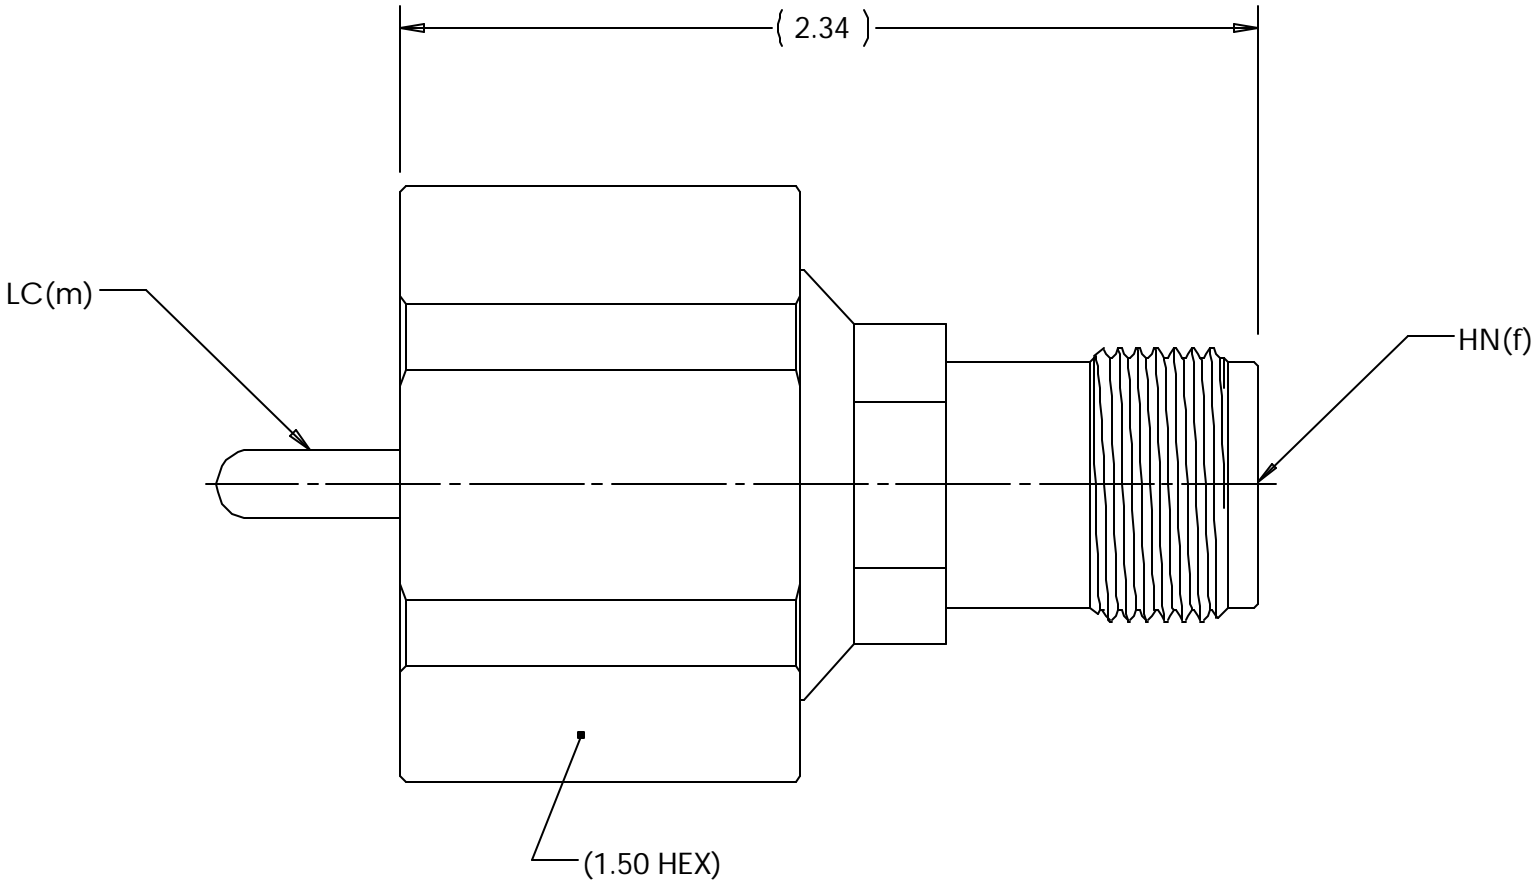

MATERIAL	DO NOT SCALE DRAWING	DRAWN MVC	DATE 10/23/09	 TRU CORPORATION 245 LYNNFIELD STREET, PEABODY, MA 01960 The Custom Interconnect Leader™		
	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES	ENG APPR. AM	DATE 10/26/09			
	TOLERANCES: FRACTIONS: $\pm 1/64$.XX $\pm .01$.XXX $\pm .005$ ANGLES: $\pm 1/2^\circ$ MACHINED SURFACES: 63/	MFG APPR.	DATE	TITLE: CONNECTOR, COAXIAL, RF HN(f) to LC(m) ADAPTER		
	COMMENTS:	OTHER APPR.	DATE			
surface area: sq inch	weight: lbs	THIRD ANGLE PROJECTION 		SIZE B	DWG. NO. TRU-11408	REV -
		CAGE CODE: 92180		SCALE: 2:1	SHEET 1 OF 1	