ELKAY®

sinks + faucets

Stainless Steel Perfect Drain™ InSinkErator® Disposer Installation Instructions

insinkerator

Elkay® Perfect Drain™ sinks are designed and approved for compatible disposers manufactured by InSinkErator® utilizing the Quick Lock® mounting configuration. Use of non-approved disposers may void Elkay warranty.

InSinkErator, Quick Lock and the mounting collar configuration are trademarks of Emerson Electric Co.

To install garbage disposer onto Elkay® Perfect Drain™ Stainless Steel Sink:

1. Locate appropriate step in disposer installation guide (provided with garbage disposer) represented by image below:

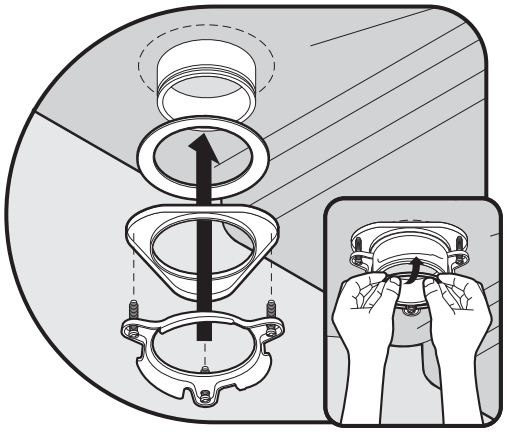

(1) Sink Flange

(2) Fiber Gasket

(3) Backup Flange

(4) Mounting Ring

(5) Screws

(6) Snap Ring

Install Quiet Collar® Sink Baffle into Flange

2. Disassemble Quick Lock® mounting assembly components provided with disposer (1, 2, 3, 4, 5, 6)
3. Sink Flange component (1) is not required, as it is integrated into the Perfect Drain Sink bowl.
4. Follow remaining installation steps as outlined in disposer installation guide, utilizing remaining components (2, 3, 4, 5, 6)

WARNING!

OVER-TIGHTENING OF MOUNTING ASSEMBLY SCREWS (5) COULD CAUSE PERMANENT DEFORMATION OF SINK. DO NOT USE POWER TOOLS TO TIGHTEN!

For further assistance, contact InSinkErator® Customer Service Line 1.800.558.5700 or visit www.insinkerator.com

Zurn Elkay
1333 Butterfield Road, Suite 200
Downers Grove, IL 60515

©2024 Zurn Elkay
elkay.com

74180289
Rev: 03/24

ELKAY® Perfect Drain™ Installation Instructions

For all non-disposer installations in stainless steel Perfect Drain™ sinks.

STEP 1

Install and properly seat **Drain Seal** within groove of **Flange** of Perfect Drain™. Incorrect installation may allow leaks and void the warranty!

***NO** additional Sealant or Plumber's Putty is required.*

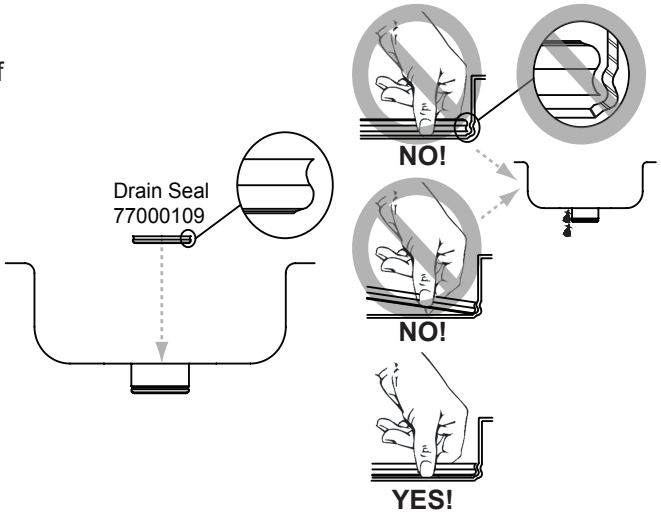

STEP 2

Properly seat **Drain Body** into Perfect Drain.

Place **Gasket** over Perfect Drain™.

Install **Housing** over Perfect Drain™.

Thread **Lock Nut** onto **Drain Body**.

Place **Poly Washer** on **Tailpiece**.

Install **Tailpiece Assembly** onto **Drain Body** with **Coupling Nut.**

Check for leaks and place **Strainer Basket** into **Drain Body**.

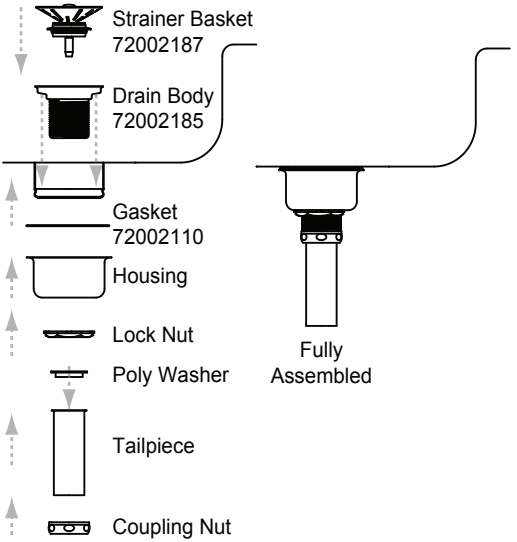

BE CAREFUL TO NOT OVER TIGHTEN THE FITTINGS.

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkay.com for most current version of Elkay product specification sheets.

This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of others producers offerings, be certain these features are not overlooked.

Zurn Elkay
1333 Butterfield Road, Suite 200
Downers Grove, IL 60515

©2024 Zurn Elkay
elkay.com

PART NO. 74180340
Rev: 03/24

ELKAY®

Installation Instructions:
Drop-in Sinks

Attention Installer:

- Elkay recommends that drop-in sinks be installed by a professional, experienced installer.
- Elkay is not responsible for the sink or countertop if damaged during installation.
- Metal edges may be sharp. Use caution when handling.
- Follow all local plumbing and building codes.
- Inspect sink for damage prior to beginning installation.

Required Tools (not included)

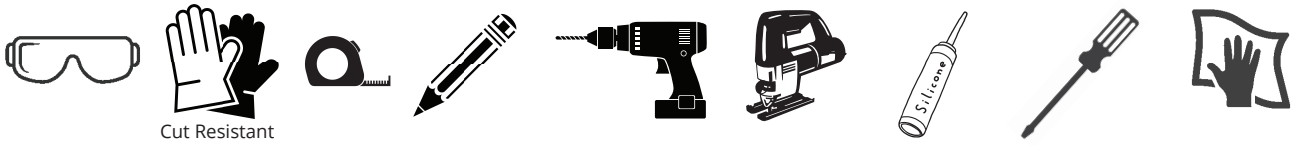

Installation

WARNING: Always wear safety goggles and gloves when using power tools or handling the sink to prevent personal injury.

1 Position the sink upside down on the countertop.

Trace a line around the edge of the sink.

Draw a line 5/16" inside of the outline of the sink.

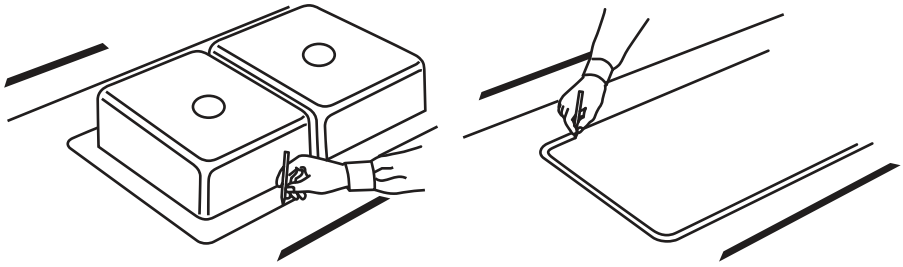

2 Drill a pilot hole in all four corners of the inside line.

Use a saber or jig saw to cut on the inside line.

Place a support underneath the cutout portion of the countertop to prevent it from falling during cutting.

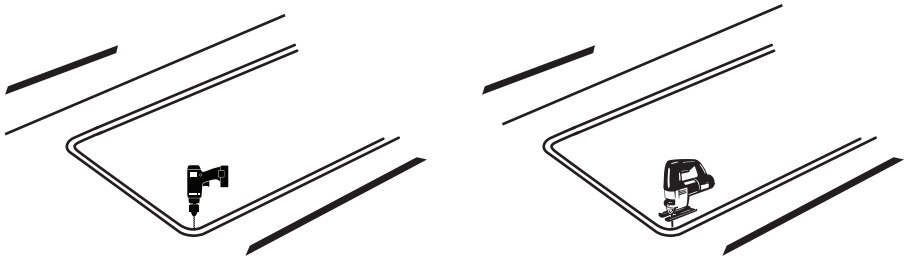

3 Apply silicone caulk (not included) around the cutout in the countertop surface.

Carefully lower the sink into the cutout.

Assemble the clips and screws.

From the underside, place a clip in the center along each side and hand tighten to hold sink in place. Fasten the remaining clips along the edges and space them approximately 3" from each end, and equally along the font, back, and sides. For countertops thicker than 3/4", clips can be spaced as close as 1-1/2".

From the top, check the seal between the sink edge and countertop. Lightly tighten clips evenly with a screwdriver until the sink is tight to the countertop. Do not over tighten.

Wipe away any excess caulk with a rag.

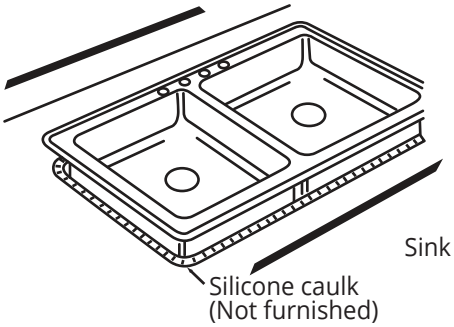

Installation Profile

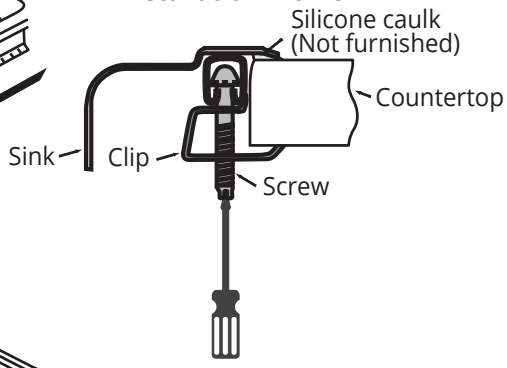

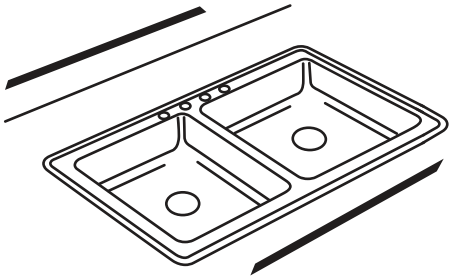

©2019 Elkay Manufacturing Company (8/19) 1000005236.pdf