


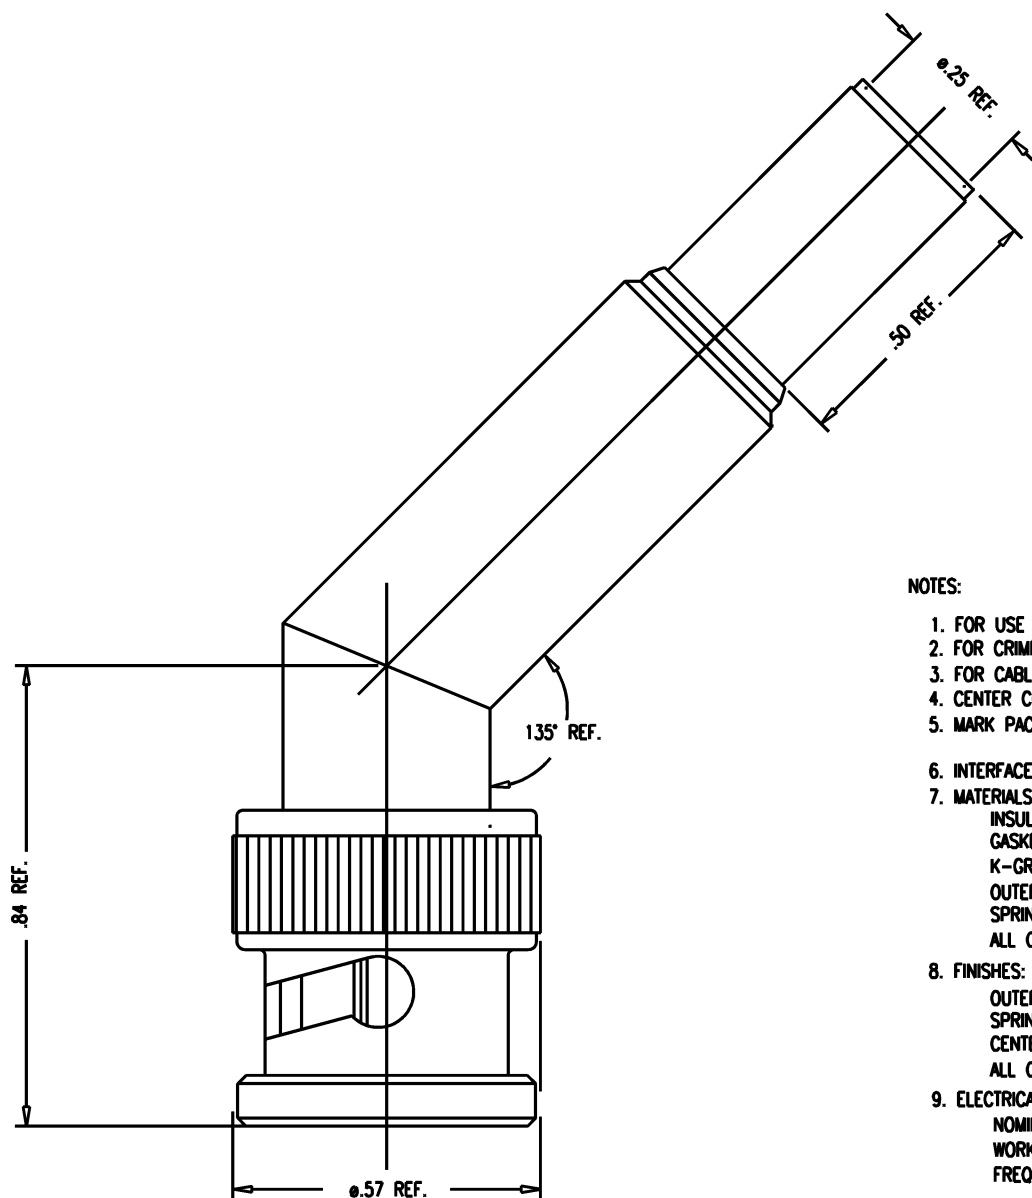

NOTES:

1. FOR USE WITH TYPE 734 CABLE.
2. FOR CRIMPING USE DIE KTH-2186.
3. FOR CABLING INSTRUCTIONS SEE 3-683 (BULK PACKAGING) OR 3-681 (BAG PACKAGING).
4. CENTER CONTACT AND K-GRIP SLEEVE TO BE SUPPLIED UNASSEMBLED.
5. MARK PACKAGE: KINGS 2026-35-9
YRWK (DATE CODE)
6. INTERFACE PER MIL-STD-348, FIG. 301-1 (AS APPLICABLE).
7. MATERIALS:
INSULATORS: TEFLON.
GASKET: SIL. RUB.
K-GRIP SLEEVE: BRASS OR COMMERCIAL BRONZE.
OUTER & ANGLE CONTACTS } BER. COP.
SPRING WASHER }
ALL OTHER PARTS: BRASS.
8. FINISHES:
OUTER CONTACT } SILVER PLATE.
SPRING WASHER }
CENTER CONTACTS: GOLD PLATE.
ALL OTHER METAL PARTS: NICKEL PLATE.
9. ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE: 75 OHMS
WORKING VOLTAGE: 500 VRMS
FREQUENCY RANGE: DC TO 2 GHz

SD

2026-35-9

REVISIONS

ISSUE	CHANGES
0	ER 38058 HVN 08/02/00

2026-35-9S

SCALE 4:1

APPROX SURFACE AREA

USED ON

REF: 2026-28-7

PL, 45 DEG. ANG
75 OHM BNC, M

DRAWN	HVN	DATE	08/02/00
DESIGN	MLT	DATE	05/28/98
APPR.		DATE	

KINGS

ELECTRONICS CO., INC.
ROCK HILL, SOUTH CAROLINA 29730

2026-35-9

SD