



see what Delta can do™

IN2ITION®

- 2-In-1 Shower
- 7-Spray Setting Hand Shower
- Additional Docking Mount for Hand Shower

FEATURES:

- Touch-Clean® Nozzles
- MagnaTite® Docking

STANDARD SPECIFICATIONS:

- Max flow rate 1.75 gpm at 80 psi, 6.6 L/min @ 550 kPa
- Integrated hand shower docks securely into shower head when not in use
- 3-Way diverter allows for single or shared operation of shower head and hand shower
- Change hand shower spray modes with easy turn dial
- Pause hand shower flow with push button pause in handle – pause is a non-positive shut-off
- 84" (2133) stainless steel hose (Chrome, SN finishes)
- 84" (2133 mm) UltraFlex® hose (RB, BL finishes)
- Ball connector swivel angle is 32° (16° per side)
- Additional Docking Mount for Hand Shower can swivel 35° forward to 5° backward.


WARRANTY

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) - 5 years from the date of purchase; or for commercial purchasers, 1 year from the date of purchase. No warranty is provided on batteries.




COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- EPA WaterSense®

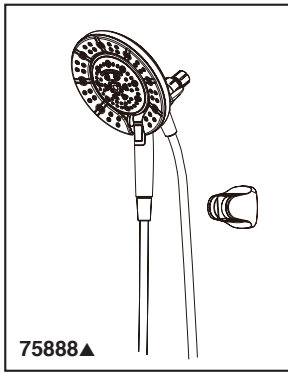

Submitted Model No.: _____

Specific Features: _____

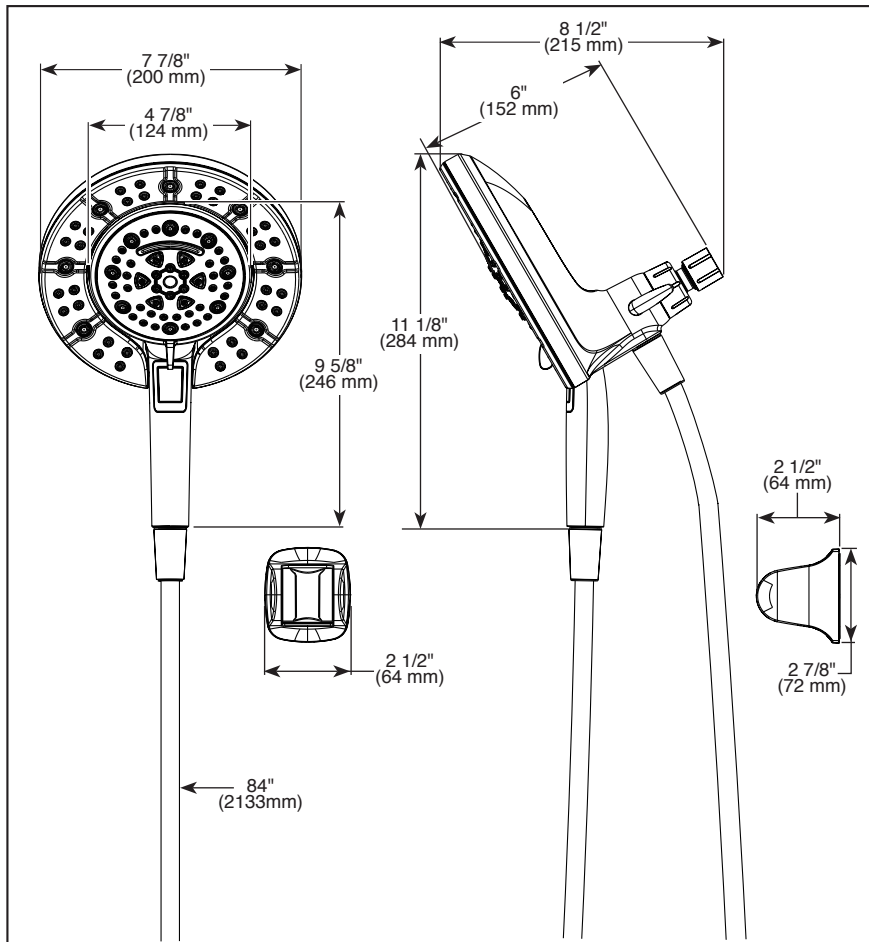

▲ Designate proper finish suffix

RP101859▲
Additional Docking Mount
for Hand Shower



Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.

DSP-B-75888 Rev. A

Delta Faucet Company

55 E. 111th Street, Indianapolis, IN 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2020 Delta Faucet Company