


General Assembly Guidelines


- I. Ensure that all parts and hardware are available before beginning assembly.
- II. Follow each step carefully to ensure the proper assembly of this product.
- III. Two people are recommended for ease in the assembly of this product.
- IV. The three main types of hardware used to assemble this product are: wood dowels, screws and bolts.
- V. The provided glue is to secure wood dowels in place. When first inserting dowels, locate the appropriate hole for the dowel, place a small amount of glue in the hole and insert the dowel. Wipe away excess glue immediately.




In future assembly steps when dowels are necessary to attach assembly parts together, place a small amount of glue on the end of the dowel before attaching parts together. Wipe away excess glue immediately.




VI. A Phillips head screwdriver is required for the assembly of this product.



VII. Power tools should not be used to assemble this product.




VIII. Drill may be needed for securing product to wall.

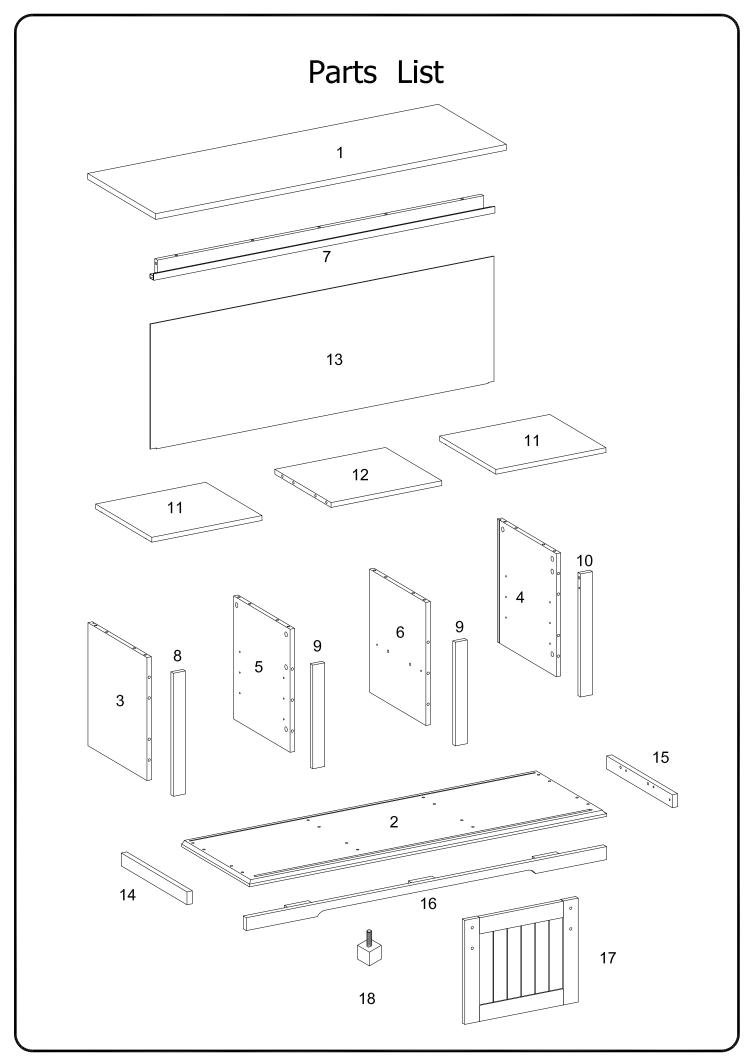



		Hardware	List		
А		Ø8x30mm	Wooden dowel	30	pcs
В		Ø6x32mm	Cam bolt	25	pcs
С		Ø15x11mm	Cam lock	25	pcs
D	aaaaaa ()	Ø6x50	Screw	8	pcs
Е		M4	Hex Key	1	рс
F		Ø6x12mm	Bolt	18	pcs
G	DD		Shelf support pin	8	pcs
Н			Glue tube	1	рс
J		Ø4x12mm	Screw	4	pcs
К			Pulley	2	pcs
L	lo lo		Connecting iron sheet	2	pcs
М	J.		Connector	7	pcs
N			Plastic wedge	6	pcs
Ρ	0	Ø30mm	Sticker	25	pcs
Q			Plate	2	pcs
R		M6x12mm	Bolt	4	pcs
S	<uunint (f)<="" td=""><td>Ø3x17mm</td><td>Screw</td><td>6</td><td>pcs</td></uunint>	Ø3x17mm	Screw	6	pcs
Philips head screwdriver required for assembly (not included) The hardware quantities listed above are required for proper assembly.					


The hardware quantities listed above are required for proper assembly. Some extra hardware may also have been included.

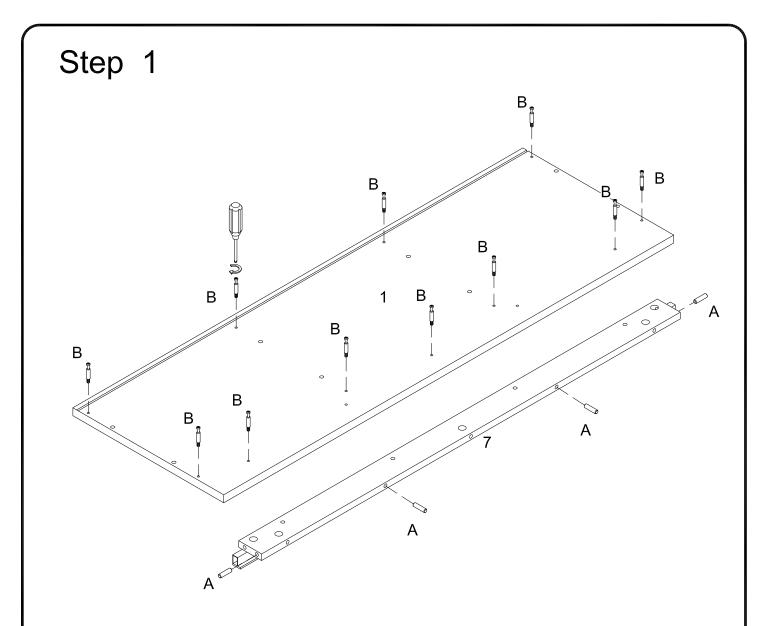


Insert wooden dowel (A) into part (7), then secure cam bolt (B) into part (1) with Philips head screwdriver as per diagram.

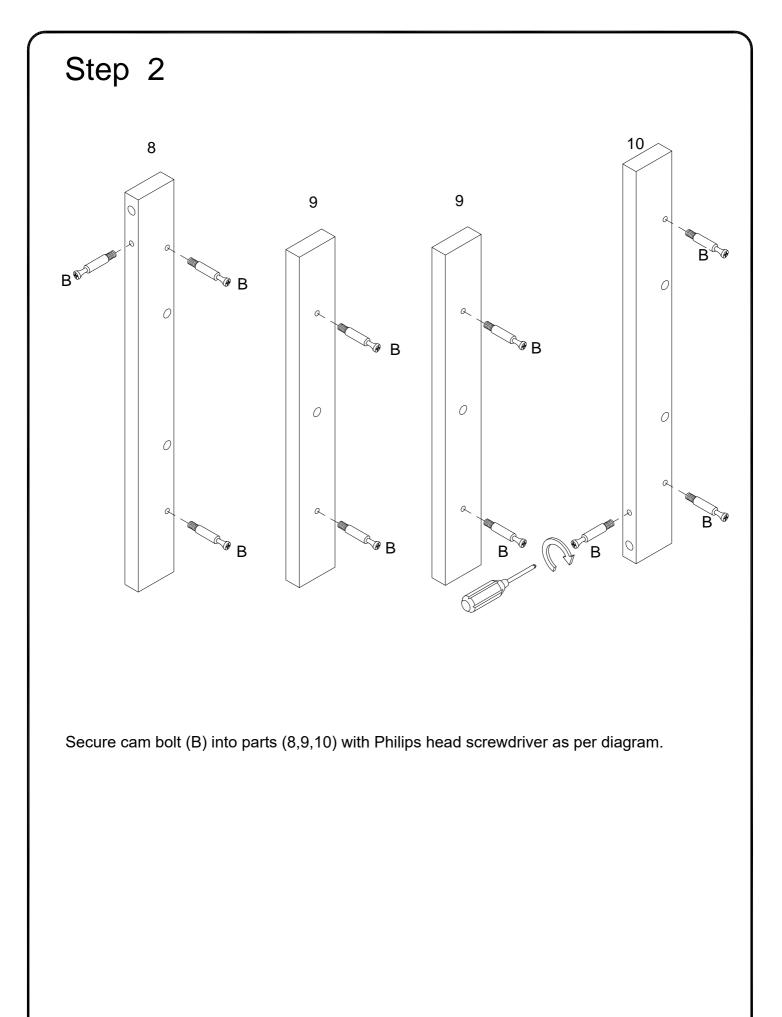


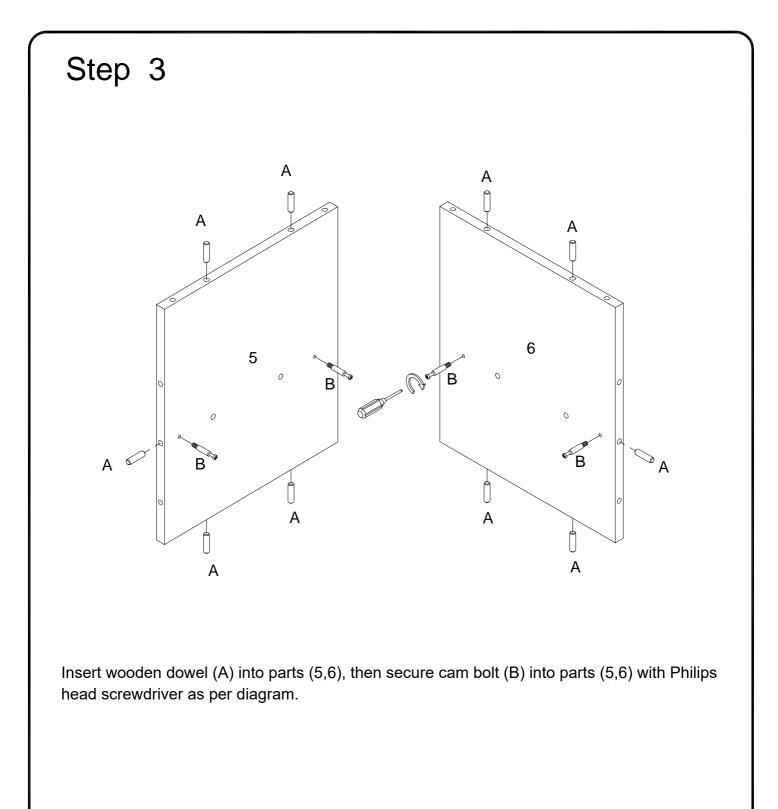

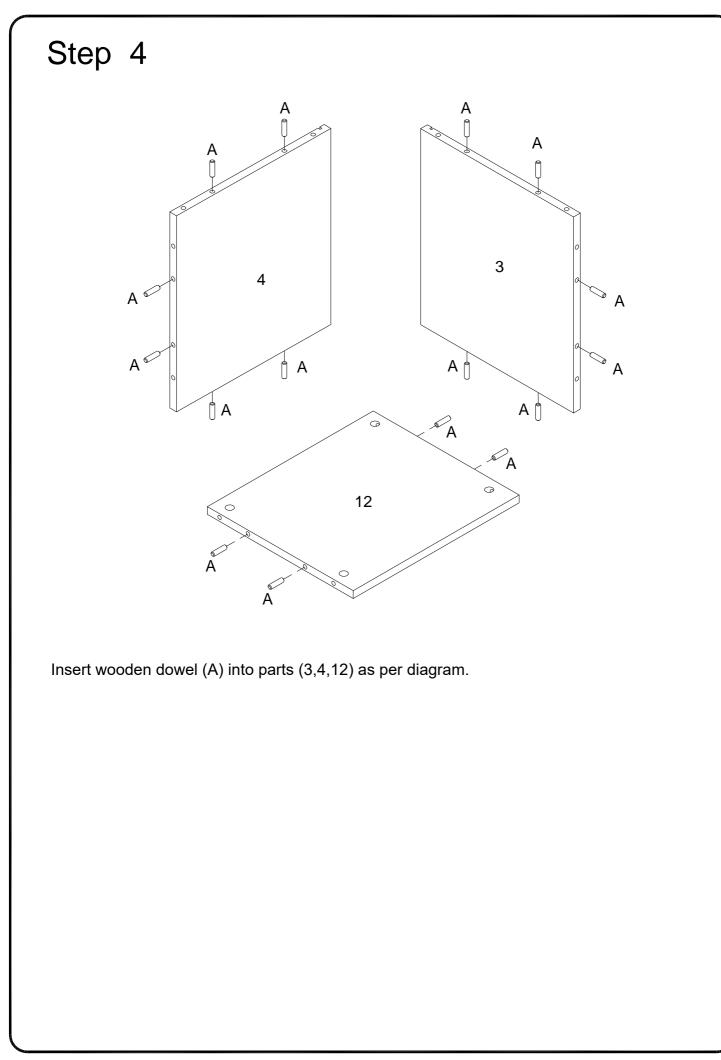


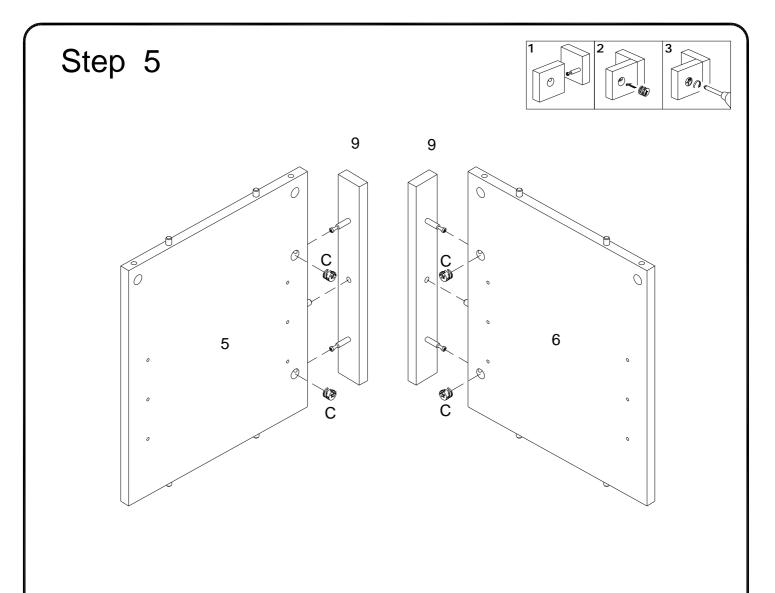



Using cam lock(C) secure part (9) into parts (5,6) with Philips head screwdriver as per diagram.

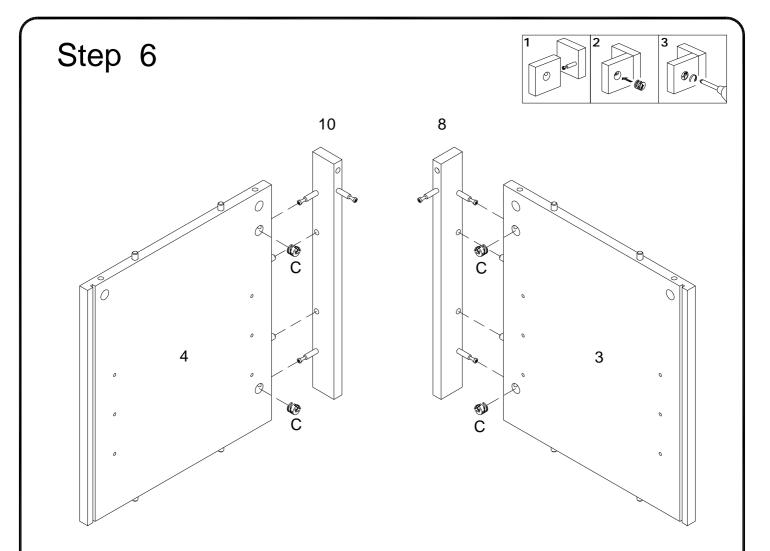



Using cam lock(C) secure part (10) into part (4) ,part (8) into part (3) with Philips head screwdriver as per diagram.

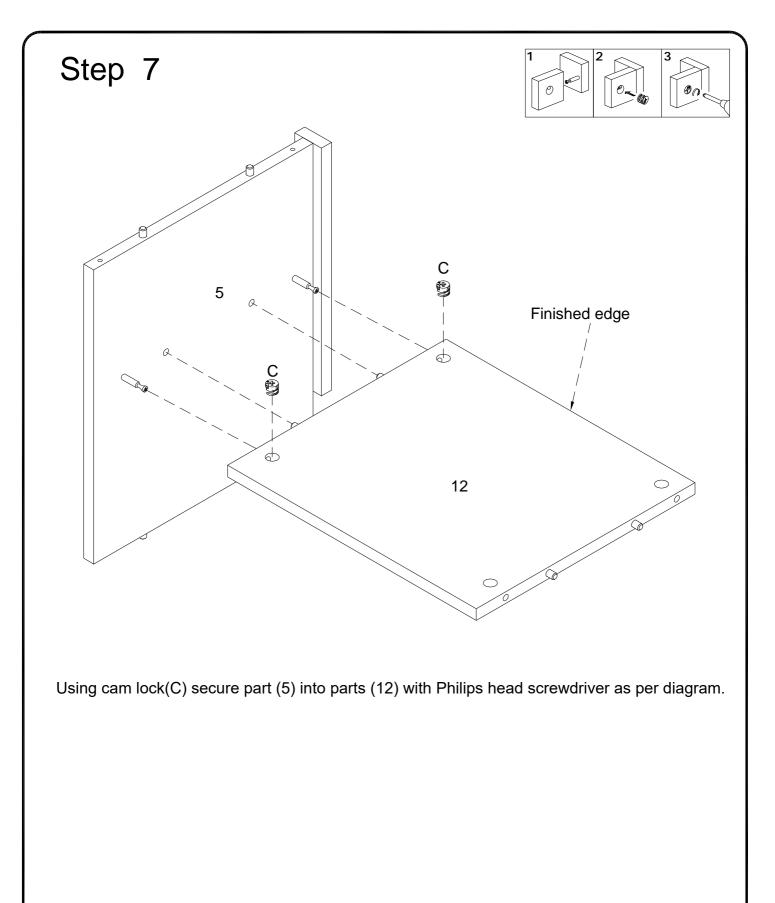

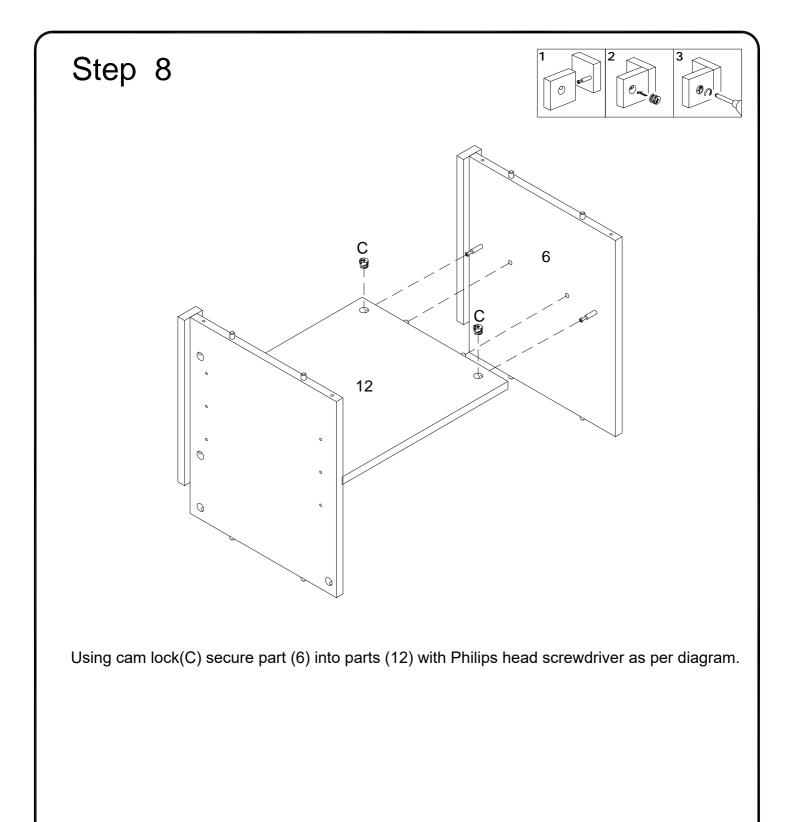


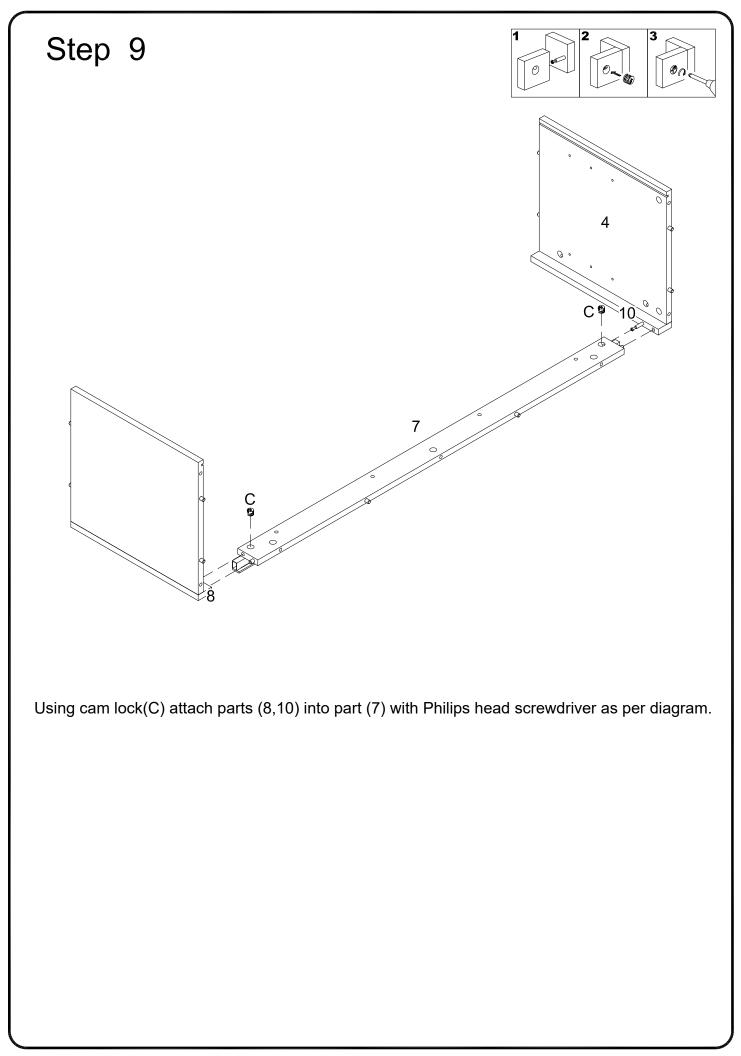


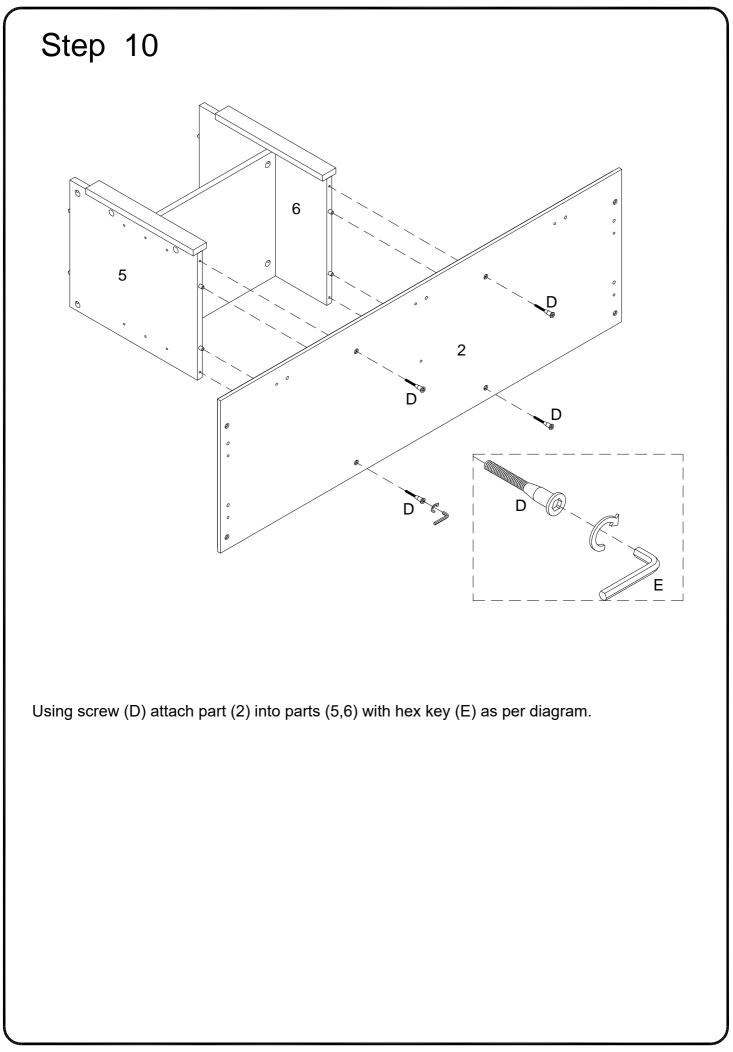


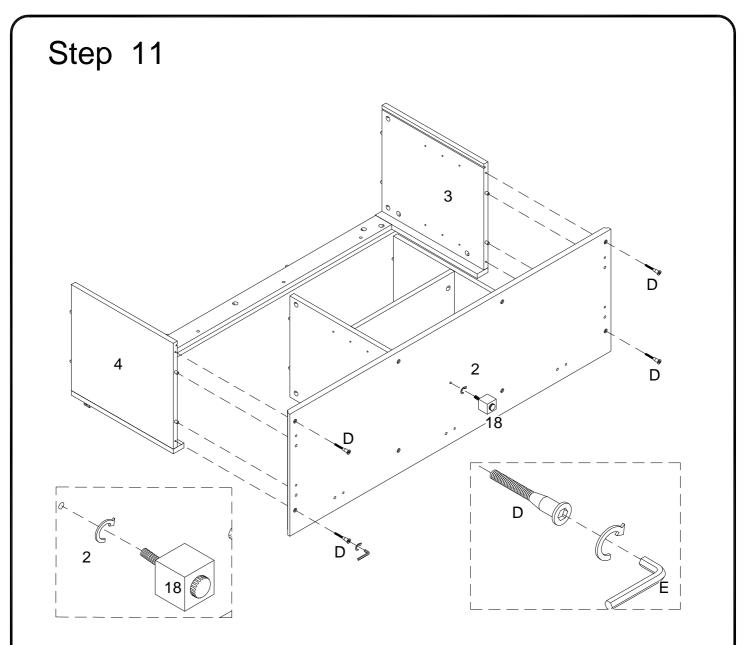


Secure part (18) into part (2),then using screw (D) attach part (2) into parts (3,4) with hex key (E) as per diagram.

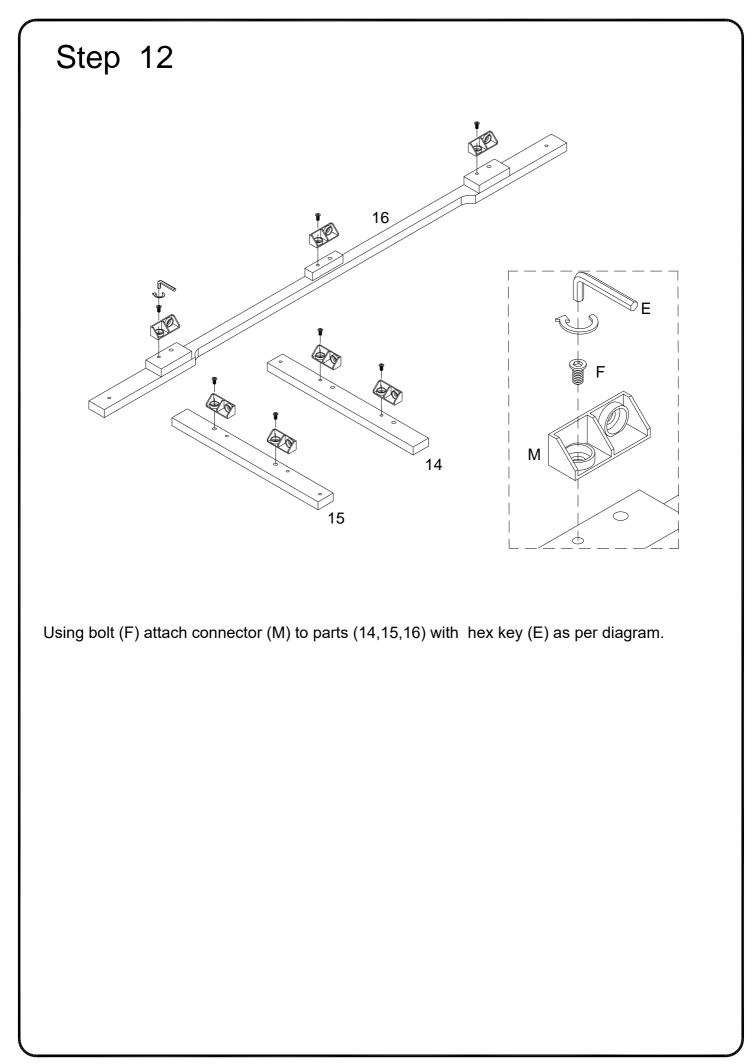


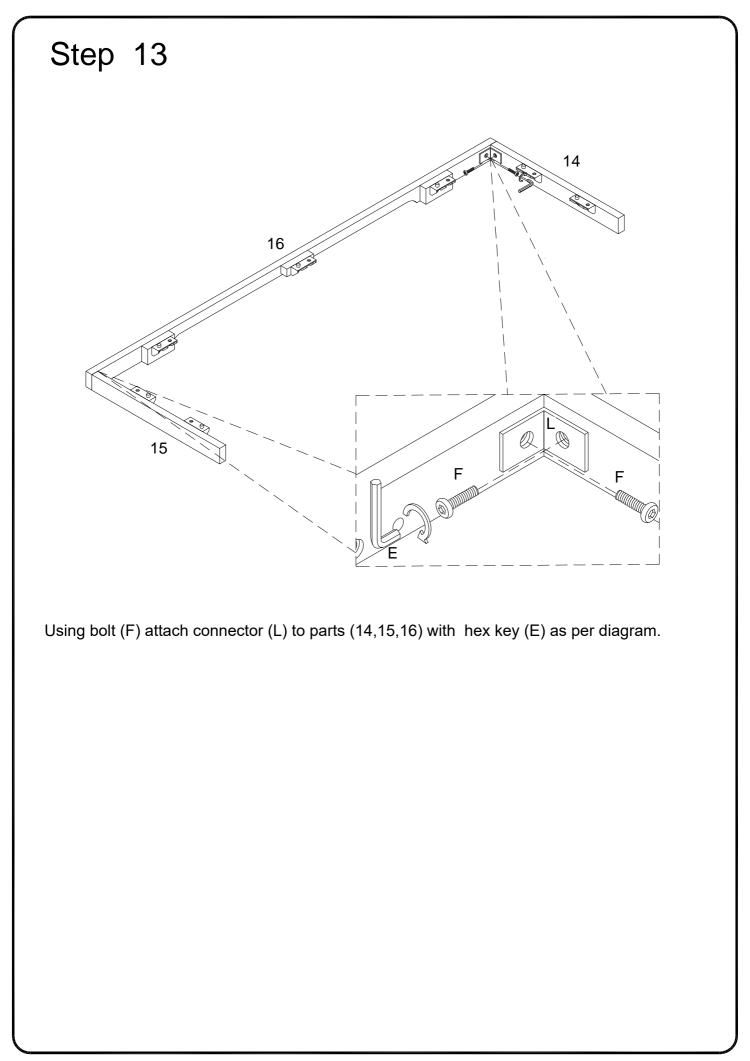


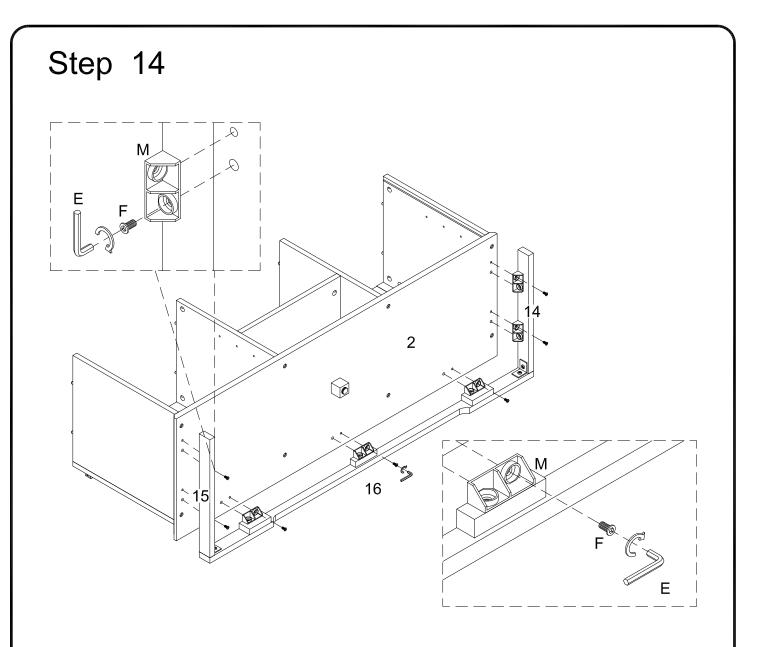



Using bolt (F) attach connector (M) to part (2) with hex key (E) as per diagram.

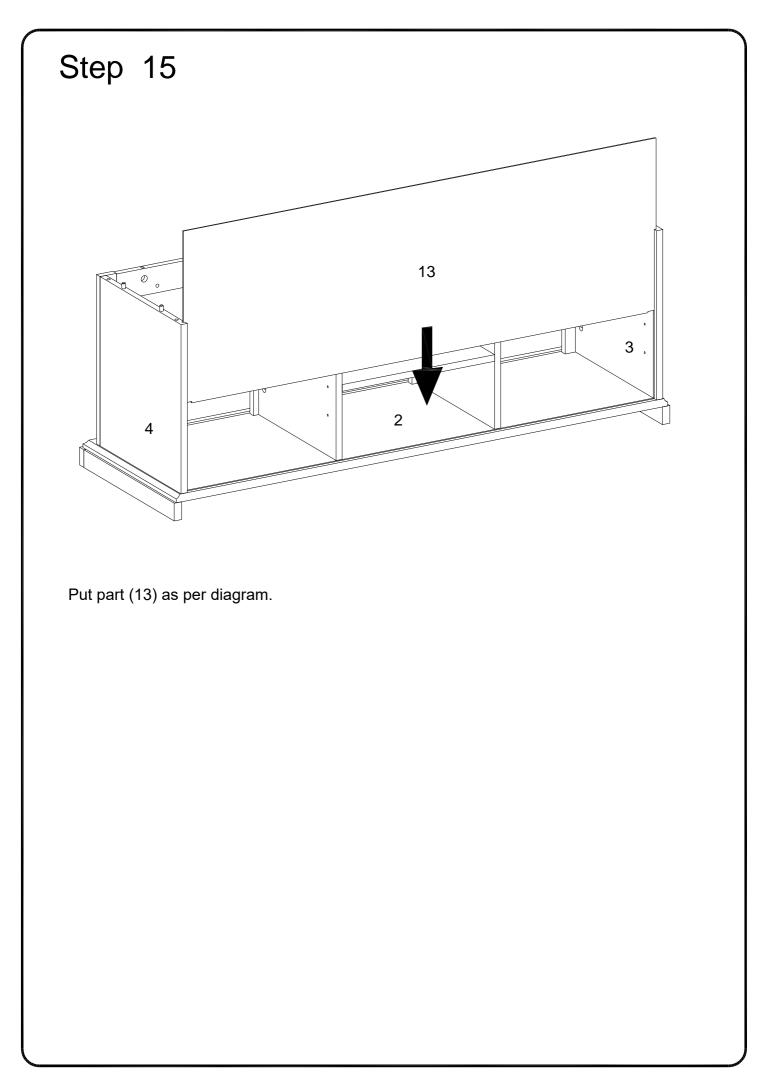

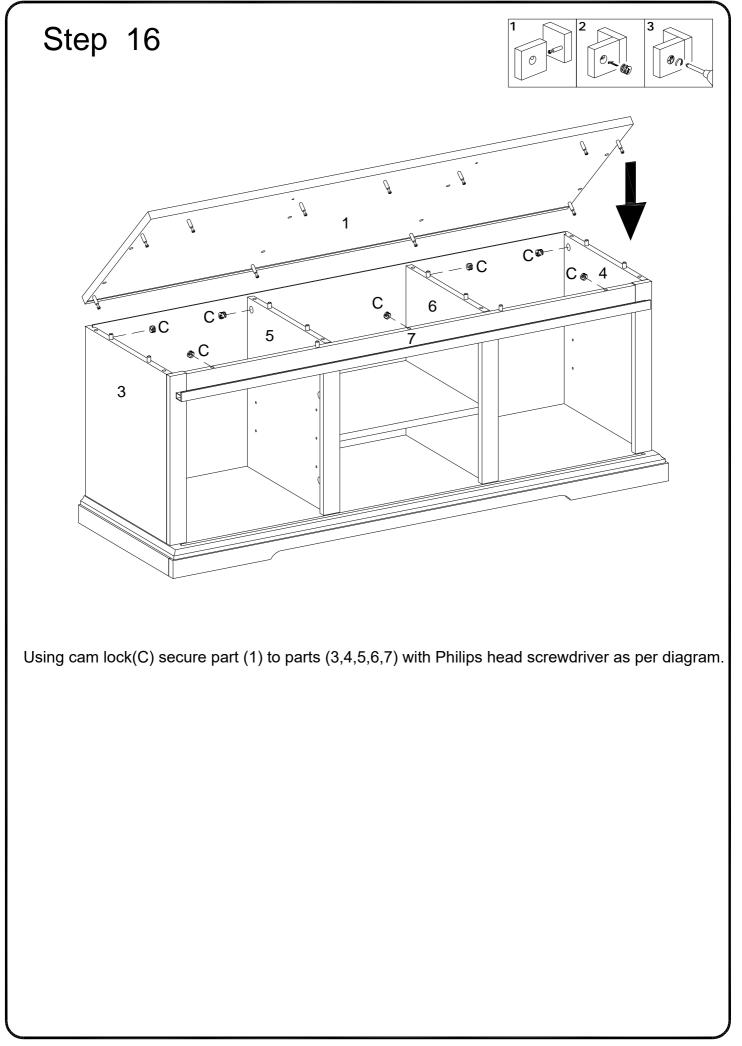


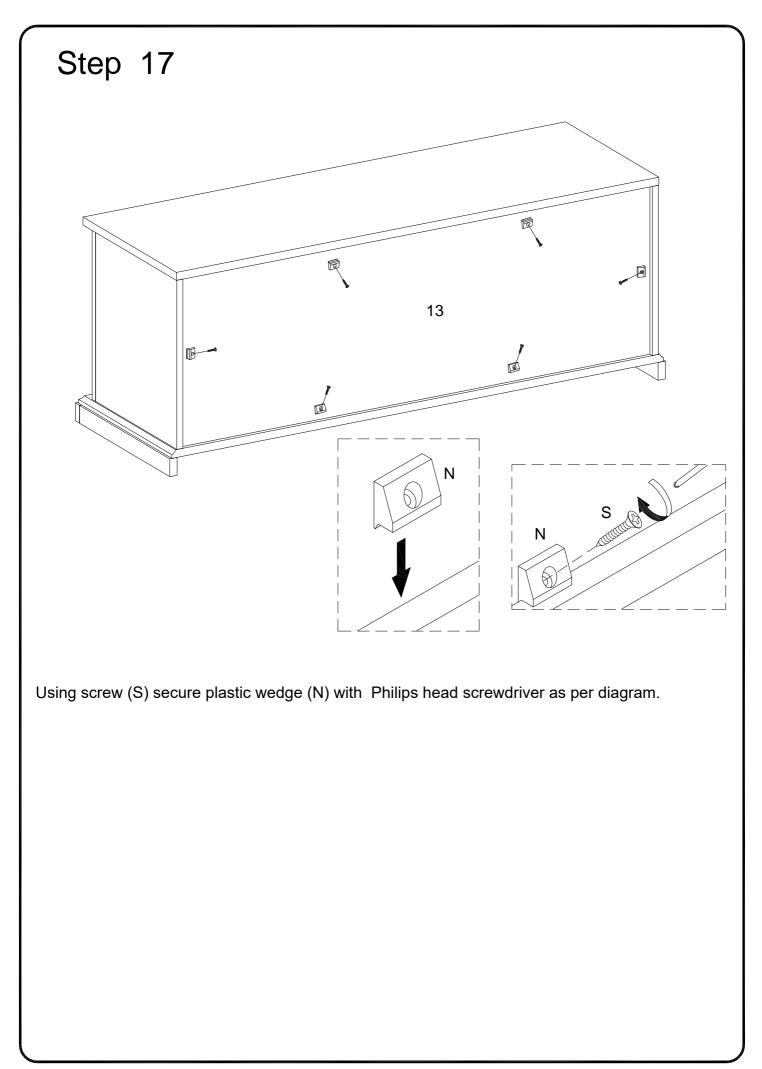

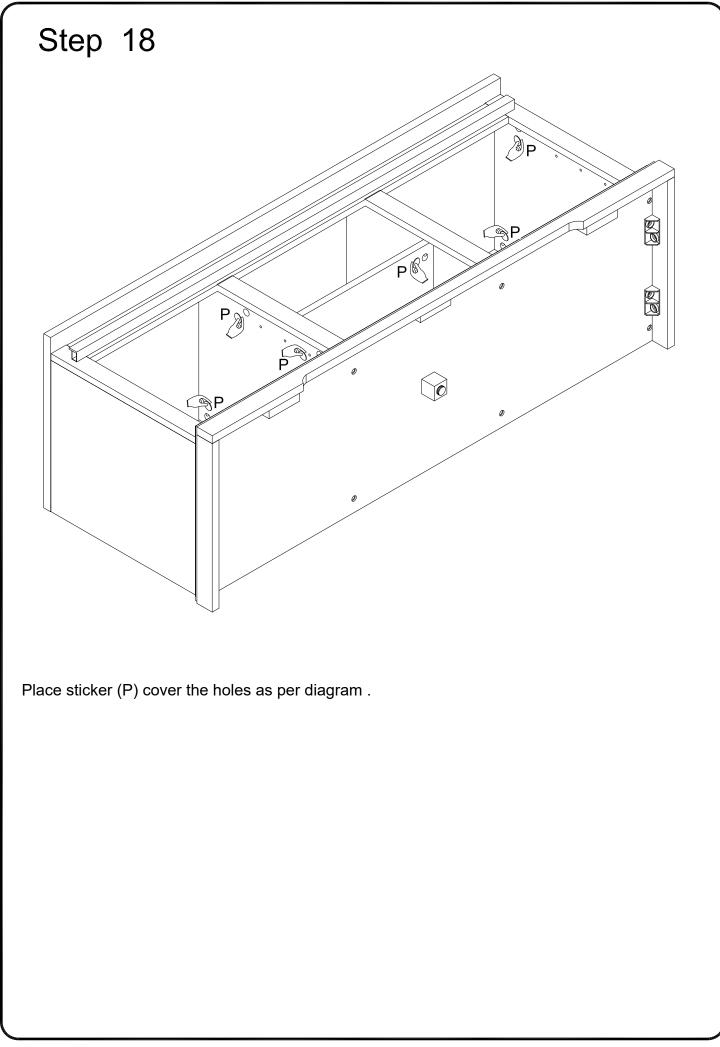

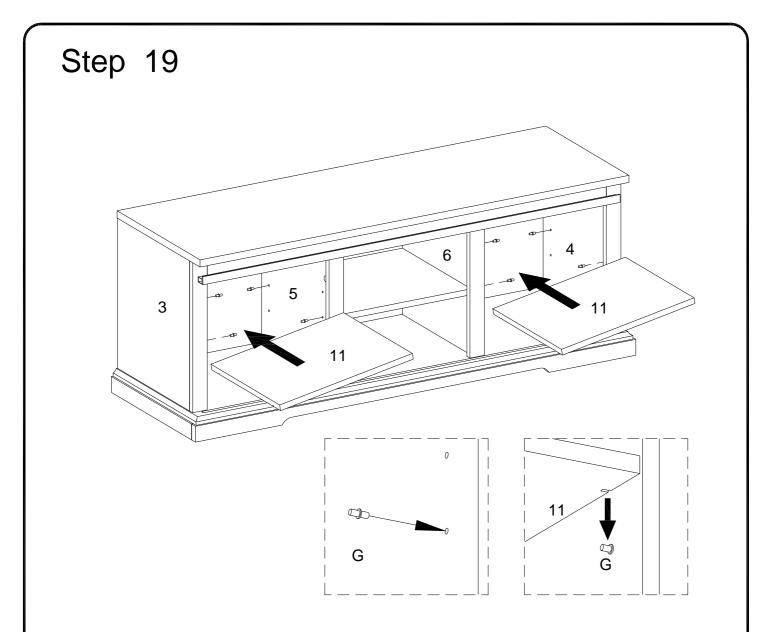

Insert shelf support pin (G) into parts (3,4,5,6) as per diagram. Make sure you place the four shelf support pins (G) in the same level. So the shelf is not titled .Put part (11) into unit as per diagram. Tilt and rest the adjustable shelf(11) onto the shelf support pins .

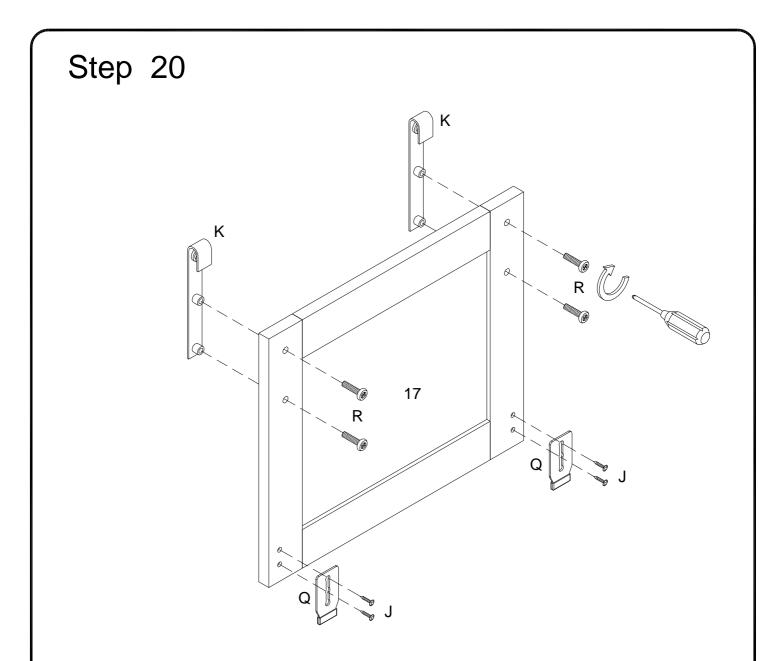

Using bolt (R) secure pulley (K) into part (17) ,then using screw (J) attach plate (Q) into part (17) with Philips head screwdriver as per diagram.

